


FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY	TOTAL
PAVEMENT MARKINGS			
<u>THERMOPLASTIC (4", 90 MILS)</u>			
TA	WHITE EDGELINE	1300 LF	TOTAL 1300 LF
<u>THERMOPLASTIC (4", 120 MILS)</u>			
TD	2 FT. WHITE MINISKIP	13 LF	TOTAL 2763 LF
TE	WHITE SOLID LANE LINE	250 LF	
TI	YELLOW DOUBLE CENTER	2500 LF	
<u>THERMOPLASTIC (8", 90 MILS)</u>			
TT	YELLOW DIAGONAL	200 LF	TOTAL 200 LF
<u>THERMOPLASTIC (24", 120 MILS)</u>			
T2	WHITE STOPBAR	44 LF	TOTAL 44 LF
<u>THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MILS)</u>			
UA	LEFT TURN ARROW	6 EA	TOTAL 6 EA
MARKERS			
<u>PERMANENT RAISED PAVEMENT MARKERS</u>			
MA	YELLOW & YELLOW	35 EA	TOTAL 48 EA
MB	CRYSTAL & RED	13 EA	

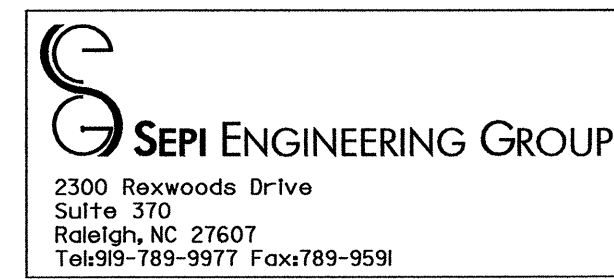

APPROVED: _____ DATE: _____

SEAL

12-6-04

FINAL PAVEMENT MARKING SCHEDULE

SCALE: NONE		REVISIONS
DATE: 11/03		
DWG. BY: NH		
DESIGN BY: NH		
REVIEWED BY: RLW/ SSA		