




PROJ. REFERENCE NO.	SHEET NO.
U-2905A	PM-1


### PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS	PAY ITEM QUANTITY	
			BREAKDOWN	TOTAL QUANTITY
TA	WHITE EDGELINE	THERMOPLASTIC (100MM, 2.3MM)	38	M
TB	YELLOW EDGELINE		424	M
			TOTAL	462 M
TC	3 M. WHITE SKIP	THERMOPLASTIC (100MM, 3.1MM)	81	M
TD	0.5 M. WHITE MINISKIP		40	M
			TOTAL	121 M
TP	WHITE GORELINE	THERMOPLASTIC (200MM, 2.3MM)	200	M
			TOTAL	200 M
T2	WHITE STOPBAR	THERMOPLASTIC (600MM, 3.1MM)	8	M
			TOTAL	8 M
UB	RIGHT TURN ARROW	THERMOPLASTIC PAVEMENT MARKING SYMBOLS (2.3MM)	1	EA
UC	STRAIGHT ARROW		7	EA
			TOTAL	8 EA
CC	3 M. WHITE SKIP	COLD APPLIED PLASTIC (100MM)	24	M
CD	0.5 M. WHITE MINISKIP		12	M
			TOTAL	36 M
DB	RIGHT TURN ARROW	COLD APPLIED PLASTIC PAVEMENT MARKING SYMBOL	1	EA
			TOTAL	1 EA
MB	CRYSTAL & RED	PERMANENT RAISED PAVEMENT MARKERS	2	EA
			TOTAL	2 EA
MF	CRYSTAL & RED	SNOWPLOWABLE RAISED PAVEMENT MARKERS	61	EA
			TOTAL	61 EA
			TEMPORARY PAVEMENT MARKINGS	
PA	WHITE EDGELINE	PAINT (100MM)	50	M
PB	YELLOW EDGELINE	PAINT (200MM)	50	M
			TOTAL	100 M
PR	WHITE GORELINE	PAINT (200MM)	100	M
			TOTAL	100 M

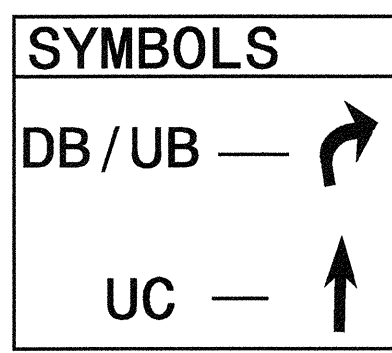

SEE R.S.D 1250.01 AND 1253.01 FOR PAVEMENT MARKER SPACING AND SNOWPLOWABLE RAISED PAVEMENT MARKERS.

SEE R.S.D 1267.01, 1267.02 AND 1267.03 FOR FLEXIBLE DELINEATOR INSTALLATION AND SPACING.

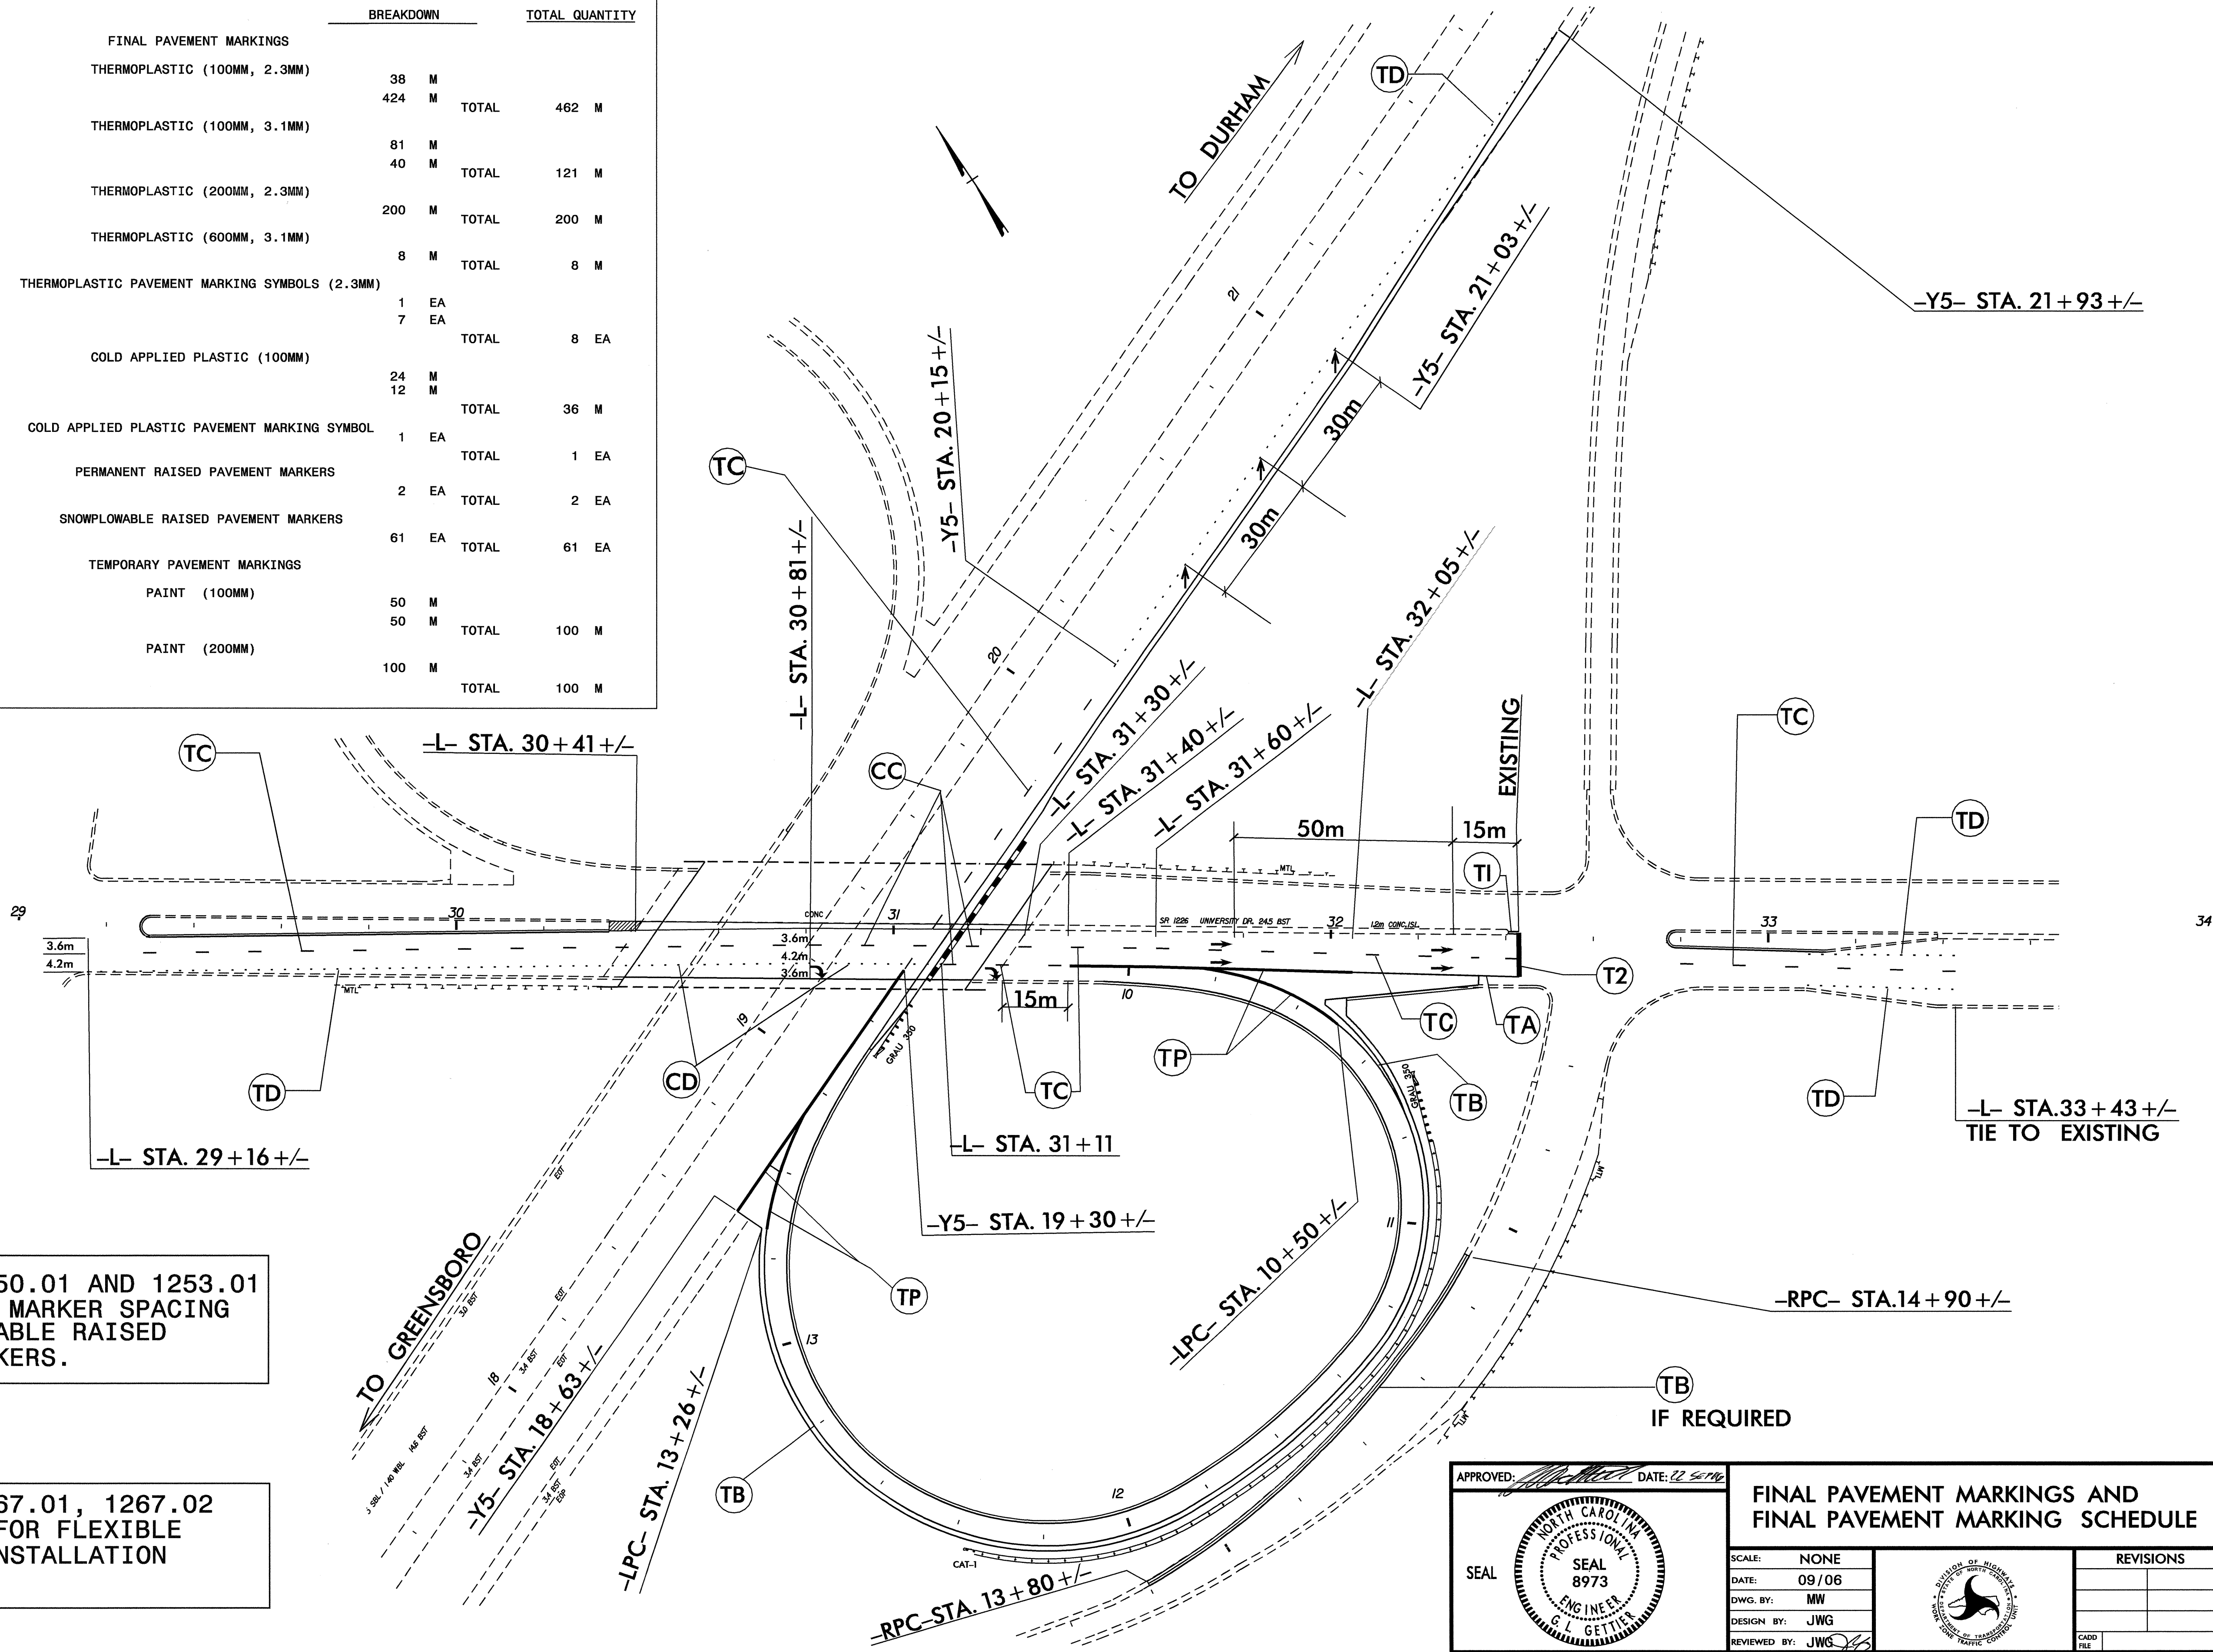

APPROVED: DATE: 09/06

SEAL

**FINAL PAVEMENT MARKINGS AND FINAL PAVEMENT MARKING SCHEDULE**

SCALE:	NONE		<table border="1"> <tr> <th colspan="2">REVISIONS</th> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>	REVISIONS							
REVISIONS											
DATE:	09/06										
DWG. BY:	MW										
DESIGN BY:	JWG										
REVIEWED BY:	JWG	CADD FILE									

20-SEP-2006 14:02 \\dot\dfsroot\proj\hiprojects-u2905\traffic\trafficcontrol\top\loop c\U-2905A\_TC\_TCP\_PM-1.dgn mwshayv AT WTC224168