

8/17/04

T.I.P.: B-3406

CONTRACT: C201582


TIP NO. B-3406	SHEET NO. SIGN - 1
-------------------	-----------------------

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLANS
AVERY COUNTY

LOCATION: BRIDGE NO. 28 OVER CURTIS CREEK ON SR 1321

ROADWAY STANDARD DRAWINGS
APPLICABLE TO THESE SIGNING PLANS
904.10
904.50

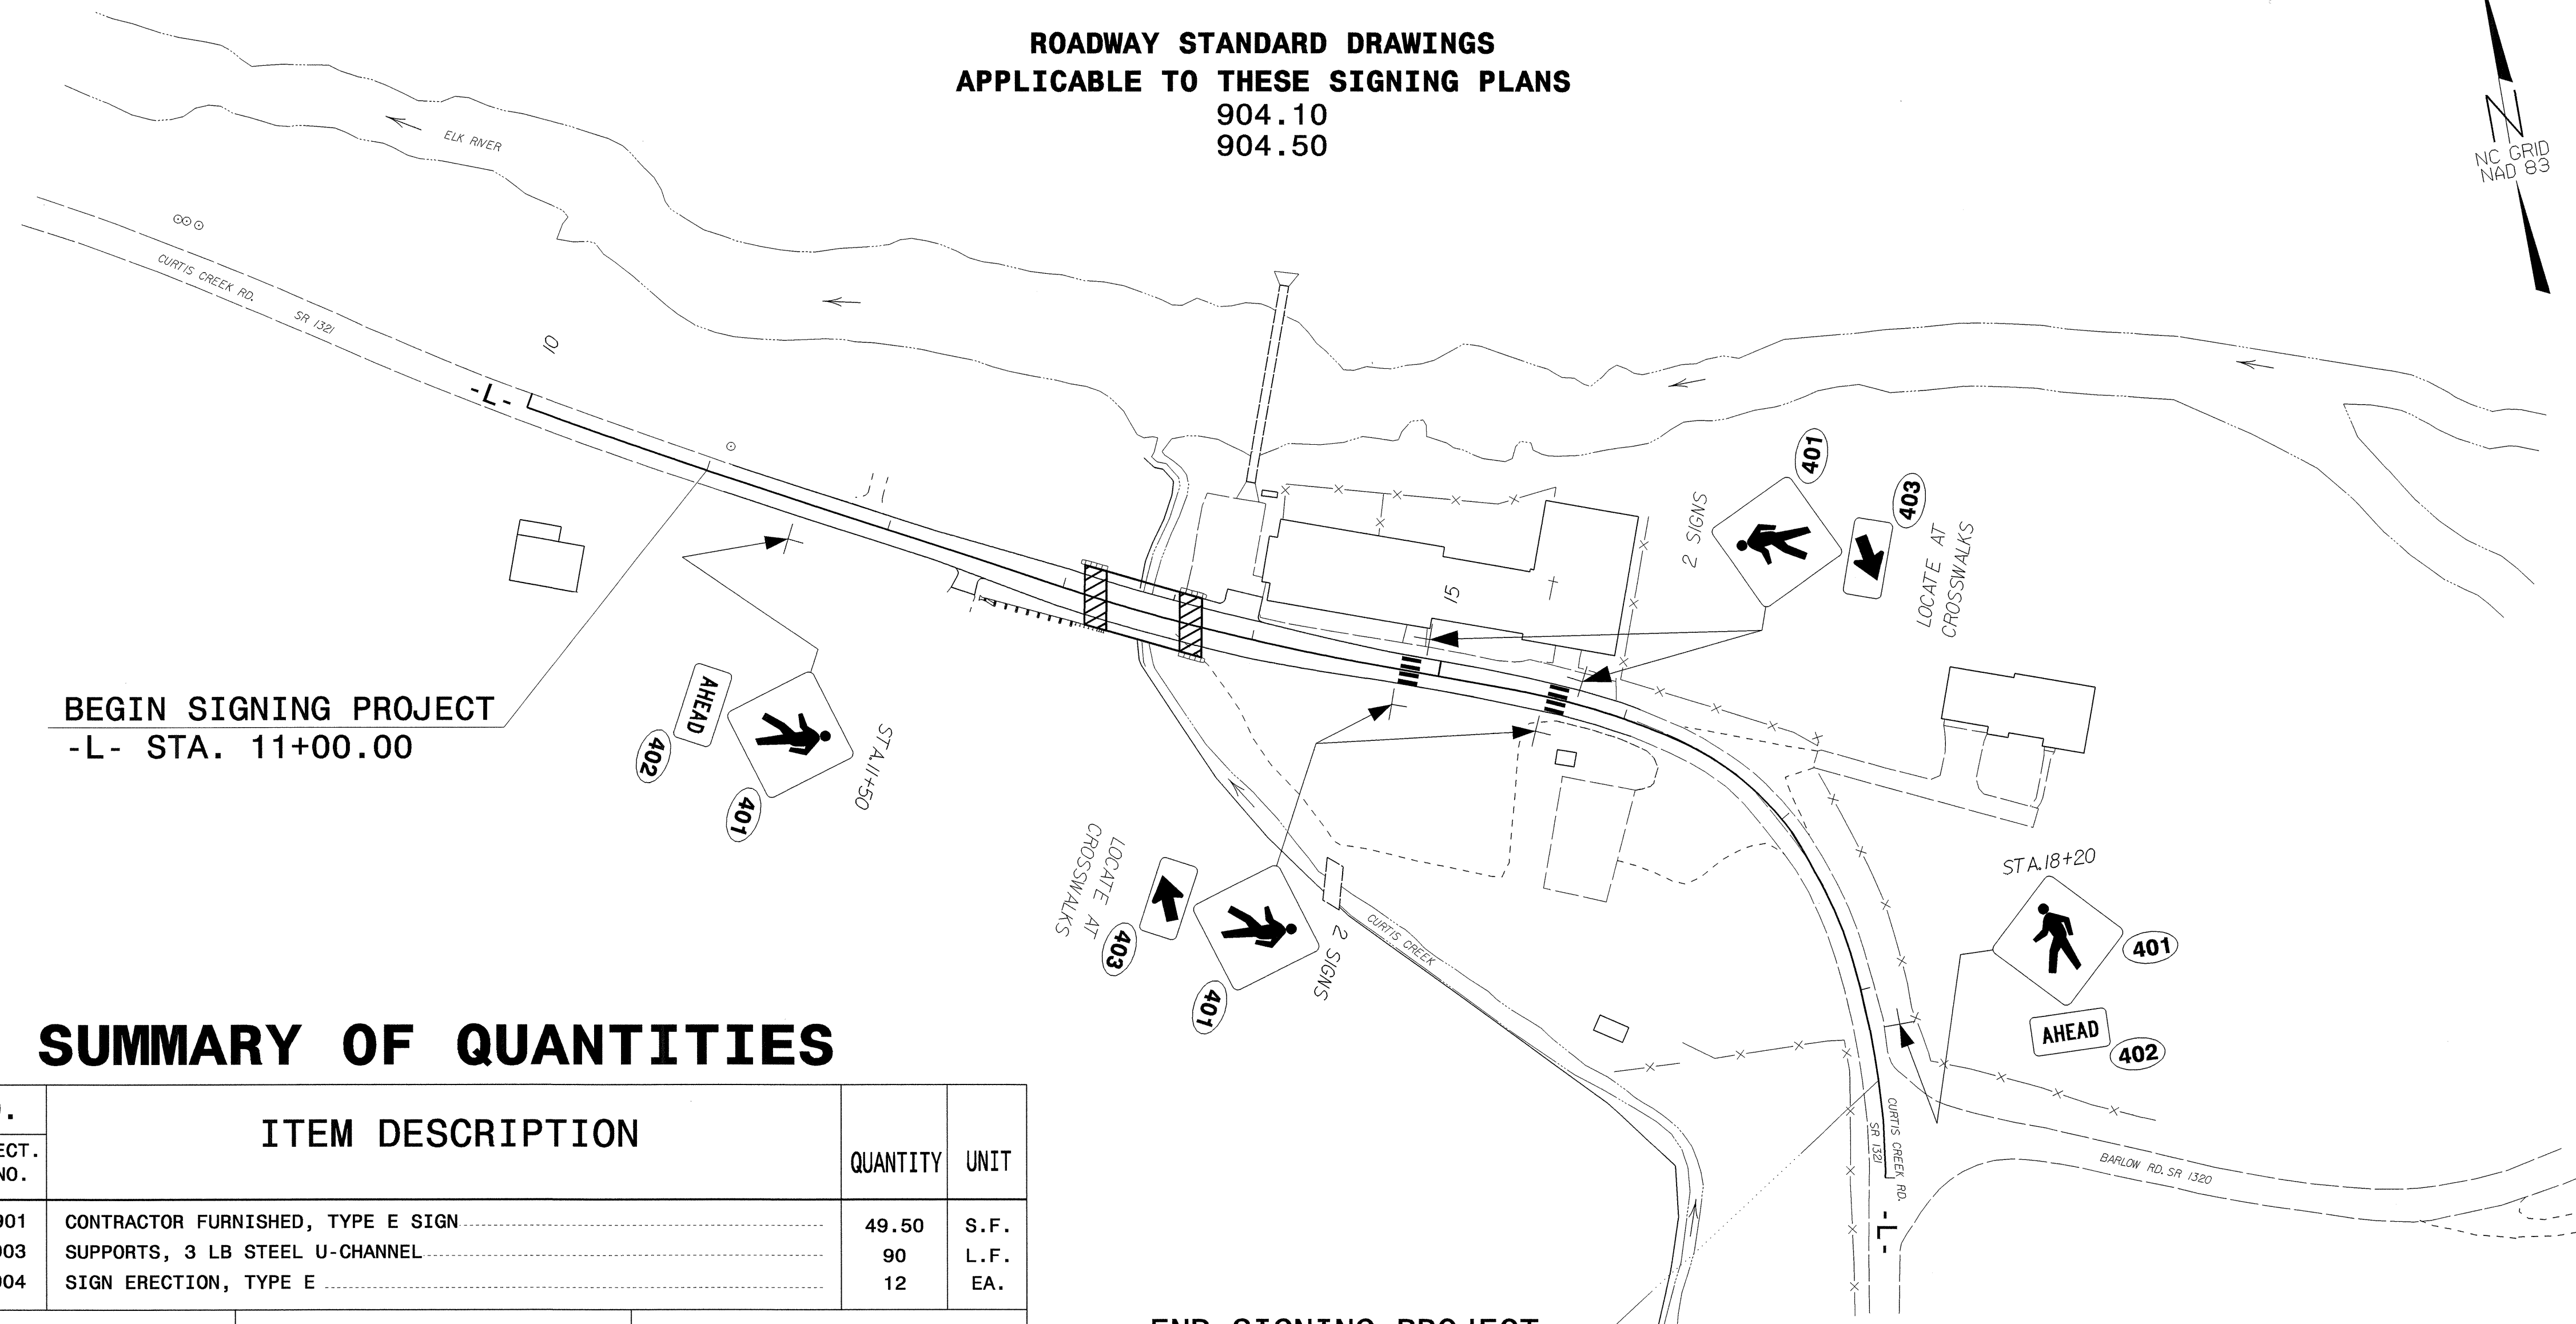

BEGIN SIGNING PROJECT
-L- STA. 11+00.00

END SIGNING PROJECT
-L- STA. 18+50.00

SUMMARY OF QUANTITIES

ITEM NO.	ITEM DESCRIPTION		QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4025000000	901	CONTRACTOR FURNISHED, TYPE E SIGN	49.50	S.F.
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	90	L.F.
4102000000	904	SIGN ERECTION, TYPE E	12	EA.

401 QUANTITY REQ'D 6

YELLOW/GREEN REFLECTIVE SHEETING
ONE "U" POST PER SIGN

402 QUANTITY REQ'D 2

YELLOW/GREEN REFLECTIVE SHEETING
MOUNT BELOW SIGN 401
IN 2 INSTALLATIONS

403 QUANTITY REQ'D 4

YELLOW/GREEN REFLECTIVE SHEETING
MOUNT BELOW SIGN 401
IN 4 INSTALLATIONS

NOTES

- SEE ROADWAY STANDARD NO. 904.50 FOR MOUNTING OF TYPE 'D', 'E', AND 'F' SIGNS ON 'U' CHANNEL POSTS.
- SIGNS FURNISHED BY CONTRACTOR.

PLAN PREPARED BY: N.C.D.O.T. SIGNING SECTION

R.W. KING, PE SIGNING ENGINEER
A.I. ALQUDWAH, PE SIGNING PROJECT ENGINEER
D.M. EATON SIGNING PROJECT DESIGN ENGINEER

SEAL