

- 17 INSTALL CABLE(S) IN EXISTING CONDUIT
- 18 INSTALL CABLE(S) IN NEW CONDUIT
- 19 INSTALL CABLE(S) IN EXISTING RISER
- 20 INSTALL CABLE(S) IN NEW RISER
- 21 INSTALL CABLE(S) IN EXISTING CONDUIT STUBOUTS
- 22 INSTALL NEW CONDUIT INTO EXISTING CABINET BASE (USE EXISTING CONDUIT STUB-OUTS WHEN AVAILABLE)
- 23 INSTALL NEW RISER INTO EXISTING CABINET BASE (USE EXISTING CONDUIT STUB-OUTS WHEN AVAILABLE)
- 24 INSTALL NEW CONDUIT INTO EXISTING POLE MOUNTED CABINET
- 25 INSTALL NEW RISER INTO EXISTING POLE MOUNTED CABINET
- 26 TERMINATE COMMUNICATIONS CABLE ON EXISTING TELEMETRY INTERFACE PANEL IN TRAFFIC SIGNAL CONTROLLER CABINET
- 27 INSTALL NEW TELEMETRY INTERFACE PANEL IN TRAFFIC SIGNAL CONTROLLER CABINET
- 28 INSTALL INTERCONNECT CENTER, PATCH PANEL, JUMPERS, AND FUSION SPLICE CABLE IN CABINET
- 29 INSTALL UNDERGROUND SPLICE ENCLOSURE
- 30 INSTALL AERIAL SPLICE ENCLOSURE
- 31 INSTALL POLE MOUNTED SPLICE CABINET
- 32 INSTALL BASE MOUNTED SPLICE CABINET
- 33 REMOVE EXISTING SPLICE CABINET

- 34 INSTALL CABLE STORAGE RACKS (SNOW SHOES) AND STORE 500 FEET OF GASTONIA ELECTRIC CABLE
- 35 REMOVE EXISTING CABINET FOUNDATION
- 36 INSTALL CCTV CAMERA ASSEMBLY
- 37 INSTALL CCTV CAMERA WOOD POLE
- 38 INSTALL CCTV CAMERA METAL POLE AND FOUNDATION
- 39 INSTALL JUNCTION BOX
- 40 INSTALL OVERSIZED JUNCTION BOX
- 41 REMOVE EXISTING JUNCTION BOX
- 42 INSTALL WOOD POLE
- 43 REMOVE EXISTING WOOD POLE
- 44 INSTALL AERIAL GUY ASSEMBLY
- 45 INSTALL STANDARD GUY ASSEMBLY
- 46 INSTALL SIDEWALK GUY ASSEMBLY
- 47 INSTALL MESSENGER CABLE
- 48 REMOVE EXISTING COMMUNICATIONS CABLE AND MESSENGER CABLE
- 49 REMOVE EXISTING COMMUNICATIONS CABLE
- 50 INSTALL TELEPHONE SERVICE
- 51 INSTALL CABLE STORAGE RACKS (SNOW SHOES) AND STORE 100 FEET OF SIGNAL SYSTEM CABLE


- 52 INSTALL CABLE STORAGE RACKS (SNOW SHOES) AND STORE 500 FEET OF GASTONIA ELECTRIC CABLE
- 53 INSTALL FIBER OPTIC DELINEATOR MARKER
- 54 STORE 20 FEET OF COMMUNICATIONS CABLE
- 55 LASH CABLE(S) TO EXISTING SIGNAL/COMMUNICATIONS CABLE
- 56 LASH CABLE(S) TO EXISTING MESSENGER CABLE
- 57 LASH CABLE(S) TO NEW MESSENGER CABLE
- 58 MODIFY EXISTING ELECTRICAL SERVICE
- 59 INSTALL NEW ELECTRICAL SERVICE
- 60 INSTALL VIDEO OPTIC TRANSMITTER WITH DATA
- 61 INSTALL FIBER OPTIC TRANSCIEVER
- 62 REMOVE EXISTING CONTROLLER AND CABINET
- 63 INSTALL NEW CONTROLLER
- 64 INSTALL SPECIAL JUNCTION BOX
- 65 INSTALL SYSTEM LOOP
- 66 INSTALL SYSTEM LOOP AMPLIFIER
- 67 INSTALL SYSTEM LOOP LEAD-IN CABLE
- 68 MODIFY EXISTING CABINET FOUNDATION

- 68 INSTALL UNI-DIRECTIONAL YAGI ANTENNA
- 69 INSTALL OMNI-DIRECTIONAL ANTENNA
- 70 INSTALL RADIO TRANSCIEVER
- 71 REPLACE EXISTING WEATHERHEAD WITH HEAT SHRINK TUBING
- 72 INSTALL NEW 332 BASE MOUNTED CABINET
- 73 INSTALL NEW 336S POLE MOUNTED CABINET
- 74 INSTALL TERMINAL SPLICE BOX
- 75 INSTALL GASTONIA ELECTRIC AERIAL SPLICE ENCLOSURE
- 76 INSTALL GASTONIA ELECTRIC UNDERGROUND SPLICE ENCLOSURE

- 77 INSTALL GASTONIA ELECTRIC UNDERGROUND SPLICE ENCLOSURE

ALL NCDOT ATTACHMENT POINTS ARE 40" BELOW POWER, FRONT SIDE OF POLE, UNLESS OTHERWISE NOTED.

PLANS PREPARED IN THE OFFICE OF:  
  
 Kimley-Horn and Associates, Inc.  
 P.O. Box 33068  
 Raleigh N.C. 27636-3068  
 (919) 677-2000

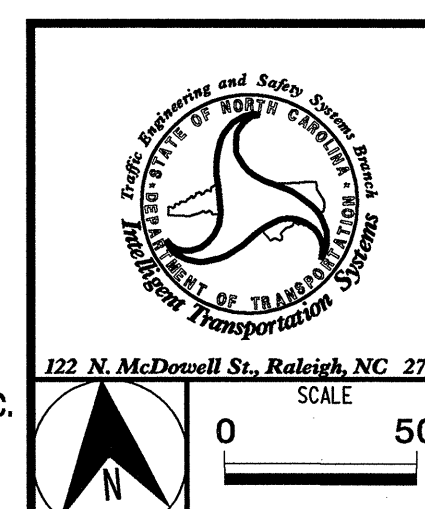

**CITY OF GASTONIA COMPUTERIZED SIGNAL SYSTEM UPGRADE CABLE ROUTING PLANS**

DIVISION 12 GASTON COUNTY

PLAN DATE: MAY 26, 2005 REVIEWED BY: I.Z. VANOSDELL

PREPARED BY: J.C. CROSS REVIEWED BY: M.W. DUNZO

REVISIONS	INIT.	DATE

SEAL

SIGNATURE: *[Signature]* DATE: 5/27/05

CADD Filename: ...sh+075.dgn

05/26/2005 F:\systems\proj\036097\gastonia\sh075.dgn