


EDI MODEL 2010ECL CONFLICT MONITOR


PROGRAMMING DETAIL

WD ENABLE




(remove jumpers and set switches as shown)

REMOVE DIODE JUMPERS 1-5, 1-6, 2-5, 2-6, 3-7, 3-8, 4-7 AND 4-8.

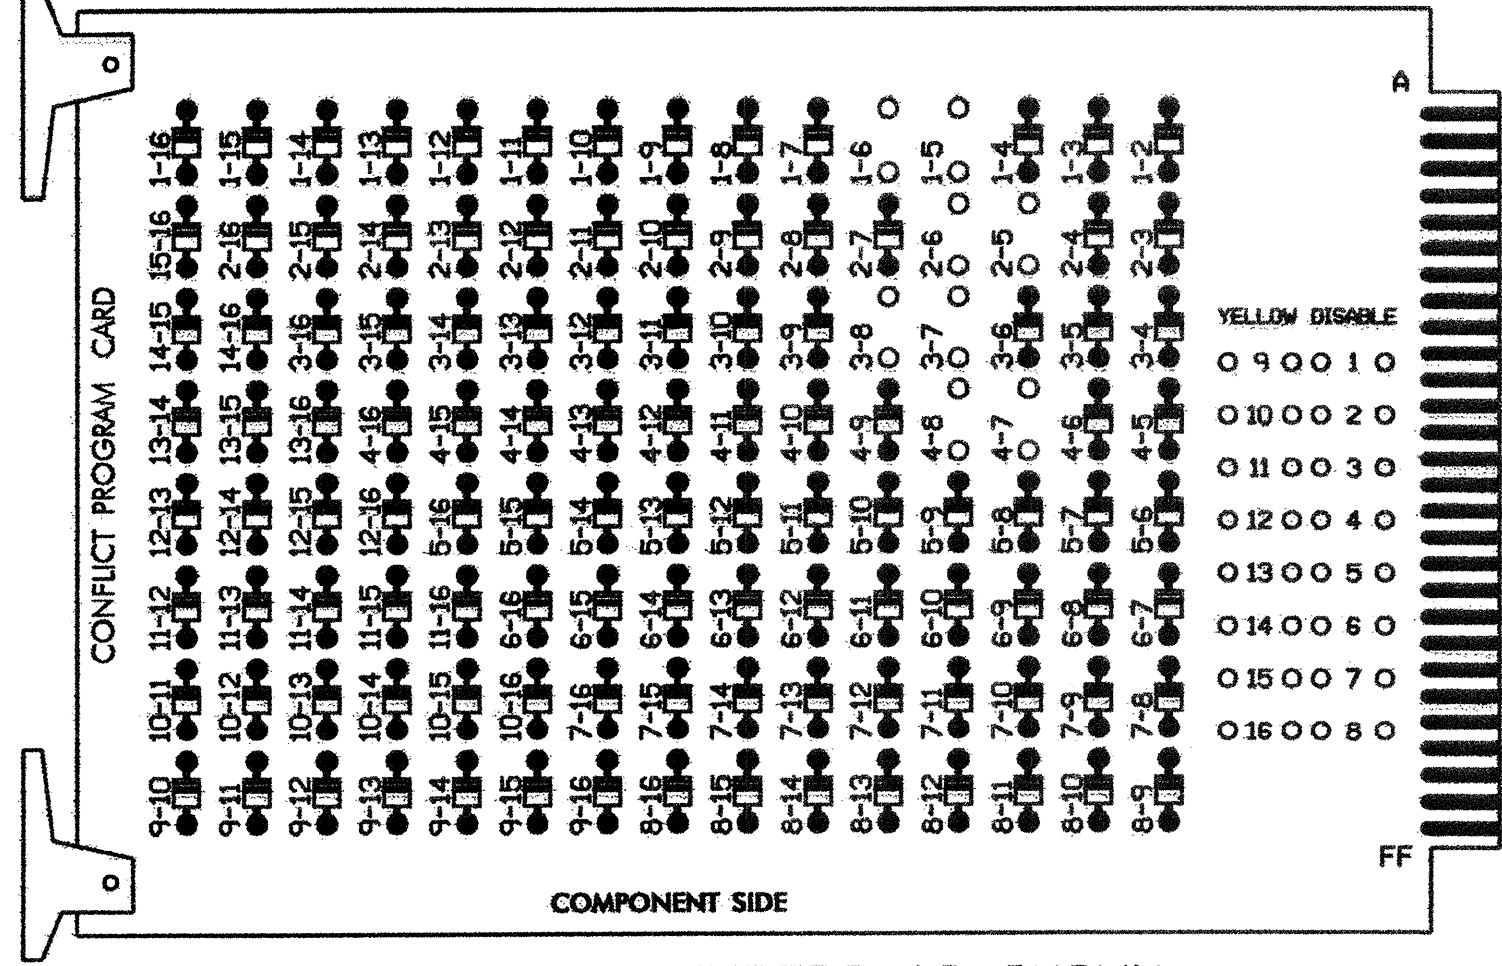

REMOVE JUMPERS AS SHOWN

OPTIONS

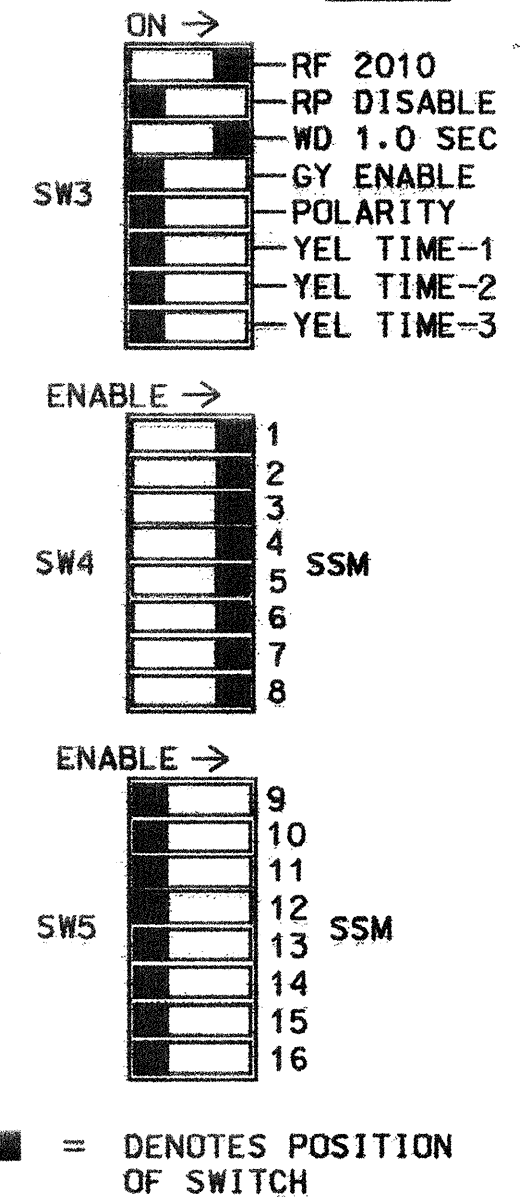

NOTES:

- CARD IS PROVIDED WITH ALL DIODE JUMPERS IN PLACE. REMOVAL OF ANY JUMPER ALLOWS ITS CHANNELS TO RUN CONCURRENTLY.
- MAKE SURE JUMPERS SEL1-SEL5 ARE PRESENT ON THE MONITOR BOARD.

NOTES

- TO PREVENT "FLASH-CONFLICT" PROBLEMS, INSERT RED FLASH PROGRAM BLOCKS FOR ALL UNUSED VEHICLE LOAD SWITCHES IN THE OUTPUT FILE. THE INSTALLER SHALL VERIFY THAT SIGNAL HEADS FLASH IN ACCORDANCE WITH THE SIGNAL PLANS.
- ENSURE THAT RED ENABLE IS ACTIVE AT ALL TIMES DURING NORMAL OPERATION. TO PREVENT RED FAILURES ON UNUSED MONITOR CHANNELS, TIE UNUSED RED MONITOR INPUTS 9,10, 11,12,13,14,15 & 16 TO LOAD SWITCH AC+ PER THE CABINET MANUFACTURER'S INSTRUCTIONS.
- PROGRAM CONTROLLER TO START UP IN PHASES 2 AND 6 GREEN.
- ENABLE SIMULTANEOUS GAP-OUT FEATURE, ON CONTROLLER UNIT, FOR ALL PHASES.
- THE CABINET AND CONTROLLER ARE PART OF THE GASTONIA CITY SYSTEM.

EQUIPMENT INFORMATION

CONTROLLER.....CONTRACTOR SUPPLIED 2070L
 CABINETCONTRACTOR SUPPLIED 332
 SOFTWAREECONOLITE OASIS
 CABINET MOUNT.....BASE
 OUTPUT FILE POSITIONS...12
 LOAD SWITCHES USED.....S1,S2,S3,S4,S5,S6,S7,S8
 PHASES USED.....1,2,3,4,5,6,7,8
 OVERLAPS.....NONE


FIELD CONNECTION HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S2P	S3	S4	S4P	S5	S6	S6P	S7	S8	S8P		
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED		
SIGNAL HEAD NO.	11	21,22	NU	22	31	41,42	NU	42	51	61,62	NU	71	81,82	NU
GREEN		130			103				136		109			
YELLOW		129			102				135		108			
RED		128			101				134		107			
RED ARROW	125			116				131		122				
YELLOW ARROW	126			117	117			132	132		123			
GREEN ARROW	127			118	118			133	133		124			

NU = NOT USED

INPUT FILE POSITION LAYOUT

(front view)

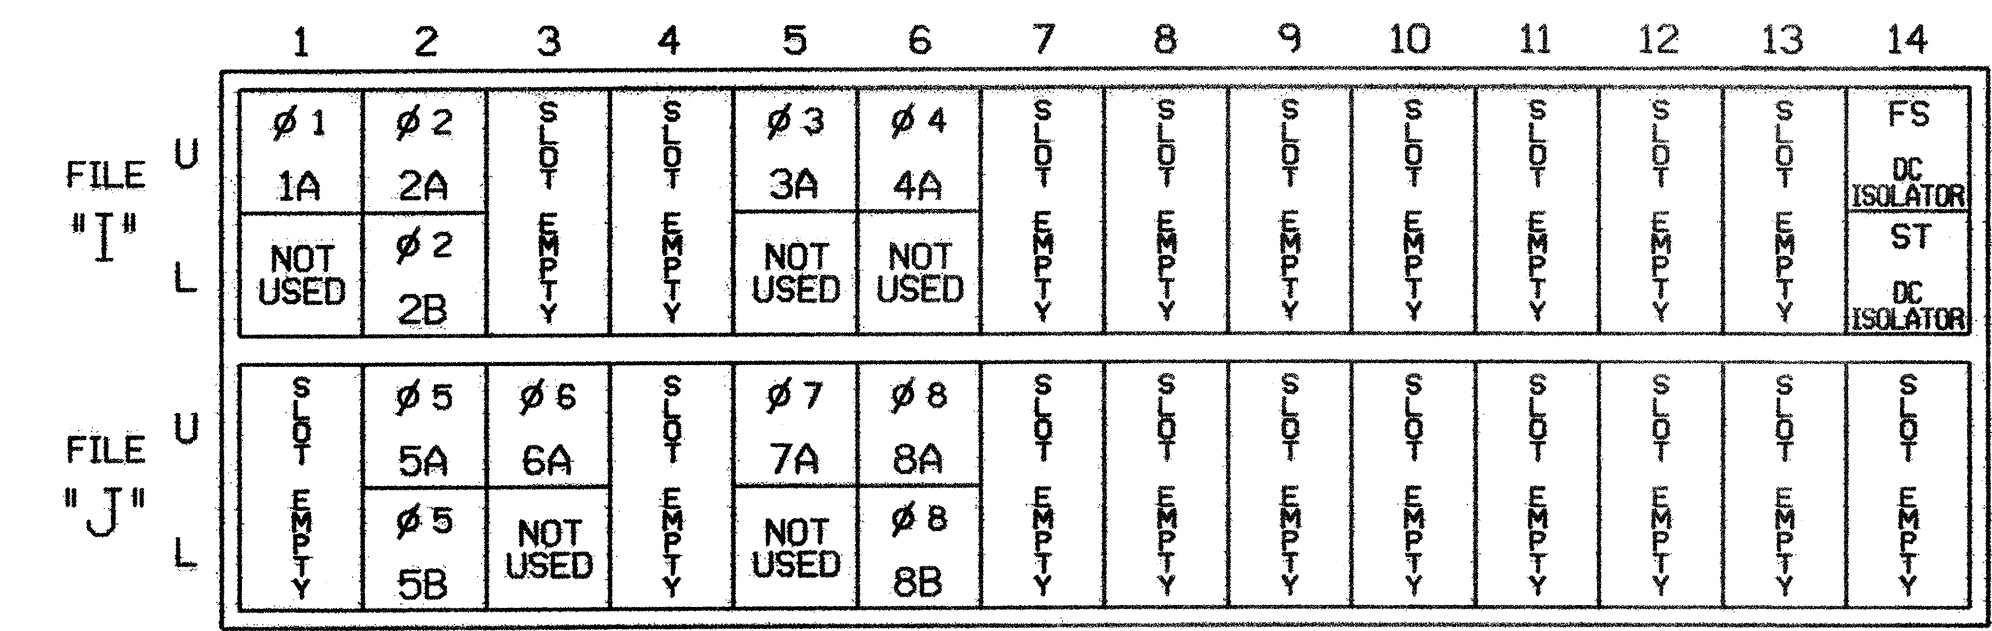


EX. : 1A, 2A, ETC. = LOOP NO.'S

FS = FLASH SENSE
 ST = STOP TIME

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT ASSIGNMENT NO.	DETECTOR NO.	NEMA PHASE	CALL	EXTEND	FULL TIME DELAY	STRETCH TIME	DELAY TIME
1A	TB2-1,2	I1U	56	18	1	1	Y	Y			3
2A	TB2-5,6	I2U	39	1	2	2	Y	Y			
2B	TB2-7,8	I2L	43	5	12	2	Y	Y			
3A	TB4-5,6	I5U	58	20	3	3	Y	Y			3
4A	TB4-9,10	I6U	41	3	4	4	Y	Y			
5A	TB3-5,6	J2U	40	2	6	5	Y	Y			3
5B	TB3-7,8	J2L	44	6	16	5	Y	Y			15
6A	TB3-9,10	J3U	64	26	36	6	Y	Y			
7A	TB5-5,6	J5U	57	19	7	7	Y	Y			3
8A	TB5-9,10	J6U	42	4	8	8	Y	Y			
8B	TB5-11,12	J6L	46	8	18	8	Y	Y			10

INPUT FILE POSITION LEGEND: J2L

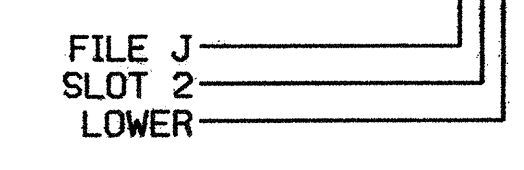

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 12-0079
 DESIGNED: NOVEMBER 2004
 SEALED: 12/2/04
 REVISED:

SIGNAL UPGRADE

ELECTRICAL AND PROGRAMMING DETAILS FOR:

222 N. McDowell St., Raleigh, NC 27603

NC 279 (S NEW HOPE ROAD)
 AT
 SR 2466 (GARRISON BLVD EAST/
 ARMSTRONG PARK DR)

DIVISION 12 GASTON COUNTY GASTONIA

PLAN DATE: NOVEMBER 2004 REVIEWED BY: R. HINSHAW

PREPARED BY: WILLIAM HAIRSTON REVIEWED BY:

REVISIONS	INIT.	DATE

SEAL

George C. Brown
 ENGINEER
 DATE

SIG. INVENTORY NO. 12-0079