


**Project Special Provisions
Structures**

Table of Contents

	Page
	#
Calcium Nitrite Corrosion Inhibitor (2-14-04)	1
Mechanical Butt Splicing For Reinforcing Steel (10-12-01)	2
Adhesively Anchored Anchor Bolts or Dowels (10-12-01)	3
Epoxy Protective Coating (10-12-01)	6
Falsework and Formwork (10-12-01)	8
Submittal of Working Drawings (6-7-05)	14
Elastomeric Bearings (10-03-02)	20
Unclassified Structure Excavation at Station 15+69.00 -L-, 18+34.00 -L-, 22+85.00 -L- (12-12-02)	20
Prestressed Concrete Members (3-04-05)	20
Prestressed Concrete Piles (8-13-04)	21
Crane Safety (08-15-05)	21
Pile Driving Analyzer (6-7-05)	22
Removal of Existing Structure at Station 15+69.00 -L- (SPECIAL)	26
Precast Concrete "L" Barrier (SPECIAL)	27

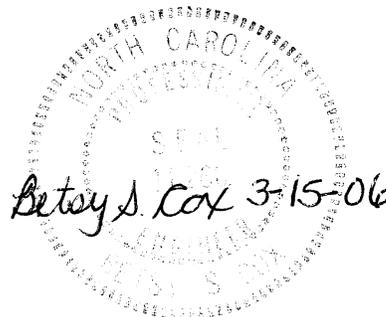

PROJECT SPECIAL PROVISIONS
STRUCTURES**PROJECT B-3348 & B-3349****HYDE COUNTY****CALCIUM NITRITE CORROSION INHIBITOR****(2-14-04)**

Add an approved calcium nitrite corrosion inhibitor (30% solids) to the concrete mix at the batch plant for the members identified by the plan notes. Clearly mark the prestressed concrete members that contain calcium nitrite.

Use the inhibitor at a minimum rate of 3.0 gal/yd³ (14.9 liters/m³). Ensure that the hardened concrete contains at least 5.1 lbs/yd³ (3.0 kg/m³) Nitrite (NO₂) when tested in accordance with N.C. Department of Transportation, Materials and Tests Method Chem. C-20.0 with the exception of concrete used in prestressed members. Test prestressed members as follows:

The Inspector will perform the complete C-21.0 "Field Test Procedure for the Nitrite Ion in Plastic Concrete" on plastic concrete samples obtained randomly from a truck used to pour concrete near each end (live end and dead end) of a prestressed concrete casting. Powder samples will be taken from hardened cylinders made at the time C-21.0 is run for any concrete that fails the C-21.0 (plastic test) method. The Chemical Testing Laboratory will test the powder using method C-20.0 "Determination of Nitrite in Hardened Concrete." Acceptance of the concrete is dependent in the results of method C-20.0 (hardened test) when any sample fails the C-21.0 (plastic test method).

The Inspector will perform a qualitative nitrite ion check by method C-22.0 (Field Spot Test) on each load of concrete batched for a prestressed concrete casting bed. Acceptance of the concrete is dependent on the results of method C-20.0 (hardened test) when any sample fails the C-22.0 (Field Spot Test). The producer may elect to not incorporate concrete that fails Method C-22.0 (Field Spot Test) in lieu of waiting for C-20.0 (hardened test) test results to determine the acceptability of the member. Once per each week's production of prestressed concrete with corrosion inhibitor, random samples of hardened concrete powder will be taken from cylinders used for method C-21.0 (plastic test). These samples will be submitted to the Chemical Testing Laboratory for analysis using method C-20.0 (hardened test).

Units with calcium nitrite in a quantity less than specified are subject to rejection.

Furnish concrete cylinders to the Engineer, in a quantity to be specified, to verify the concentrations of calcium nitrite in hardened concrete. Concrete failing to contain calcium nitrite at the required concentrations as tested is subject to rejection.

Use only air-entraining, water-reducing, and/or set-controlling admixtures in the production of concrete mixtures that are compatible with calcium nitrite solutions.

Strictly adhere to the manufacturer's written recommendations regarding the use of admixtures including storage, transportation and method of mixing. If preferred, use calcium nitrite, which acts as an accelerator, in conjunction with a retarder to control the set of concrete, as per the manufacturer's recommendation.

No separate payment will be made for furnishing and incorporating the calcium nitrite solution into the concrete mixture. The cost of furnishing and incorporating the admixture is considered a part of the work of fabricating and furnishing the prestressed concrete units or supplying Class AA concrete.

MECHANICAL BUTT SPLICING FOR REINFORCING STEEL

(10-12-01)

1.0 GENERAL

When mechanically butt splicing reinforcing steel, use a standard metal filled sleeve, cement mortar filled sleeve, threaded steel couplings, forged steel sleeve, cold-forged sleeve or an exothermic process whereby molten filler metal, contained by a high strength steel sleeve of larger inside diameter than the bars, is introduced into the annular space between the bars and the sleeve and also between the ends of the bars. Provide a splice that is capable of transferring at least 125% of the yield strength of the bars from one bar to the other by the mechanical strengths of the splice components.

The following is a list of approved connectors:

Brand Name	Approved Size
Bar-Lock Couplers	#4 - #11 (#13 - #36)
Barsplice Products	
Bar-Grip System	#4 - #18 (#13 - #57)
Grip-Twist System	#4 - #18 (#13 - #57)
Threaded Dowel Bar Coupler	#4 - #8 (#13 - #25)
Erico	
Lenton Interlok Grout-Filled Coupler	#6 - #11 (#19 - #36)
Lenton Position Coupler	#4 - #18 (#13 - #57)
Lenton Standard Coupler	#4 - #18 (#13 - #57)
Quick-Wedge Coupler	#4 - #6 (#13 - #19)
Richmond DB-SAE Dowel Bar Splicer	#4 - #11 (#13 - #36)
Williams Form Engineering Flange Coupler	#4 - #14 (#13 - #43)
Zap Screwlok	#4 - #11 (#13 - #36)

For splices not on the approved list, as a condition of approval, assemble three test splices in the presence of the Engineer for each of the bar materials identical to that which is proposed for use in the structure and forward the test splices to N. C. Department of Transportation Materials and Tests Unit in Raleigh, N.C.

When an exothermic connector is used, do not let the splice depend upon fusion of the filler metal with the bars. Select a temperature for heating the bars that is below the melting point of the bars and is sufficiently low so as not to significantly affect the original hardness nor decrease the structural properties of the bars. Visual inspection of the finished splices is sufficient; the splice is acceptable if sound filler metal is present at both ends of the splice sleeve and at the sleeve entry port.

Splice the bars in accordance with the manufacturer's recommendations using the manufacturer's required accessories as approved by the Engineer. Use mechanical butt splices only where specified on the plans. Any additional splices require approval.

If bars are epoxy coated, strip the epoxy coating within the limits of the sleeve prior to splicing. After making the splice, paint any unprotected areas of the reinforcing bar and the coupling sleeve with epoxy paint as described in the Standard Specifications.

2.0 BASIS OF PAYMENT

No separate measurement or payment will be made for this work. The following pay items will be full compensation for the above work as follows:

- The unit contract price bid for "Reinforced Concrete Deck Slab" will be full compensation for mechanical butt splices in concrete decks.
- The unit contract price bid for "Reinforcing Steel" or "Epoxy Coated Reinforcing Steel" will be full compensation for mechanical butt splices in bridge substructures and cast-in-place culverts.

ADHESIVELY ANCHORED ANCHOR BOLTS OR DOWELS

(10-12-01)

1.0 DESCRIPTION

The work covered by this Special Provision consists of furnishing all necessary labor, equipment, and materials and performing all operations necessary for installing anchor bolts/dowels in concrete using an adhesive bonding system in accordance with the details shown on the plans and with the requirements of this specification unless otherwise directed.

Submit a description of the proposed adhesive bonding system to the Engineer for review, comments and acceptance. Include in the description the bolt type and its deformations, equipment, manufacturer's recommended hole diameter, embedment depth, material specifications, and any other material, equipment or procedure not covered by the plans or these specifications. List the properties of the adhesive, including density, minimum and

maximum temperature application, setting time, shelf life, pot life, shear strength and compressive strength. If bars/dowels containing a corrosion protective coating are required, provide an adhesive that does not contain any chemical elements that are detrimental to the coating and include a statement to this effect in the submittal.

2.0 MATERIALS

Use an adhesive bonding system that has been tested for a tensile strength of 125% of the specified anchor bolt/dowel yield load. Provide certification that, for the particular bolt grade, diameter and embedment depth required, the anchor system will not fail by adhesive failure and that the anchor bolt/dowel will not move. The minimum concrete compressive strength is 3000 psi (20.7 MPa) for certification and anchorage selection.

Package components of the adhesive so that one whole container of each component mixes to form one batch of adhesive. Use containers designed so that all of the contents may be removed easily and sealed tightly to prevent leakage. Furnish adhesive material requiring hand mixing in two separate containers designated as Component A and Component B. Provide a self contained cartridge or capsule consisting of two components which are automatically mixed as they are dispensed, as in the case of a cartridge, or drilled into, as in the case of a capsule.

Clearly label each container with the manufacturer's name, date of manufacture, batch number, batch expiration date, direction for use, and warnings and precautions concerning the contents as required by State or Federal Laws and Regulations.

3.0 PROCEDURE

A. Drilling of Holes into Concrete

When directed, use a jig or fixture to ensure the holes are positioned and aligned correctly during the drilling process. Upon approval, adjusting hole locations to avoid reinforcing steel is permitted.

Drill the holes with a pneumatic drill unless another drilling method is approved. Follow the manufacturer's recommendations regarding the diameter of the drilled hole.

Immediately after completion of drilling, blow all dust and debris out of the holes with oil-free compressed air using a wand extending to the bottom of the hole. Remove all dust from the sides of the holes by brushing the holes with a stiff-bristled brush of a sufficient size and then blow the hole free of dust. Repeat this procedure until the hole is completely clean. Check each hole with a depth gauge to ensure proper embedment depth.

Repair spalled or otherwise damaged concrete using approved methods.

B. Inspection of Holes

Inspect each hole immediately prior to placing the adhesive and the anchor bolts/dowels. Ensure all holes are dry and free of dust, dirt, oil, and grease. Rework any hole that does not meet the requirements of this Special Provision.

C. Mixing of Adhesive

Mix the adhesive in strict conformance with the manufacturer's instructions.

D. Embedment of Anchor Bolt/Dowel

Clean each anchor bolt/dowel so that it is free of all rust, grease, oil, and other contaminants.

Unless otherwise shown on the plans, the minimum anchor bolt/dowel embedment depth is such that the adhesive develops at least 125% of the anchor bolt/dowel yield load as determined by the manufacturer.

Insert the anchor bolt/dowel the specified depth into the hole and slightly agitate it to ensure wetting and complete encapsulation. After insertion of the anchor bolt/dowel, strike off any excessive adhesive flush with the concrete face. Should the adhesive fail to fill the hole, add additional adhesive to the hole to allow a flush strike-off.

Do not disturb the anchor bolts/dowels while adhesive is hardening.

4.0 FIELD TESTING

When specified on the plans, test the installed anchor bolts/dowels for adequate adhesive as specified below. Inform the Engineer when the tests will be performed at least 2 days prior to testing. Conduct the tests in the presence of the Engineer.

Use a calibrated hydraulic centerhole jack system for testing. Place the jack on a plate washer that has a hole at least 1/8 inch (3 mm) larger than the hole drilled into the concrete. Position the plate washer on center to allow an unobstructed pull. Position the anchor bolts/dowels and the jack on the same axis. Have an approved testing agency calibrate the jack within 6 months prior to testing. Supply the Engineer with a certificate of calibration.

In the presence of the Engineer, field test 10% of the first 50 anchor bolts/dowels prior to installing any additional anchors. For testing, apply and hold briefly 90% of the anchor bolt/dowel yield load shown on the plans. No visible signs of movement of the anchor bolts/dowels is permitted under this load. Upon receiving satisfactory results from these tests, install the remaining anchors. Test a minimum of 2% of the remaining anchors as previously described.

Record data for each anchor bolt/dowel tested on the report form entitled "Installation Test Report of Adhesively Anchored Anchor Bolts or Dowels". Obtain this form from the North Carolina Department of Transportation Materials and Tests Engineer. Submit a copy of the completed report forms to the Engineer.

Final acceptance of the adhesively anchored system is based on the conformance of the pull test to the requirements of this specification. Failure to meet the criteria of this specification is grounds for rejection.

5.0 BASIS OF PAYMENT

No separate measurement or payment will be made for furnishing, installing, and testing anchor bolts/dowels.

Payment at the contract unit prices for the various pay items will be full compensation for all materials, equipment, tools, labor, and incidentals necessary to complete the above work.

EPOXY PROTECTIVE COATING

(10-12-01)

1.0 DESCRIPTION

This work consists of preparing the concrete surface and furnishing and applying an epoxy protective coating to the surfaces described in this Special Provision. When epoxy protective coating is required, cure the top surfaces of the bent or end bent caps in accordance with the Standard Specifications, but do not use the Membrane Curing Compound method.

2.0 MATERIALS

Use an epoxy coating that meets the most recently published NCDOT Specification on the date of advertisement. Use the epoxy coating that meets NCDOT-Type 4A Flexible, epoxy coating, moisture insensitive.

Provide a certification for the proposed epoxy showing that it meets NCDOT-Type 4A.

The following companies have epoxies that meet Type 4A Specifications:

- E-Bond Epoxy, Inc.
Fort Lauderdale, Florida 33307
- Permagile Industries
Plainview, NY 11803
- Poly-Carb
Cleveland, OH 44139

- Tamms, Inc.
Mentor, OH 44060
- Adhesive Engineering
Cleveland, OH 44122-5554
- Kaufman Products
Baltimore, MD 21226-1131
- Prime Resins
Lithonia, GA 30058
- Sika Corporation
Lyndhurst, N. J. 07071

A copy of the specifications for Epoxy Resin Systems is available from the Materials and Tests Unit.

3.0 SURFACES

With the exception of cored slab bridges, apply the epoxy protective coating to the top surface area, including chamfer area, of bent caps under expansion joints and of end bent caps, excluding areas under elastomeric bearings. For cored slab bridges, do not apply the epoxy protective coating to the bent or end bent caps. Also, apply epoxy protective coating to the ends of prestressed concrete members as noted on the plans.

Use extreme care to keep the area under the elastomeric bearings free of the epoxy protective coating. Do not apply the epoxy protective coating in the notch at the ends of the prestressed concrete girders.

Thoroughly clean all dust, dirt, grease, oil, laitance, and other objectionable material from the concrete surfaces to be coated. Air-blast all surfaces immediately prior to applying the protective coating.

Only use cleaning agents pre-approved by the Engineer.

4.0 APPLICATION

Apply epoxy protective coating only when the air temperature is at least 40°F (4°C) and rising, but less than 95°F (35°C) and the surface temperature of the area to be coated is at least 40°F (4°C). Remove any excess or free standing water from the surfaces before applying the coating. Apply one coat of epoxy protective coating at a rate such that it covers between 100 and 200 ft²/gal (2.5 and 5 m²/liter).

Note: Under certain combinations of circumstances, the cured epoxy protective coating may develop “oily” condition on the surface due to amine blush. This condition is not detrimental to the applied system.

Apply the coating so that the entire designated surface of the concrete is covered and all pores filled. To provide a uniform appearance, use the exact same material on all visible surfaces.

5.0 BASIS OF PAYMENT

No separate measurement or payment will be made for preparing, furnishing and applying the epoxy protective coating to the concrete surfaces.

Payment at the contract unit prices for the various pay items will be full compensation for the above work including all materials, equipment, tools, labor, and incidentals necessary to complete the work.

FALSEWORK AND FORMWORK

(10-12-01)

1.0 DESCRIPTION

Use this Special Provision as a guide to develop temporary works submittals required by the Standard Specifications or other provisions; no additional submittals are required herein. Such temporary works include, but are not limited to, falsework and formwork.

Falsework is any temporary construction used to support the permanent structure until it becomes self-supporting. Formwork is the temporary structure or mold used to retain plastic or fluid concrete in its designated shape until it hardens. Access scaffolding is a temporary structure that functions as a work platform that supports construction personnel, materials, and tools, but is not intended to support the structure. Scaffolding systems that are used to temporarily support permanent structures (as opposed to functioning as work platforms) are considered to be falsework under the definitions given. Shoring is a component of falsework such as horizontal, vertical, or inclined support members. Where the term “temporary works” is used, it includes all of the temporary facilities used in bridge construction that do not become part of the permanent structure.

Design and construct safe and adequate temporary works that will support all loads imposed and provide the necessary rigidity to achieve the lines and grades shown on the plans in the final structure.

2.0 MATERIALS

Select materials suitable for temporary works; however, select materials that also ensure the safety and quality required by the design assumptions. The Engineer has authority to reject material on the basis of its condition, inappropriate use, safety, or nonconformance with the plans. Clearly identify allowable loads or stresses for all materials or manufactured devices on the plans. Revise the plan and notify the Engineer if any change to materials or material strengths is required.

3.0 DESIGN REQUIREMENTS

A. Working Drawings

Provide working drawings for items as specified in the contract, or as required by the Engineer, with design calculations and supporting data in sufficient detail to permit a structural and safety review of the proposed design of the temporary work.

When concrete placement is involved, include data such as the drawings of proposed sequence, rate of placement, direction of placement, and location of all construction joints. Submit the number of copies as called for by the contract.

When required, have the drawings and calculations prepared under the guidance of, and sealed by, a North Carolina Registered Professional Engineer who is knowledgeable in temporary works design.

Design falsework and formwork requiring submittals in accordance with the 1995 AASHTO *Guide Design Specifications for Bridge Temporary Works* except as noted herein.

1. Wind Loads

Table 2.2 of Article 2.2.5.1 is modified to include wind velocities up to 110 mph (177 km/hr). In addition, Table 2.2A is included to provide the maximum wind speeds by county in North Carolina.

Table 2.2 - Wind Pressure Values

Height Zone feet (m) above ground	Pressure, lb/ft ² (kPa) for Indicated Wind Velocity, mph (km/hr)				
	70 (112.7)	80 (128.7)	90 (144.8)	100 (160.9)	110 (177.0)
0 to 30 (0 to 9.1)	15 (0.72)	20 (0.96)	25 (1.20)	30 (1.44)	35 (1.68)
30 to 50 (9.1 to 15.2)	20 (0.96)	25 (1.20)	30 (1.44)	35 (1.68)	40 (1.92)
50 to 100 (15.2 to 30.5)	25 (1.20)	30 (1.44)	35 (1.68)	40 (1.92)	45 (2.15)
over 100 (30.5)	30 (1.44)	35 (1.68)	40 (1.92)	45 (2.15)	50 (2.39)

2. Time of Removal

The following requirements replace those of Article 3.4.8.2.

Do not remove forms until the concrete has attained strengths required in Article 420-17 of the Standard Specifications and these Special Provisions.

Do not remove forms until the concrete has sufficient strength to prevent damage to the surface.

Table 2.2A - Steady State Maximum Wind Speeds by Counties in North Carolina

COUNTY	25 YR (mph) (km/hr)	COUNTY	25 YR (mph) (km/hr)	COUNTY	25 YR (mph) (km/hr)
Alamance	70 (112.7)	Franklin	70 (112.7)	Pamlico	100 (160.9)
Alexander	70 (112.7)	Gaston	70 (112.7)	Pasquotank	100 (160.9)
Alleghany	70 (112.7)	Gates	90 (144.8)	Pender	100 (160.9)
Anson	70 (112.7)	Graham	80 (128.7)	Perquimans	100 (160.9)
Ashe	70 (112.7)	Granville	70 (112.7)	Person	70 (112.7)
Avery	70 (112.7)	Greene	80 (128.7)	Pitt	90 (144.8)
Beaufort	100 (160.9)	Guilford	70 (112.7)	Polk	80 (128.7)
Bertie	90 (144.8)	Halifax	80 (128.7)	Randolph	70 (112.7)
Bladen	90 (144.8)	Harnett	70 (112.7)	Richmond	70 (112.7)
Brunswick	100 (160.9)	Haywood	80 (128.7)	Robeson	80 (128.7)
Buncombe	80 (128.7)	Henderson	80 (128.7)	Rockingham	70 (112.7)
Burke	70 (112.7)	Hertford	90 (144.8)	Rowan	70 (112.7)
Cabarrus	70 (112.7)	Hoke	70 (112.7)	Rutherford	70 (112.7)
Caldwell	70 (112.7)	Hyde	110 (177.0)	Sampson	90 (144.8)
Camden	100 (160.9)	Iredell	70 (112.7)	Scotland	70 (112.7)
Carteret	110 (177.0)	Jackson	80 (128.7)	Stanley	70 (112.7)
Caswell	70 (112.7)	Johnston	80 (128.7)	Stokes	70 (112.7)
Catawba	70 (112.7)	Jones	100 (160.9)	Surry	70 (112.7)
Cherokee	80 (128.7)	Lee	70 (112.7)	Swain	80 (128.7)
Chatham	70 (112.7)	Lenoir	90 (144.8)	Transylvania	80 (128.7)
Chowan	90 (144.8)	Lincoln	70 (112.7)	Tyrell	100 (160.9)
Clay	80 (128.7)	Macon	80 (128.7)	Union	70 (112.7)
Cleveland	70 (112.7)	Madison	80 (128.7)	Vance	70 (112.7)
Columbus	90 (144.8)	Martin	90 (144.8)	Wake	70 (112.7)
Craven	100 (160.9)	McDowell	70 (112.7)	Warren	70 (112.7)
Cumberland	80 (128.7)	Mecklenburg	70 (112.7)	Washington	100 (160.9)
Currituck	100 (160.9)	Mitchell	70 (112.7)	Watauga	70 (112.7)
Dare	110 (177.0)	Montgomery	70 (112.7)	Wayne	80 (128.7)
Davidson	70 (112.7)	Moore	70 (112.7)	Wilkes	70 (112.7)
Davie	70 (112.7)	Nash	80 (128.7)	Wilson	80 (128.7)
Duplin	90 (144.8)	New Hanover	100 (160.9)	Yadkin	70 (112.7)
Durham	70 (112.7)	Northampton	80 (128.7)	Yancey	70 (112.7)
Edgecombe	80 (128.7)	Onslow	100 (160.9)		
Forsyth	70 (112.7)	Orange	70 (112.7)		

Note on the working drawings any anchorages, connectors, inserts, steel sleeves or other such devices used as part of the falsework or formwork that remains in the permanent structure. If the plan notes indicate that the structure contains the necessary corrosion protection required for a Corrosive Site, epoxy coat, galvanize, metallize or otherwise protect these devices as directed by the Engineer. Any coating required by the Engineer will be considered incidental to the various pay items requiring temporary works.

B. Review and Approval

The Engineer is responsible for the review and approval of temporary works' drawings.

Submit the working drawings sufficiently in advance of proposed use to allow for their review, revision (if needed), and approval without delay to the work.

Do not start construction of any temporary work for which working drawings are required until the drawings have been approved. Such approval does not relieve the Contractor of the responsibility for the accuracy and adequacy of the working drawings.

The time period for review of the working drawings does not begin until complete drawings and design calculations, when required, are received by the Engineer.

On the drawings, show all information necessary to allow the design of any component to be checked independently as determined by the Engineer.

If requested by the Engineer, submit with the working drawings manufacturer's catalog data listing the weight of all construction equipment that will be supported on the temporary work. Show anticipated total settlements and/or deflections of falsework and forms on the working drawings. Include falsework footing settlements, joint take-up, and deflection of beams or girders. Design the falsework and forms supporting deck slabs and overhangs on girder bridges so that there will be no differential settlement between the girders and the deck forms during placement of deck concrete.

4.0 CONSTRUCTION REQUIREMENTS

All requirements of Section 420 of the Standard Specifications apply.

Construct temporary works in conformance with the approved working drawings. Ensure that the quality of materials and workmanship employed is consistent with that assumed in the design of the temporary works. Do not weld falsework members to any portion of the permanent structure unless approved. Show any welding to the permanent structure on the approved construction drawings.

Provide tell-tales attached to the forms and extending to the ground, or other means, for accurate measurement of falsework settlement. Make sure that the anticipated compressive settlement and/or deflection of falsework does not exceed 1 inch (25 mm). For cast-in-place concrete structures, make sure that the calculated deflection of falsework

flexural members does not exceed $1/240$ of their span regardless of whether or not the deflection is compensated by camber strips.

A. Maintenance and Inspection

Inspect and maintain the temporary work in an acceptable condition throughout the period of its use. Certify that the manufactured devices have been maintained in a condition to allow them to safely carry their rated loads. Clearly mark each piece so that its capacity can be readily determined at the job site.

Perform an in-depth inspection of an applicable portion(s) of the temporary works, in the presence of the Engineer, not more than 24 hours prior to the beginning of each concrete placement. Inspect other temporary works at least once a month to ensure that they are functioning properly. Have a North Carolina Registered Professional Engineer inspect the cofferdams, shoring, sheathing, support of excavation structures, and support systems for load tests prior to loading.

B. Foundations

Determine the safe bearing capacity of the foundation material on which the supports for temporary works rest. If required by the Engineer, conduct load tests to verify proposed bearing capacity values that are marginal or in other high-risk situations.

The use of the foundation support values shown on the contract plans of the permanent structure is permitted if the foundations are on the same level and on the same soil as those of the permanent structure.

Allow for adequate site drainage or soil protection to prevent soil saturation and washout of the soil supporting the temporary works supports.

If piles are used, the estimation of capacities and later confirmation during construction using standard procedures based on the driving characteristics of the pile is permitted. If preferred, use load tests to confirm the estimated capacities; or, if required by the Engineer conduct load tests to verify bearing capacity values that are marginal or in other high risk situations.

The Engineer reviews and approves the proposed pile and soil bearing capacities.

5.0 REMOVAL

Unless otherwise permitted, remove and keep all temporary works upon completion of the work. Do not disturb or otherwise damage the finished work.

Remove temporary works in conformance with the contract documents. Remove them in such a manner as to permit the structure to uniformly and gradually take the stresses due to its own weight.

6.0 METHOD OF MEASUREMENT

Unless otherwise specified, temporary works will not be directly measured.

7.0 BASIS OF PAYMENT

Payment at the contract unit prices for the various pay items requiring temporary works will be full compensation for the above falsework and formwork.

SUBMITTAL OF WORKING DRAWINGS**6-7-05****1.0 GENERAL**

Submit working drawings in accordance with Article 105-2 of the Standard Specifications and the requirements of this Special Provision. The list of submittals contained herein does not represent a list of required submittals for this project. Submittals are only necessary for those items as required by the Standard Specifications, other Special Provisions, or contract plans. Make submittals that are not specifically noted in this Special Provision directly to the Resident Engineer.

If submittals contain variations from plan details or specifications, significantly affect project cost, or significantly affect field construction or operations, discuss them with, and submit them through, the Resident Engineer. State the reason for the proposed variation in the submittals. To minimize overall review time, make sure all working drawing submittals are complete when first submitted. Provide a contact name and phone number with each submittal. Direct any questions regarding working drawing submittal requirements to the Resident Engineer, Structure Design Unit contacts or the Geotechnical Engineering Unit contacts noted below.

In order to facilitate in-plant inspection by NCDOT and approval of working drawings, the Contractor shall provide the name, address, and telephone number of the facility where fabrication will actually be done, if different than shown on the title block of the submitted working drawings. This includes, but is not limited to, precast concrete items, prestressed concrete items, and fabricated steel or aluminum items.

2.0 WORKING DRAWINGS SUBMITTAL CONTACTS

All submittals noted herein are reviewed by the Structure Design Unit and/or the Geotechnical Engineering Unit.

For submittals to the Structure Design Unit, use the following addresses:

Via US mail:

Mr. G. R. Perfetti, P. E.
State Bridge Design Engineer
North Carolina Department
of Transportation
Structure Design Unit
1581 Mail Service Center
Raleigh, NC 27699-1581

Attention: Mr. P. D. Lambert, P. E.

Via other delivery service:

Mr. G. R. Perfetti, P. E.
State Bridge Design Engineer
North Carolina Department
of Transportation
Structure Design Unit
1000 Birch Ridge Drive
Raleigh, NC 27610

Attention: Mr. P. D. Lambert, P. E.

For submittals to the Geotechnical Engineering Unit, use the following addresses:

For projects in Divisions 1-7, use the following Eastern Regional Office address:

Via US mail:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
1570 Mail Service Center
Raleigh, NC 27699-1570

Via other delivery service:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
3301 Jones Sausage Road, Suite 100
Garner, NC 27529

For projects in Divisions 8-14, use the following Western Regional Office address:

Via US mail:

Mr. John Pilipchuk, L. G., P. E.
Western Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
5253 Z Max Boulevard
Harrisburg, NC 28075

Via other delivery service:

Mr. John Pilipchuk, L. G., P. E.
Western Region Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
5253 Z Max Boulevard
Harrisburg, NC 28075

Direct any questions concerning submittal review status, review comments, or drawing markups to the following contacts:

Primary Structures Contact:

Paul Lambert
(919) 250 – 4041
(919) 250 – 4082 facsimile
plambert@dot.state.nc.us

Secondary Structures Contacts:

James Gaither (919) 250 – 4042
Man-Pan Hui (919) 250 – 4044

Eastern Regional Geotechnical Contact (Divisions 1-7):

K. J. Kim
(919) 662 – 4710
(919) 662 – 3095 facsimile
kkim@dot.state.nc.us

Western Regional Geotechnical Contact (Divisions 8-14):

John Pilipchuk
(704) 455 – 8902
(704) 455 – 8912 facsimile
jpilipchuk@dot.state.nc.us

3.0 SUBMITTAL COPIES

The quantities provided in this Special Provision act as a guide in the submittal process.

Unless otherwise required by the contract, submit two sets of supporting calculations to the Structure Design Unit.

Furnish one complete copy of the submittal, including all attachments, to the Resident Engineer. If requested, provide additional copies of any submittal. At the same time, submit the following number of copies directly to the Structure Design Unit and/or the Geotechnical Engineering Unit:

Working Drawing Submittal	Copies Required by Structure Design Unit	Copies Required by Geotechnical Engineering Unit	Contract Reference Requiring Submittal ¹
Arch Culvert Falsework	5	0	Plan Note & SN Sheet
Box Culvert Falsework ²	5	0	Plan Note & SN Sheet
Cofferdams ⁴	6	1	Articles 410-5 and 420-8
Expansion Joint Seals (hold down plate type with base angle)	9	0	“Expansion Joint Seals”
Expansion Joint Seals (modular)	2, then 9	0	“Modular Expansion Joint Seals”
Expansion Joint Seals (strip seals)	9	0	“Strip Seals”
Falsework & Forms (superstructure)	8	0	Article 420-3
Falsework & Forms ² (substructure)	8	0	Article 420-3
Mechanically Stabilized Earth Retaining Walls ⁴	7	1	“MSE Retaining Walls”
Metal Bridge Railing	8	0	Plan Note
Metal Stay-in-Place Forms	8	0	Article 420-3
Metalwork for Elastomeric Bearings ^{5,6}	7	0	Article 1072-10
Miscellaneous Metalwork ^{5,6}	7	0	Article 1072-10
Overhead Sign Assemblies	13	0	Article 903-3(C)
Pile Points	7	1	Article 450-8(D) & “Steel Pile Points”
Placement of Equipment on Structures (cranes, etc.)	7	0	Article 420-20

Precast Concrete Box Culverts	2, then 1 reproducible	0	“(Optional) Precast Reinforced Concrete Box Culvert at Station ____”
Precast Retaining Wall Panels	10	0	Article 1077-2
Pot bearings ⁵	8	0	“Pot Bearings”
Prestressed Concrete Deck Panels	6 and 1 reproducible	0	Article 420-3
Proprietary retaining walls ⁴	9	0	Applicable Project Special Provision
Prestressed Concrete Girder (strand elongation and detensioning sequences)	6	0	Articles 1078-8 and 1078-11
Prestressed Concrete Cored Slab (detensioning sequences) ³	6	0	Article 1078-11
Revised Bridge Deck Plans (adaptation to metal stay-in-place forms)	2, then 1 reproducible	0	Article 420-3
Revised Bridge Deck Plans (adaptation to modular expansion joint seals)	2, then 1 reproducible	0	“Modular Expansion Joint Seals”
Soil Nail Retaining Walls ⁴	4	1	Applicable Project Special Provision
Sound Barrier Wall Steel Fabrication Plans ⁶	7	0	Article 1072-10 & “Sound Barrier Wall”
Sound Barrier Wall Casting Plans	10	0	Article 1077-2 & “Sound Barrier Wall”
Structural Steel ⁵	2, then 7	0	Article 1072-10
TFE Expansion Bearings ⁵	8	0	Article 1072-10
Temporary Detour Structures ⁴	10	1	Article 400-3 & “Construction, Maintenance and Removal of Temporary Structure at Station ____”
Temporary Shoring ⁴	6	1	Article 410-4 & “Temporary Shoring for Maintenance of Traffic”

Temporary Fabric or Wire Walls ⁸	0	2	Applicable Project Special Provision
Permanent Anchored Tieback Retaining Walls ⁴	4	1	Applicable Project Special Provision
Evazote Joint Seals ⁷	9	0	Applicable Project Special Provision
Optional Disc Bearings ⁵	8	0	“Optional Disc Bearings”
Removal of Existing Structure over Railroad	5	0	Railroad Special Provisions
Drilled Pier Construction Sequence Plans ⁸	0	1	“Drilled Piers”
Pile Hammers ⁸	0	1	Article 450-6
Crosshole Sonic Logging (CSL) Reports ⁸	0	1	“Crosshole Sonic Logging”
Pile Driving Analyzer (PDA) Reports ⁸	0	1	“Pile Driving Analyzer”

FOOTNOTES

- References are provided to help locate the part of the contract where the working drawing submittals are required. References in quotes refer to the Project Special Provision by that name. Articles refer to the Standard Specifications.
- Submittals for these items are necessary only when plan notes require them.
- Submittals for these items may not be required. A list of pre-approved sequences is available from the producer or the Materials and Tests Unit.
- These submittals are reviewed by the Structure Design Unit and the Geotechnical Engineering Unit. If NCDOT Shoring Standards are used, working drawings need not be submitted, but the Shoring Selection Form should be forwarded to the Geotechnical Engineering Unit.
- The fabricator may submit these items directly to the Structure Design Unit.
- The two sets of preliminary submittals required by Article 1072-10 of the Standard Specifications are not required for these items.
- Submittals for Fabrication Drawings are not required. Submission of Catalogue Cuts of Proposed Material is required. See Section 5.A of the Project Special Provision.
- Submittals for these items are reviewed by the Geotechnical Engineering Unit only and correspondence regarding these items should be directed to and will come from the Geotechnical Engineering Unit.

ELASTOMERIC BEARINGS

(10-03-02)

Use elastomeric bearings in accordance with Article 1079-2 of the Standard Specifications except as follows:

**TABLE 1079-2
NATURAL RUBBER ELASTOMER REQUIREMENTS**

Grade (durometer)	50	60
PHYSICAL PROPERTIES		
Hardness ASTM D2240	50 +5 -5	60 +5 -5

UNCLASSIFIED STRUCTURE EXCAVATION AT STATION 15+69.00-L-, 18+34.00-L-, 22+85.00-L-

(12-12-02)

The 2002 Standard Specifications shall be revised as follows:

Unclassified structure excavation shall be in accordance with Section 412 of the Standard Specifications with the following exception:

Payment will be made under:

Unclassified Structure Excavation at Station 15+69.00-L-, 18+34.00-L-,
22+85.00-L-.....Lump Sum

PRESTRESSED CONCRETE MEMBERS

3-04-05

In Section 1078-12 of the Standard Specifications. After the first sentence of “5,” place the following:

“Conduit may be rigid one-piece or rigid two-piece (split sheathed). Do not use flexible conduit.”

In Section 1078-13 of the Standard Specifications, after the fourth paragraph add the following paragraph:

“When handling the prestressed concrete members, a temporary stress of $5\sqrt{f_{ci}}$ is permitted, where f_{ci} is the strength of concrete at release, in psi.”

In Section 1078-5 of the Standard Specifications, place the following two sentences after the first paragraph:

“When casting holes through the top flange of Bulb Tee Girders for overhang or interior bay falsework hanger rods use rigid PVC conduits with a wall thickness of approximately 1/8 inch. Do not use thin wall material. Secure conduits in the forms so that they do not migrate out of the proper location. Other methods of forming holes may be proposed but are subject to the Engineer’s approval.”

“When casting dowel rod holes in cored slab or box beam members use material that creates round, vertical holes of the specified diameter and in the correct location. Do not use material that deforms, collapses or shifts position during casting of the member.”

PRESTRESSED CONCRETE PILES

(8-13-04)

In Section 450–11, “Basis of Payment” of the Standard Specifications. When the plans indicate the Engineer is determining the length of piles revise “(B) Cutting off Piles” as follows:

Change the sentence in the second paragraph to read:

“...payment for cutting off each pile will be made at an amount equal to the contract unit price per linear foot (per 0.3 meter) for furnishing and driving the pile which has been cut off.”

CRANE SAFETY

08-15-05

Comply with the manufacturer specifications and limitations applicable to the operation of any and all cranes and derricks. Prime contractors, sub-contractors, and fully operated rental companies shall comply with the current Occupational Safety and Health Administration regulations (OSHA).

Submit all items listed below to the Engineer prior to beginning crane operations involving critical lifts. A critical lift is defined as any lift that exceeds 75 percent of the manufacturer’s crane chart capacity for the radius at which the load will be lifted or requires the use of more than one crane. Changes in personnel or equipment must be reported to the Engineer and all applicable items listed below must be updated and submitted prior to continuing with crane operations.

CRANE SAFETY SUBMITTAL LIST

- A. **Competent Person:** Provide the name and qualifications of the “Competent Person” responsible for crane safety and lifting operations. The named competent person will have the responsibility and authority to stop any work activity due to safety concerns.

- B. **Riggers:** Provide the qualifications and experience of the persons responsible for rigging operations. Qualifications and experience should include, but not be limited to, weight calculations, center of gravity determinations, selection and inspection of sling and rigging equipment, and safe rigging practices.
- C. **Crane Inspections:** Inspection records for all cranes shall be current and readily accessible for review upon request.
- D. **Certifications:** By July 1, 2006, crane operators performing critical lifts shall be certified by NC CCO (National Commission for the Certification of Crane Operators), or satisfactorily complete the Carolinas AGC's Professional Crane Operator's Proficiency Program. Other approved nationally accredited programs will be considered upon request. All crane operators shall also have a current CDL medical card. Submit a list of anticipated critical lifts and corresponding crane operator(s). Include current certification for the type of crane operated (small hydraulic, large hydraulic, small lattice, large lattice) and medical evaluations for each operator.

PILE DRIVING ANALYZER

(6-7-05)

1.0 GENERAL

This special provision governs driving piles with a pile dynamic analyzer (PDA) in accordance with the plans and as directed by the Engineer. The PDA test method is described in ASTM D 4945-00, "Standard Test Method for High-Strain Dynamic Testing of Piles". Install piles in accordance with Section 450 of the Standard Specifications and this special provision.

Submit the proposed pile driving equipment in accordance with the Standard Specifications. The Engineer will respond with preliminary approval or rejection of the proposed pile driving equipment within ten (10) calendar days. Preliminary approval of the proposed pile driving equipment by the Department is required before driving piles with a PDA. Notify the Engineer of the pile driving schedule a minimum of fourteen (14) calendar days in advance.

Either an approved PDA Consultant or the NCDOT Geotechnical Engineering Unit, as directed by the Engineer, must perform PDA testing. The Engineer may require the Contractor to retain a PDA Consultant to provide PDA testing. If the Contractor is required to retain a PDA Consultant, contact the Geotechnical Engineering Unit Contract Administrator for a list of approved PDA Consultants.

The Engineer will determine the number of piles and which piles to be tested with the PDA based upon the subsurface conditions and the pile installation sequence and progress.

The Engineer will complete the review of the proposed pile driving equipment and, when noted on the plans, determine the required pile lengths (order lengths) within ten (10) calendar days after the Engineer receives the complete PDA report or the Geotechnical

Engineering Unit completes the PDA testing. A PDA report for or PDA testing on multiple piles may be required as directed by the Engineer before the 10 day time period begins.

2.0 PREPARATION FOR PDA TESTING

Provide piles for PDA testing that are 5 ft (1.5 m) longer, or as directed by the Engineer, than the estimated pile lengths shown on the plans. Supply 110 V, 60 Hz, 30 Amp of AC electrical power to operate the PDA equipment. Direct current welders or non-constant power sources are unacceptable.

Provide a suitable shelter to protect the PDA equipment and operator from conditions of sun, water, wind and temperature. The shelter should have a minimum floor size of 6 ft x 6 ft (2 m x 2 m) and a minimum roof height of 8 ft (2.5 m). If necessary, heat or cool the shelter to maintain a temperature between 50 and 85 degrees F (10 and 30 degrees C). Place the shelter within 75 ft (23 m) of the pile such that the PDA cables reach the computer and the operator can adequately see the pile. The Engineer may waive the shelter requirement if weather conditions allow.

Drill up to a total of sixteen (16) bolt holes in either two or four sides of the pile, as directed by the PDA Consultant or the Engineer, at an approximate distance equal to three (3) times the pile diameter below the head of the pile. If the PDA Consultant or the Engineer choose to drill the bolt holes, provide the necessary equipment, tools and assistance to do so. A hammer drill is required for concrete piles and up to two (2) hours may be required to drill the holes.

Lift, align and rotate the pile to be tested with the PDA as directed by the PDA Consultant or the Engineer. Place the pile in the leads and template so that the PDA instruments and their accompanying wires will not be damaged.

The PDA Consultant or the Engineer will furnish the PDA measuring instruments and materials for installing the instruments. Attach the PDA instruments as directed by the PDA Consultant or the Engineer after the pile is placed in the leads and the template.

3.0 PDA TESTING

Use only the preliminarily approved pile driving equipment to drive piles with the PDA instruments attached. Drive the pile as directed by the PDA Consultant or the Engineer in order to measure the wavespeed of the pile.

Drive the pile to the required minimum bearing capacity or tip no higher than elevation, whichever is lower, as shown on the plans or as directed by the PDA Consultant or the Engineer. During pile driving, the PDA will be used to evaluate, including but not limited to, the following: hammer performance, bearing capacity, distribution of soil resistance, pile driving stresses, energy transfer, pile integrity and soil variables including quake and damping.

The PDA Consultant or the Engineer may require the Contractor to modify the pile installation procedure during driving as follows:

- Reduce the hammer energy
- Drive deeper or shallower because of variations in the subsurface conditions
- Readjust the transducers
- Realign the pile

The Contractor is responsible in terms of both actual expense and time delays for any damage to the PDA instruments and supporting equipment due to the Contractor's fault or negligence. Replace any damaged equipment at no additional cost to the Department.

4.0 REDRIVING PILES

The Engineer may require redriving piles with the PDA instruments attached. When directed by the Engineer, wait a minimum 24 hours and then redrive the pile in accordance with Section 3.0 above. Notify the Engineer of the pile redriving schedule at least one (1) work day before beginning redriving.

Use the same preliminarily approved pile driving equipment and the compressed pile cushion from the initial drive to redrive the pile. Do not use a cold diesel hammer for a redrive, unless in the opinion of the Engineer, it is impractical to do otherwise. In general, warm up the hammer by applying at least twenty (20) blows to a previously driven pile or timber mats on the ground. Reattach the instruments and obtain the required stroke and minimum amount of penetration (at least 6 in or 150 mm) or as directed by the PDA Consultant or the Engineer. The PDA Consultant or the Engineer will record dynamic measurements during redriving.

The Engineer may require redriving more than once on the same pile. The Engineer will determine when PDA testing has been satisfactorily completed.

5.0 CAPWAP ANALYSIS AND PDA REPORT

The PDA Consultant must perform analysis of the PDA raw data with the Case Pile Wave Analysis Program (CAPWAP). At a minimum, analysis is required for a hammer blow near the end of initial drive and for a redrive hammer blow. Additional CAPWAP analysis may be required as determined by the PDA Consultant or the Engineer.

Submit the PDA report to the Engineer in both electronic and hard copy form, including two (2) original hard copies, within seven (7) calendar days after the PDA testing is completed. The PDA report must include but not be limited to the following:

A. Title Sheet

- NCDOT TIP number and WBS element number

- Description of the project
- County
- Bridge station number
- Location of the pile(s) tested with the PDA
- Name of the personnel
- Date of the report

B. Introduction

C. Site and Subsurface Conditions (including water table elevation)

D. Pile Details

- Pile types and lengths
- Pile design loads (minimum bearing capacity)
- Concrete compressive strength and/or steel pile yield strength
- Pile splice types and locations
- Pile batter (if applicable)

E. Driving Details

- Hammer make, model and type
- Hammer efficiency and operation data including fuel settings, bounce chamber pressure, blows per minute, equipment volume and pressure (if applicable)
- Ground or mud line elevation and template reference elevation at the time of driving (if applicable)
- Final pile tip elevation
- Driving resistance (ram stroke, blows per foot (0.3 meter) and set for last ten hammer blows)
- Use of vibrating hammer, jetting, predrilling and/or spudding (if applicable)
- Redrive information (if applicable)

F. PDA field work details

G. CAPWAP analysis results

- Table showing percent skin and tip, skin and toe damping, skin and toe quake and match quality

H. Summary/Conclusions

I. Attachments

- Boring log(s)
- Field pile driving inspection data (from project inspector)
- Accelerometer and strain gauge locations
- Accelerometer and strain gauge serial numbers and calibration information
- PDA hardware model and CAPWAP software version information
- Electronic copy of all PDA raw data and executable CAPWAP input and output files
- Hammer data

6.0 MEASUREMENT AND PAYMENT

The complete and accepted PDA testing will be paid for at the unit bid price for “PDA Testing” per pile. The unit bid price for conducting PDA testing includes all costs for providing the PDA, PDA instruments and materials for installing the instruments and recording the dynamic measurements during pile driving and re-driving. Also include in this unit bid price all costs for performing the CAPWAP analysis and preparing and submitting the PDA report. No payment for “PDA Testing” will be made if the PDA report submitted is incomplete as described in Section 5.0. No payment for “PDA Testing” will be made if the NCDOT Geotechnical Engineering Unit performs PDA testing.

The complete and accepted PDA assistance will be paid for at the unit bid price for “PDA Assistance” per pile. Include in the unit bid price for “PDA Assistance” all costs for PDA preparation and support including all materials, labor, tools, equipment, mobilization and incidentals necessary to complete the work described in this special provision excluding the costs for the PDA testing described above. Costs for PDA preparation and support for re-drives will not be paid for separately. These costs should be included in the unit bid price for “PDA Assistance”.

The cost for the pile will be paid for separately in accordance with the Standard Specifications and will not be part of either of these PDA pay items.

REMOVAL OF EXISTING STRUCTURE AT STATION 15+69.00-L- (SPECIAL)

Remove the existing bridge located at the site of the proposed bridge in accordance with Section 402 of the Standard Specifications, the applicable permits and this Special Provision.

Salvage the 7 lines of existing 16-inch steel I-beams for the Department of Transportation. Load and transport the salvaged beams to the Creswell Bridge Maintenance Yard at 19275 US Hwy 64E, Creswell, N.C.

Contract Mr. Gerald Woodley, Transportation Supervisor III, at 252-797-4468 at least two weeks prior to delivery.

The Creswell Bridge Maintenance Yard will provided the manpower and the equipment to unload the salvaged beams.

Payment for the above work will be included in the lump sum price bid for “Removal of Existing Structure at Station 15+69.00-L-”.

PRECAST CONCRETE “L” BARRIER

(SPECIAL)

General

Provide the Precast Concrete “L” Barrier in accordance with the plans and applicable Sections of the Standard Specifications. Remove and dispose of the temporary barrier at the applicable construction phase shown in the traffic control plans.


Measurement and Payment

Payment will be made at the contract unit price per linear foot for “Precast Concrete “L” Barrier”. Such payment will include, but is not limited to furnishing all labor, tools, equipment, and materials including Class AA Concrete and epoxy coated reinforcing steel necessary to provide the barrier and later remove and dispose of the barrier as described in this special provision and detailed on the plans.

Payment will be made under:

PRECAST CONCRETE “L” BARRIER

LINEAR FEET

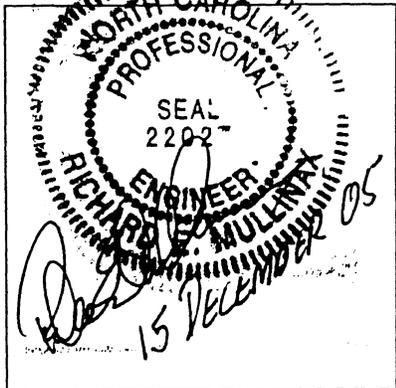

Project Special Provisions (Version 02.16b) Signals and Intelligent Transportation Systems

Prepared By: rmd
15-Dec-05

Contents

1.	2002 STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES – SECTION 1098 REVISIONS.....	2
1.1.	GENERAL REQUIREMENTS (1098-1).....	2
1.2.	SIGNAL HEADS (1098-2).....	2
1.3.	WOOD POLES (1098-6).....	10
1.4.	GUY ASSEMBLIES (1098-7).....	10
1.5.	LOOP LEAD-IN CABLE (1098-9).....	10
1.6.	TYPE 170E CABINETS (1098-19).....	10
1.7.	TYPE 2070L CONTROLLERS (1098-20).....	14
2.	2002 STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES – SECTION 1700 REVISIONS.....	14
2.1.	GENERAL REQUIREMENTS (1700).....	14
2.2.	MESSENGER CABLE (1710).....	15
2.3.	UNDERGROUND CONDUIT (1715).....	15
2.4.	WOOD POLES (1720).....	16
2.5.	RISER ASSEMBLIES (1722).....	16
2.6.	INDUCTIVE DETECTION LOOPS (1725).....	16
2.7.	LOOP LEAD-IN CABLE (1726).....	16
2.8.	CONTROLLERS WITH CABINETS (1751).....	17
3.	GENERAL REQUIREMENTS.....	17
4.	ELECTRICAL REQUIREMENTS.....	17
5.	TEMPORARY TRAFFIC SIGNAL INSTALLATIONS.....	17
5.1.	DESCRIPTION.....	17
5.2.	CONSTRUCTION METHODS.....	17
5.3.	MEASUREMENT AND PAYMENT.....	18

1. 2002 STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES – SECTION 1098 REVISIONS

The 2002 Standard Specifications are revised as follows:

1.1. General Requirements (1098-1)

Page 10-220, Subarticle 1098-1(A)

In the last paragraph, sentence 1, revise “by the date of advertisement of the project” to “by the date of materials installation.”

Pages 10-222,3 Subarticle 1098-1(H)

Replace paragraphs 2, 3, and 4 with the following paragraphs:

Except for grounding conductors, provide signal cable conductors of size Number 16 AWG that are fabricated from stranded copper. **Number 16 AWG cable can only be used with an all LED traffic signal intersection.** Repairs to a non-LED traffic signal intersection must use Number 14 AWG cable.

Provide either 0.05 x 0.30 inch (1.3 x 7.6 mm) aluminum wrapping tape or 0.06 inch (1.5 mm) stainless steel lashing wire for the purpose of lashing cables, except fiber-optic communications cables, to a messenger cable. Use 0.045-inch (1.14-mm) stainless steel lashing wire for the aerial installation of fiber-optic communications cable to messenger cable.

1.2. Signal Heads (1098-2)

Page 10-223, Subarticle 1098-2(A)

In paragraph 5, sentence 4, revise “1 3/8 inch (32 mm) vertical conduit entrance hubs” to “1 1/4 inch (32 mm) vertical conduit entrance hubs” and revise “1 5/8 inch (40 mm) horizontal hubs” to “1 1/2 inch (40 mm) horizontal hubs.”

In the last paragraph, sentence 3, revise “2/5 x 3/4 inch (9.5 mm x 19.1 mm) square head bolts” to “3/8 x 3/4 inch (9.5 mm x 19.1 mm) square head bolts.”

Page 10-225, Subarticle 1098-2(C)

Replace paragraphs 2 and 3 with the following paragraphs:

Unless otherwise required by the plans, provide single-section countdown pedestrian heads with 6 inch (150 mm) minimum deep traditional visors that prevent the sun phantom illumination of the indication.

Where required by the plans, provide two-section pedestrian signal heads with traditional three-sided, rectangular visors 12 inches (300 mm) long.

Replace the last paragraph with the following:

Provide lead-in cable that complies with the loop lead-in cable section of these project special provisions.

Pages 10-225-227, Subarticle 1098-2(E) [**Light Emitting Diode (LED) Sections**]

Replace the entire subarticle with the following two subarticles:

(1) Vehicular

Provide light emitting diode (LED) traffic signal modules (hereafter referred to as modules) that consist of an assembly that uses LEDs as the light source in lieu of an incandescent lamp for use in traffic signal sections. Use LEDs that are aluminum indium gallium phosphorus (AlInGaP) technology for red and yellow indications and indium gallium nitride (InGaN) for green indications. Install the ultra bright type LEDs that are rated for 100,000 hours of

continuous operation from -40°C to +74°C (-40°F to +165°F). Design modules to have a minimum useful life of 60 months, and to meet all parameters of this specification during this period of useful life.

Ensure, unless otherwise stated in these specifications, that each module meets or exceeds the requirements of the Interim Purchase Specification of the ITE VTCSH part 2 (Light Emitting Diode (LED) Vehicular Traffic Signal Modules (hereafter referred to as VTCSH-2). Ensure arrow displays meet or exceed the electrical and environmental operating requirements of VTCSH-2 sections 3 and 5, chromaticity requirements of section 4.2, and the requirements of sections 6.3 (except 6.3.2) and 6.4 (except 6.4.2).

Provide modules that meet the requirements of Table 1098-1. Design the modules to operate from a 60 ±3 HZ AC line voltage ranging from 80 volts to 135 volts. Ensure that fluctuations of line voltage have no visible effect on the luminous intensity of the indications. Design the module to have a normal operating voltage of 120 VAC, and measure all parameters at this voltage.

Table 1098-1
Maximum Power Consumption (in Watts) at 25°C (77°F)

	Red	Yellow	Green
300 mm circular	17	34	24
200 mm circular	10	16	12
300 mm arrow	9	10	11

Certify that the module has a power factor of 0.90 or greater, and that total harmonic distortion (THD) (current and voltage) induced into an AC power line by the module does not exceed 20 percent for modules with power ratings above 15W, and 40 percent for modules with power ratings of 15W or less. Design the module's onboard circuitry to include voltage surge protection to withstand high repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS-2, 1992. Ensure all wiring meets the requirements of Section 13.02 of the ITE Publication: Equipment and Material Standards, VTCSH-2. Provide spade terminals appropriate to the lead wires and sized for a #10 screw connection to the existing terminal block in a standard signal head.

Ensure that the module is compatible with signal load switches and conflict monitors. Design the module to provide sufficient current draw to ensure proper load switch operation while the voltage is varied from a regulated 80 Vrms to 135 Vrms. Design off-state for green and yellow modules to be 30Vrms or greater, and on-state to be 40 Vrms or greater. Design the voltage decay to 10 Vrms or less to be 100 milliseconds or less for green and yellow modules. Ensure that the control circuitry prevents current flow through the LEDs in the off state to avoid a false indication.

Design all modules to meet existing NCDOT monitor specifications for each of the following types of signal monitors: NEMA TS-1 conflict monitors (including so-called NEMA plus features such as dual indication detection and short yellow time detection); NEMA TS-2 Malfunction Management Units (MMU); and 170 cabinet Type 210ECL and 2010ECL conflict monitors (including red monitoring and so-called plus features such as dual indication detection and short yellow time detection).

Ensure that the modules and associated onboard circuitry meet Class A emission limits referred to in Federal Communications Commission (FCC) Title 47, Subpart B, Section 15 regulations concerning the emission of electronic noise.

Provide modules that meet the requirements of Tables 1098-2, 3, and 4. Test all ball modules for luminous intensity at 25°C (77°F) to meet 115% of values in tables 1098-2 and 4. Design and certify the modules to meet or exceed the maintained minimum luminous intensity values throughout the warranty period based on normal use in a traffic signal operation over the operating temperature range. Test the Red and Green modules for maintained luminous intensity (Tables 1098-2, 3, and 4) at 74°C (165°F) (ITE 6.4.2.2). Use LEDs that conform to the chromaticity requirements of VTCSH-2, Section 8.04 throughout the warranty period over the operating temperature range. Make chromaticity coordinate compliance measurements at 25°C (77°F).

Table 1098-2
Specification for 12 inch (300 mm) Extended View Signals

Minimum Luminous Intensity Values (In Candelas)				
Expanded View Vertical Angle	Horizontal Angle (Left/Right)	RED	YELLOW	GREEN
+/-2.5	2.5	339	678	678
	7.5	251	501	501
	12.5	141	283	283
	17.5	77	154	154
+/-7.5	2.5	226	452	452
	7.5	202	404	404
	12.5	145	291	291
	17.5	89	178	178
	22.5	38	77	77
	27.5	16	32	32
+/-12.5	2.5	50	101	101
	7.5	48	97	97
	12.5	44	89	89
	17.5	34	69	69
	22.5	22	44	44
	27.5	16	32	32
+/-17.5	2.5	22	44	44
	7.5	22	44	44
	12.5	22	44	44
	17.5	22	44	44
	(Not Extended View) 22.5	20	41	41
	(Not Extended View) 27.5	16	32	32
+/-22.5	2.5	20	40	40
	17.5	20	40	40

Notes

1. Design signal modules to meet these requirements as a minimum throughout the warranty period.
2. Design signal modules to have a minimum initial intensity equal to 115% of Table 2 at 25°C.
3. Independent laboratory test reports are required to validate the initial intensity.

Table 1098-3
Minimum Initial and maintained Intensities for Arrow Indications (in cd/m2)

	Red	Yellow	Green
Arrow Indication	5,500	11,000	11,000

Table 1098-4
Specification for 8 inch (200 mm) Extended View Signals

Minimum Luminous Intensity Values (In Candelas) for circular indications				
Expanded View Vertical Angle	Horizontal Angle (Left/Right)	RED	YELLOW	GREEN
+/-2.5	2.5	133	267	267
	7.5	97	194	194
	12.5	57	113	113
	17.5	25	48	48
+/-7.5	2.5	101	202	202
	7.5	89	178	178
	12.5	65	129	129
	17.5	41	81	81
	22.5	18	37	37
	27.5	10	20	20
+/-12.5	2.5	37	73	73
	7.5	32	65	65
	12.5	28	57	57
	17.5	20	41	41
	22.5	12	25	25
	27.5	9	16	16
+/-17.5	2.5	16	32	32
	7.5	14	28	28
	12.5	10	20	20
	17.5	9	16	16
	(Not Extended View) 22.5	6	12	12
	(Not Extended View) 27.5	4	9	9

Notes

- Design signal modules to meet these requirements as a minimum throughout the warranty period.
- Design signal modules to have a minimum initial intensity equal to 115% of Table 4 at 25°C.
- Independent laboratory test reports are required to validate the initial intensity.

Table 1098-5
Chromaticity Standards (CIE Chart)

Red	Y: not greater than 0.308, or less than 0.998 - x
Yellow	Y: not less than 0.411, nor less than 0.995 - x, nor less than 0.452
Green	Y: Not less than 0.506 -.519x, nor less than 0.150 + 1.068x, nor more than 0.730 - x

Design the modules as retrofit replacements for installation into standard incandescent traffic sections that do not contain the incandescent lens, reflector assembly, lamp socket and lens gasket. Ensure that installation does not require special tools or physical modification for the

existing fixture other than the removal of the incandescent lens, reflector assembly, lamp socket, and lens gasket.

Provide modules that are rated for use in the operating temperature range of -40°C (-40°F) to $+74^{\circ}\text{C}$ ($+165^{\circ}\text{F}$). Ensure that the modules (except yellow) meet all specifications throughout this range. Fabricate the module to protect the onboard circuitry against dust and moisture intrusion per the requirements of NEMA Standard 250-1991 for Type 4 enclosures to protect all internal components.

Design the module to be a single, self-contained device with the circuit board and power supply for the module inside and integral to the unit.

Design the assembly and manufacturing process for the module to ensure all internal components are adequately supported to withstand mechanical shock and vibration from high winds and other sources. Wire the individual LEDs such that a catastrophic loss or the failure of one LED will result in the loss of not more than 20 percent of the signal module light output. Solder the LEDs to the circuit board.

Fabricate the lens and signal module from material that conforms to ASTM specifications. Ensure enclosures containing either the power supply or electronic components of the module are made of UL94VO flame retardant materials. The lens of the signal module is excluded from this requirement.

Permanently mark the manufacturer's name, trademark, model number, serial number, date of manufacture (month & year), and lot number as identification on the back of the module.

Permanently mark the following operating characteristics on the back of the module: rated voltage and rated power in watts and volt-amperes.

If a specific mounting orientation is required, provide permanent markings consisting of an up arrow, or the word "UP" or "TOP" for correct indexing and orientation within the signal housing.

Provide a lens that is integral to the unit with a smooth outer surface and UV stabilized to withstand ultraviolet exposure for a minimum period of 60 months without exhibiting evidence of deterioration. Coat the front of a polycarbonate lens to make it more abrasion resistant. Seal the lens to the module to prevent moisture and dust from entering the module.

Tint the red and yellow lens to match the wavelength (chromaticity) of the LED. Provide a green lens that is either colorless or tinted to match the wavelength (chromaticity) of the LED.

For 12-inch (300-mm) arrow modules, ensure that the module meets specifications stated in Section 9.01 of the ITE VTCSH for arrow indications. Design arrow displays to be solid LEDs (spread evenly across the illuminated portion of the arrow or other designs), not outlines.

Determine the luminous intensity using the CALTRANS 606 method or similar procedure.

Provide test results for ball modules from an independent testing laboratory showing wattage and compliance with ITE VTCSH-2 specifications 6.4.2, 6.4.4.1, 6.4.4.2, 6.4.4.3, 6.4.5, and 6.4.6.1 as a minimum. Ensure the 6.4.2.1 test meets the requirements of Tables 1098-2 and 4 of this specification. The 6.4.2.2 test is for Red and Green only. Ensure that the LED signal modules tested are typical, average production units.

Burn In - Energize the sample module(s) (a sample of one module minimum) for a minimum of 24 hours, at 100 percent on-time duty cycle, at a temperature of $+74^{\circ}\text{C}$ ($+165^{\circ}\text{F}$) before performing any qualification testing. Any failure of the module, which renders the unit non-

compliant with the specification after burn-in, is cause for rejection. All specifications will be measured including, but not limited to:

- (a) **Photometric (Rated Initial Luminous Intensity)** - Measure at +25°C (+77°F). Measure luminous intensity for red and green modules upon the completion of a 30 minute 100 percent on-time duty cycle at the rated voltage. **Measure luminous intensity for yellow modules immediately upon energizing at the rated voltage.**
- (b) **Chromaticity (Color)** - Measure at +25°C (+77°F). Measure chromaticity for red and green modules upon the completion of a 30 minute 100 percent on-time duty cycle at the rated voltage. Measure chromaticity for yellow modules immediately upon energizing at the rated voltage.
- (c) **Electrical** - Measure all specified parameters for quality comparison of production quality assurance on production modules. (rated power, etc)

Equipment Compatibility - In addition to the 6.4.4.5 test of modules for compatibility with controllers, conflict monitors, and load switches, perform the following test, and certify the results. Connect each signal module to the output of a standard load switch connected to a variable AC voltage supply (95 to 135 VAC). With the load switch "off," vary the AC voltage from 95 Vrms to 135 Vrms, and measure the drop across the module. Readings greater than 15 Vrms are unacceptable.

1. NCDOT evaluates and approves all LED Traffic Signal modules for the QPL by a standard visual inspection and blind operational survey, a compatibility test, current flow, and other random tests, in addition to reviewing the lab reports and documentation from the manufacturer. The tests are conducted at the Traffic Electronics Center in Raleigh. Ensure each 12-inch (300-mm) ball module is visible at 450 feet (135 meters) during sway conditions (extended view) until obscured by the visor. Ensure each 8-inch ball (200-mm) and 12-inch (300-mm) arrow modules are visible at 300 feet (90 meters) during sway conditions (extended view) until obscured by the visor. Sufficient luminance during the extended views will be determined during this blind survey evaluation.

In addition to meeting the performance requirements for the minimum period of 60 months, provide a written warranty against defects in materials and workmanship for the modules for a period of 60 months after shipment acceptance of the modules. Provide replacement modules within 30 days of receipt of modules that have failed at no cost to the State. Provide warranty documentation to the Department before QPL acceptance. Provide luminous intensity testing at an independent lab, to determine degradation, for two modules of each color provided by NCDOT at the end of two and four years of operation.

Provide testing at an independent laboratory for a designated module to be tested for maintained luminous intensity at 25°C (77°F) once each year during the five year warranty period.

(2) Pedestrian

Design the LED pedestrian traffic signal modules for installation into standard pedestrian traffic signal sections that do not contain the incandescent signal section reflector, lens, eggcrate visor, gasket, or socket. Provide a clear 0.25-inch (6.4-mm), non-glare, mat finish lens with a smooth outer surface and UV stabilized to withstand ultraviolet exposure for a minimum period of 60 months without exhibiting evidence of deterioration. Coat the front surface of a polycarbonate lens to make it more abrasion resistant. Ensure that the lens has light transmission properties equal to or greater than 80%.

Ensure installation of all modules requires no physical modification of the existing fixture other than the removal of the incandescent signal section reflector, lens, eggcrate visor and socket where applicable.

Design the countdown display as a double row of LEDs, and ensure the countdown display blanks-out during the initial cycle while it records the countdown time. Ensure that the countdown display is operational only during the flashing don't walk, clearance interval. Blank-out the countdown indication after it reaches zero until the beginning of the next don't walk indication, and design the controlling circuitry to prevent the timer from being triggered during the solid hand indication.

Design the man and hand to be a solid display, which meets the minimum requirements of "The Equipment and Materials Standards" of the Institute of Transportation Engineers (ITE) Chapter 3, Table 1 *Symbol Message*. Wire the LEDs such that a catastrophic loss or failure of one or more LEDs will result in the loss of not more than five percent of the signal module light output.

Ensure that the power consumption for the modules is equal to or less than the following in watts, and that the modules have EPA Energy Star compliance ratings, if applicable to that shape, size and color.

Temperature	77°F (25°C)	165°F (74°C)
Hand	10	12
Man	9	12
Countdown	9	12

Provide 16-inch (400-mm) displays, where required by plan or bid document, that have the hand/man overlay on the left and the countdown on the right. Ensure the hand/man meets the dimension requirements cited in Chapter 3, Table 1 *Symbol Message* for Class 3 displays. Ensure that the countdown number display is at least 7 inches high by 6 inches wide. Configure the signal head with a sufficient number of LEDs to provide an average luminous intensity of at least 342 candela per square feet (3750 candela per square meter) of lighting surface for the "RAISED HAND" and "COUNTDOWN", and 483 candela per square feet (5300 candela per square meter) of lighting surface for the "WALKING PERSON". Ensure they meet this average luminous intensity throughout the warranty period over the operating temperature range.

Provide 12 inch (300 mm) displays, where required by plan or bid document, that meet the dimension requirements cited in Chapter 3, Table 1 *Symbol Message* for Class 2 displays. Furnish three types of modules, the solid hand/man module as an overlay, the solid hand module, and the solid man module. Configure the signal head with a sufficient number of LEDs to provide an average luminous intensity of at least 342 candela per square feet (3750 candela per square meter) of lighting surface for the "RAISED HAND" and "COUNTDOWN", and 483 candela per square feet (5300 candela per square meter) of lighting surface for the "WALKING PERSON". Ensure they meet this average luminous intensity throughout the warranty period over the operating temperature range.

Design all modules to operate using a standard 3 - wire field installation. Provide lead wires that are eighteen gauge (18AWG) minimum copper conductors with 221 degree F (105 degree C) insulation. Ensure that lead wires are a minimum of 30 inches (760 mm) long with NEMA "spade" terminals that are appropriate to the lead wires and sized for a #10 screw connection to the existing terminal block in the signal head. Solder the LEDs to the circuit board.

Ensure that modules are compatible with signal load switches and conflict monitors. Design the module to provide sufficient current draw to ensure proper load switch operation while the voltage is varied from a regulated 80Vrms to 135Vrms. Provide control circuitry to prevent current flow through the LEDs in the off state to avoid a false indication. Design all modules to meet existing NCDOT monitor specifications for each of the following types of signal monitors: NEMA TS-1 conflict monitors (including so-called NEMA plus features such as dual indication detection and short yellow time detection); NEMA TS-2 Malfunction Management Units; and 170 cabinet 210ECL and 2010ECL conflict monitors (including red monitoring and so-called plus features such as dual indication detection and short yellow time detection).

Comply with the following sections: 3.3, 3.5, 3.6, 5.2, 5.3, 5.7, 6.1, 6.3.1, 6.3.3, 6.3.4, 6.3.5, 6.4.4, 6.4.5, and 6.4.6 of “The Equipment and Material Standards” of the Institute of Transportation Engineers “Vehicular Traffic Control Signal Heads” (VTC SH) Part 2, Chapter 2A.

Furnish Portland Orange LEDs for the hand and countdown that are the latest AlInGaP technology or higher, and Lunar White LEDs for the man that are the latest InGaN technology or higher.

Provide certification with the signal modules when offered for evaluation that your product complies with the sections of the ITE specification identified in paragraph 1.12 above and this specification. Provide test results showing that the signal modules meet or exceed the luminous intensity requirements of sections 1.8 and 1.9 of this specification.

Ship each module as a complete kit designed for retrofitting existing pedestrian signal sections with an LED display module. Provide modules that include, but are not limited to the following items: lens, LED display mounted on a circuit board, wire leads with strain relief, rigid housing, electronics including a power supply integral to the LED module which is protected by the housing, and a neoprene one piece gasket. Ensure that the module is compatible with standard, existing, pedestrian head mounting hardware.

Warrant performance for a period of 60 months from the date of installation and include repair or replacement of an LED signal module that exhibits light output degradation, which in the judgment of the Department, cannot be easily seen at 150 feet (45 meters) in bright sunlight with a visor on the housing or which drops below the luminous intensity output requirements. Warrant failure due to workmanship, materials, and manufacturing defects during the first 60 months after the date of installation. Repair or replace any failed modules within 30 calendar days of notification at no cost to the Department.

Page 10-227, Subarticle 1098-2(F)

Replace the first sentence in the paragraph with the following:

Furnish 16-4 and 16-7 signal cable that complies with IMSA specification 20-1 except provide the following conductor insulation colors:

- For 16-4 cable: white, yellow, red, and green
- For 16-7 cable: white, yellow, red, green, yellow with black stripe tracer, red with black stripe tracer, and green with black stripe tracer. Apply continuous stripe tracer on conductor insulation with a longitudinal or spiral pattern.

Provide a ripcord to allow the cable jacket to be opened without using a cutter. IMSA specification 19-1 will not be acceptable.

1.3. Wood Poles (1098-6)

Page 10-228, Article 1098-6

Replace the entire article with the following:

Provide poles of treated southern pine or treated Douglas fir that meet the requirements of ANSI 05.1. Provide Class 3 or better wood poles that are a minimum length of 40 feet (12.2 meters) unless otherwise shown on the plans and are of a sufficient length to maintain minimum required distances above the roadway, obstructions and affected railroad tracks. Mark each pole in accordance with ANSI 05.01. First roof and bore poles and then give them a full-length preservative treatment.

Provide poles with pentachlorophenol or chromated copper arsenate (CCA) preservative, in accordance with AWWA Standard C4-99. Ensure the retention of preservative is a minimum of 0.45 lb. per cubic foot (7.2 kg per cubic meter) for pentachlorophenol and 0.6 lb. per cubic foot (9.6 kg per cubic meter) for CCA.

1.4. Guy Assemblies (1098-7)

Page 10-228, Article 1098-7

Add the following to paragraph two:

Anchor assemblies with double-strand eyes may be used in lieu of those with the triple eye feature when only one guy cable is to be attached. Ensure anchor assemblies are 7 feet (2.13 meters) minimum in length.

1.5. Loop Lead-In Cable (1098-9)

Page 10-230, Article 1098-9

Replace the entire article with the following:

Furnish lead-in cable with conductors of size 18 AWG that are fabricated from stranded copper, and that complies with IMSA Specification 50-2 except as follows:

- Provide the following two pair (4 conductor) conductor insulation pair colors: clear-brown and blue-pink.
- Provide the following four pair (8 conductor) conductor insulation pair colors: clear-brown, blue-pink, clear with black stripe tracer-brown with black stripe tracer, and blue with black stripe tracer-pink with black stripe tracer. Apply continuous stripe tracer on conductor insulation with a longitudinal or spiral pattern.
- Ensure one spirally-wrapped Aluminum Mylar tape is applied with the aluminum side out to completely cover the conductor assembly.
- Provide cable jacket formed from black polyethylene. Ensure the finished jacket provides environmental stress resistance, outdoor weatherability, toughness, low temperature performance, and ultraviolet resistance.
- Provide a ripcord to allow the cable jacket to be opened without using a cutter.

1.6. Type 170E Cabinets (1098-19)

Page 10-241, Subarticle 1098-19(B)

Add the following paragraphs:

If additional surge protected power outlets are needed to accommodate fiber transceivers, modems, etc.; install a UL listed, industrial, heavy-duty type power outlet strip with a maximum rating of 15 A / 125 VAC, 60 Hz. Provide a strip that has a minimum of 3 grounded outlets.

Ensure the power outlet strip plugs into one of the controller unit receptacles located on the rear of the PDA. Ensure power outlet strip is mounted securely; provide strain relief if necessary.

Connect detector call switches for cabinets as follows:

336S Cabinet		332A Cabinet	
Detector Call Switches	Terminals	Detector Call Switches	Terminals
Phase 1	I1-F	Phase 1	I1-W
Phase 2	I2-F	Phase 2	I4-W
Phase 3	I3-F	Phase 3	I5-W
Phase 4	I4-F	Phase 4	I8-W
Phase 5	I5-F	Phase 5	J1-W
Phase 6	I6-F	Phase 6	J4-W
Phase 7	I7-F	Phase 7	J5-W
Phase 8	I8-F	Phase 8	J8-W

Pages 10-245-247, Subarticle 1098-19 (D) (**Model 2010 Enhanced Conflict Monitor**)

Replace Subarticle (D) with the following:

Furnish Model 2010 Enhanced Conflict Monitors with 16 channels. In addition to CALTRANS requirements, ensure that the conflict monitor monitors for the absence of a valid voltage level on at least one channel output of each load switch. Ensure that the absence of the programming card will cause the conflict monitor to trigger, and remain in the triggered state until reset.

Provide a conflict monitor that recognizes the faults specified by CALTRANS and the following additional per channel faults that apply for monitor inputs to each channel:

- consider a Red input greater than 70 Vrms as an “on” condition;
- consider a Red input less than 50 Vrms as an “off” condition (no valid signal);
- consider a Red input between 50 Vrms and 70 Vrms to be undefined by these specifications;
- consider a Yellow or Green input greater than 25 Vrms as an “on” condition;
- consider a Green or Yellow input less than 15 Vrms as an “off” condition; and
- consider a Green or Yellow input between 15 Vrms and 25 Vrms to be undefined by these specifications.

Ensure that the monitor will trigger upon detection of a fault and will remain in the triggered (failure detected) state until the unit is reset at the front panel or through the remote reset input for the following failures:

1. **Red Monitoring or Absence of Any Indication (Red Failure):** A condition in which no valid voltage signal is detected on any of the green, yellow, or red inputs to a given monitor channel. If a signal is not detected on at least one input (R, Y, or G) of a conflict monitor channel for a period greater than 1000 ms when used with a 170 controller and 1500 ms when used with a 2070L controller, ensure that the monitor will trigger and put the intersection into flash. If the absence of any indication condition lasts less than 750 ms when used with a 170 controller and 1200 ms when used with a 2070L controller, ensure that the conflict monitor will not trigger. Have red monitoring occur when the P20 Connector is installed and both of the following input conditions are in effect: a) the Red Enable input to

monitor is active (Red Enable voltages are “on” at greater than 70 Vrms, off at less than 50 Vrms, undefined between 50 Vrms and 70 Vrms), and b) and neither Special Function 1 nor Special Function 2 inputs are active.

2. **Yellow Indication Sequence Error:** Yellow indication following a green is missing or shorter than 2.7 seconds (with ± 0.1 -second accuracy). If a channel fails to detect an “on” signal at the Yellow input following the detection of an “on” signal at a Green input for that channel, ensure that the monitor triggers and generates a sequence error fault indication.
3. **Dual Indications on the Same Channel:** In this condition, more than one indication (R,Y,G) is detected as “on” at the same time on the same channel. If dual indications are detected for a period greater than 500 ms, ensure that the conflict monitor triggers and displays the proper failure indication (Dual Ind fault). If this condition is detected for less than 250 ms, ensure that the monitor does not trigger.

Enable the monitor function for short/missing yellows and for dual indications on a per channel basis.

Provide Special Function 1 and Special Function 2 that comply with the Los Angeles City DOT Traffic Signal Specification DOT 170 ATSAC Universal and Related Equipment #54-053-02 to eliminate red failure monitoring while allowing other additional enhanced fault monitoring functions to continue.

Ensure that the removal of the P-20 ribbon cable will cause the monitor to recognize a latching fault condition and place the cabinet into flashing operation.

Ensure that when the Conflict Monitor is triggered due to a fault, it provides an LED indication identifying the type of failure detected by the monitor except for the P20 ribbon cable removal fault. Ensure that the monitor indicates which channels were active during a conflict condition and which channels experienced a failure for all other per channel fault conditions detected, and that these indications and the status of each channel are retained until the Conflict Monitor is reset.

Ensure that the conflict monitor will store at least nine of the most recent malfunctions detected by the monitor in EEPROM memory. For each malfunction, record at a minimum the time, date, type of malfunction, relevant field signal indications, and specific channels involved with the malfunction.

Provide communications from the monitor to the 170/2070L controller via an RS-232C/D port on the monitor in order to upload all event log information from the monitor to the controller or to a Department-furnished system computer via the controller. Ensure that the controller can receive the data through a controller Asynchronous Communications Interface Adapter (Type 170E) or Async Serial Comm Module (2070L) determined by the controller software. Provide software capable of communicating directly through the same monitor RS-232C/D to retrieve all event log information to a Department-furnished laptop computer.

In addition to the connectors required by the CALTRANS Specifications, provide the conflict monitor with a connector mounted on the front of the monitor (3M-3428-5302 with two polarizing keys or equal) which mates with a 20 pin ribbon cable connector that conducts the signals from the P20 connector on the cabinet assembly. Provide a P20 connector and terminal assembly that complies with the Los Angeles City DOT “Traffic Signal Specification DOT 170 ATSAC Universal and Related Equipment #54-053-02” in effect on the date of advertisement. Provide connector pins on the monitor with the following functions:

Pin #	Function	Pin #	Function
1	Channel 15 Red	11	Channel 9 Red
2	Channel 16 Red	12	Channel 8 Red
3	Channel 14 Red	13	Channel 7 Red
4	Chassis Ground	14	Channel 6 Red
5	Channel 13 Red	15	Channel 5 Red
6	Special Function 2	16	Channel 4 Red
7	Channel 12 Red	17	Channel 3 Red
8	Special Function 1	18	Channel 2 Red
9	Channel 10 Red	19	Channel 1 Red
10	Channel 11 Red	20	Red Enable

Provide a DB-9 female connector for the purpose of data communication with the controller. Electrically isolate the port interface electronics from all monitor electronics, excluding Chassis Ground. Furnish a communications connecting cable with pin connections as follows:

170		Conflict Monitor DB-9
RX pin L	Connect to	TX pin 2
TX pin K	Connect to	RX pin 3
+5 pin D	Connect to	DTR pin 4
GND pin N	Connect to	GND pin 5

2070L		Conflict Monitor DB-9
DCD pin 1	Connect to	DCD pin 1
RX pin 2	Connect to	TX pin 2
TX pin 3	Connect to	RX pin 3
GND pin 5	Connect to	GND pin 5
RTS pin 7	Connect to	CTS pin 7
CTS pin 8	Connect to	RTS pin 8

Pages 10-247, Subarticle 1098-19(E)

Replace Subarticle (E) with the following:

Furnish external electrical service disconnects with a single pole 50 ampere circuit breaker with a minimum of 10,000 RMS symmetrical amperes short circuit current rating in a lockable NEMA 3R enclosure. Ensure service disconnects are UL listed and marked as being suitable for use as service equipment. Fabricate enclosure from galvanized steel and electrostatically apply dry powder paint finish, light gray in color, to yield a minimum thickness of 2.4 mils (60 µm). Provide ground bus and neutral bus with a minimum of four terminals with a minimum wire capacity range of number 14 through number 4.

Furnish a NEMA Type 3R outdoor enclosure, 100 Ampere rated meter base. Furnish a 4 terminal, 600 volt, single phase, 3 wire meter base that complies with the following:

- Line, Load, and Neutral Terminals accept #8 to 2/0 AWG Copper/Aluminum wire
- Ringless Type without bypass
- Made of galvanized steel
- Meet the UL-414 standard

- Overhead and underground service entrance

Provide meter bases in which the ampere rating of the meter sockets are based on the meter sockets being wired with a minimum of 167 degrees F (75 degrees C) insulated wire. Ensure that the meter bases have an electrostatically applied dry powder paint finish, light gray in color, with a minimum thickness of 2.4 mils (60 μm).

Furnish 1-inch (25-mm) watertight hub for threaded rigid conduit with meter base.

If meter base and electrical service disconnect are supplied in the same enclosure, ensure assembly is UL listed and marked as being suitable for use as service equipment.

1.7. Type 2070L Controllers (1098-20)

Page 10-247, Article 1098-20

Replace the entire article with the following:

Conform to CALTRANS Traffic Signal Control Equipment Specifications and all addenda in effect on the date of advertisement except as required herein. Where an item is no longer cited, the last applicable specification applies.

Furnish Model 2070L controllers. Ensure that removal of the program module from the controller will place the intersection into flash.

The Department will provide software at the beginning of the burning-in period. Contractor shall give 5 working days notice before needing software. Program software provided by the Department.

Provide model 2070L controllers with the latest version of OS9 operating software and device drivers, composed of the unit chassis and at a minimum the following modules and assemblies:

- MODEL 2070 1B, CPU Module, Single Board
- MODEL 2070-2A, Field I/O Module (FI/O)
- MODEL 2070-3B, Front Panel Module (FP), Display B (8x40)
- MODEL 2070-4A, Power Supply Module, 10 AMP
- MODEL 2070-7A, Async Serial Com Module (9-pin RS-232)

Furnish one additional MODEL 2070-7A, Async Serial Com Module (9-pin RS-232) for all master controller locations.

Furnish one removable data key with each 2070L controller unit.

For each master location and central control center, furnish a U.S. Robotics V.92 or approved equivalent auto-dial/auto-answer external modem to accomplish the interface to the Department-furnished microcomputers. Include all necessary hardware to ensure telecommunications.

2. 2002 STANDARD SPECIFICATIONS FOR ROADS & STRUCTURES – SECTION 1700 REVISIONS

The 2002 Standard Specifications are revised as follows:

2.1. General Requirements (1700)

Page 17-1, Subarticle 1700-3 (C), replace the 3rd paragraph with the following paragraph:

The Department will be responsible for direct payment of monthly utility company usage charges. The Contractor will be responsible for all expenses associated with utility installation costs, hookups, etc.

Page 17-2, Subarticle 1700-3 (D), add the following paragraph:

Except for damages and malfunctions caused by the contractor's work activities, the contractor will not be held responsible for pre-existing conditions that were reported to the Engineer before starting traffic signal work at the specific intersection. The contractor will assume responsibility for all maintenance and emergency services necessary once traffic signal work has begun at the specific intersection, and for all damages and malfunctions caused either directly or indirectly by the contractor's work activities.

In the event the contractor fails to perform in accordance with the plans and specifications within the time frame specified, the Department reserves the right to perform the maintenance and emergency service necessary to assure continuous traffic signal operation. Further, all expenses incurred by the Department in implementing this option will be deducted from the payment due the contractor, plus a \$2,500 liquidated damage per occasion, per day, or any portion thereof, until corrected. The liquidated damages are due to increased public hazard resulting from the malfunction.

Page 17-2, Subarticle 1700-3 (F)

In paragraph 2, sentence 2, delete "type 1."

Page 17-3, Subarticle 1700-3 (J)

In paragraph 2, sentence 2, revise "detectable metallic burial tape" to "marker tape."

Page 17-3, Article 1700-3, add Subarticle (K) to read as follows:

(K) Electrical Bonding

Using an approved termination means, connect a Number 14 AWG min. 19-strand copper conductor (Type THW) with green insulation to serve as an equipment grounding conductor to metal poles with mast arm supports, vehicular and pedestrian signal pedestals, and other metallic components which are not otherwise bonded through means approved by the Engineer.

2.2. Messenger Cable (1710)

Page 17-6, Article 1710-3

In paragraph 5, revise "provide a minimum of 30 feet (9.1 m)" to "provide a minimum of 27 feet (8.2 m)".

2.3. Underground Conduit (1715)

Page 17-8, Subarticle 1715-3(A)

Add the following paragraph:

Install metallic conduit at all locations where conduits traverse railroad tracks or as shown on the plans. For all other locations, install nonmetallic conduit unless otherwise shown on the plans. Backfill with excavated material and compact to 95% of its original density. Remove any rock and debris from backfill material.

Page 17-8, Subarticle 1715-3(C)

Delete the first paragraph.

Page 17-8, Subarticle 1715-3(D)

Replace reference to Article 342-3 with reference to Article 1540-3 (A&B).

Page 17-8, Subarticle 1715-3(E)

Revise the last sentence to:

Label all tracer wires. Terminate tracer wire to equipment ground bus as specified in the plans.

2.4. Wood Poles (1720)

Page 17-10, Article 1720-3

Replace the fourth paragraph with the following paragraph:

On joint use poles and NCDOT owned poles, at signal and intelligent transportation systems equipment installations (i.e. controller cabinets, CCTV cabinets, DMS cabinets, etc.), bond the messenger cable to the existing pole ground using bundy clamps at each end and at 1300-foot intervals. On multiple messenger cable arrangements, connect all messenger cable ends with #6 solid bare copper wire and bond with split bolt connectors or bundy clamps (UCG25RS) or equivalent. On joint use and NCDOT owned poles, if an existing pole ground does not exist, install a grounding system consisting of a #6 AWG bare copper wire that is exothermically welded to a ground rod.

In the last paragraph, last sentence, revise “5/8 inch x 8 foot (16 mm x 2.4 m) ground rod” to “5/8 inch x 10 foot (16 mm x 3.0 m) ground rod.”

2.5. Riser Assemblies (1722)

Page 17-12, Article 1722-3

In paragraph 4 add the following after the last sentence:

Install conduit on all risers for lead-in cable.

2.6. Inductive Detection Loops (1725)

Page 17-13, Article 1725-3

Add the following paragraph before paragraph 1:

All work performed in this section must be done in the presence of the Engineer.

Replace paragraph 6 with the following:

Before sealing loop conductors, test that impedance from the loop wire to ground is at least 100 megohms. For each location with inductive loops, submit a completed “Inductive Detection Loop & Grounding Test Results” form and place copy in controller cabinet. Ensure all loops are included on form. The form is located on the Department’s website at:

<http://www.ncdot.org/doh/preconstruct/traffic/tmssu/ws/default.htm>

2.7. Loop Lead-In Cable (1726)

Page 17-14, Article 1726-3

Replace paragraph 1 with the following:

Install lead-in cable.

Delete paragraph 3.

In paragraph 4, delete “type 1.”

In paragraph 6, revise “less than 0.0036 ohms per foot (0.012 ohms per meter)” to “less than 0.00885 ohms per foot (0.0295 ohms per meter).”

Page 17-15, Article 1726-4

Replace the last sentence with the following:

No measurement will be made between 2-pair and 4-pair lead-in cable as this will be considered incidental to furnishing and installing lead-in cable.

2.8. Controllers with Cabinets (1751)

Page 17-34, Subarticle 1751-3(A)

In paragraph 3, replace sentence 2 with the following:

For all other installations, do not program the controller for late night flashing operation unless otherwise directed.

Page 17-34, Subarticle 1751-3(B)

Add the following paragraph after the first paragraph:

Program telemetry command sequences and enable devices necessary for testing of communication between local controllers and field master controllers, and between field master controllers and the Department-furnished central computer.

Page 17-34, Article 1751-4

Replace paragraph 2 with the following:

Actual number of each type of detector cards (2-channels) furnished, installed, and accepted. If 4-channel detector cards are used in order to fulfill the requirements of the plans, payment will be allowed for two detector cards for each 4-channel detector card.

In paragraph 3, revise "No measurement will be made..." to include "modems and meter bases."

Page 17-35, Article 1751-5

Replace paragraph 2 with the following:

The quantity of detector cards, measured as provided above, will be paid for at the contract unit price each for "Detector Card (_____)."

In paragraph 3, revise "Detector Channel" to "Detector Card."

3. GENERAL REQUIREMENTS

Comply with the requirements of Division 17 of the 2002 Standard Specifications for Roads and Structures.

4. ELECTRICAL REQUIREMENTS

Ensure that an IMSA certified, or equivalent, Level II traffic qualified signal technician is standing by to provide emergency maintenance services whenever work is being performed on traffic signal controller cabinets and traffic signal controller cabinet foundations. Stand by status is defined as being able to arrive, fully equipped, at the work site within 30 minutes ready to provide maintenance services.

5. TEMPORARY TRAFFIC SIGNAL INSTALLATIONS

5.1. DESCRIPTION

Install and remove temporary traffic signals.

5.2. CONSTRUCTION METHODS

When a traffic signal is installed for control of traffic during construction of the project and scheduled for removal during or upon completion of the project, install and remove the temporary traffic signal as required by the plans. Upon removal of the temporary traffic signal, restore the surface to a like-new condition. Rake smooth unpaved areas, repave paved areas to like-new conditions, and seed grassed areas that are damaged.

Prepare the intersection for sign control before removing the temporary traffic signal. Install the required regulatory signs in accordance with Sections 900, 901, and 903 of the Standard Specifications. Cover the signs with burlap bags until the traffic signal is placed into flashing operation.

Place the traffic signal into flashing operation and uncover the signs simultaneously. Allow flashing operation for a minimum of one week before removal.

Signal cabinets, controllers, detector units, signal heads and accessories, and microwave detectors are the property of the Department. Return Department owned equipment between 8:00 a.m. and 12:00 p.m., Monday through Thursday, to the Traffic Services Office within the Division responsible for the administration of the project. Assume ownership of removed poles, messenger cable, interconnect cable, communications cable, supporting hardware, and loop emulator detection equipment, unless otherwise specified in the contract.

The Department will deduct the cost of Department-owned equipment damaged by the contractor from money due to the contractor.

5.3. MEASUREMENT AND PAYMENT

There will be no direct payment for work covered in this section. Payment at the contract unit prices for the various items in the contract will be full compensation for all work covered by this section.