

TEMPORARY PAVEMENT MARKING SCHEDULE


PROJECT REFERENCE NO. R-2409B	SHEET NO. PM-1
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

SYMBOL	DESCRIPTION	QUANTITY BREAKDOWN	PAY ITEM	TOTAL QUANTITY
	REMOVAL OF PAVEMENT MARKING LINES	6000 FT	4"	6000 FT
PAVEMENT MARKING LINES				
AC	2' WHITE MINISKIP	12 FT	PAINT (4")	12 FT
AD	WHITE EDGELINE	10580 FT	PAINT (4")	10580 FT
AU	YELLOW DOUBLE CENTER (2X)	11500 FT	PAINT (4")	11500 FT
AO	WHITE STOP BAR	16 FT	PAINT (24")	16 FT
TEMPORARY RAISED PAVEMENT MARKERS				
CC	YELLOW & YELLOW	150 EA		150 EA

FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	QUANTITY BREAKDOWN	PAY ITEM	TOTAL QUANTITY
PAVEMENT MARKING LINES				
AC	2' WHITE MINISKIP	12 FT	POLYUREA (4")	12 FT
AD	WHITE SOLID LANE LINE	2880 FT	POLYUREA (4")	2880 FT
AE	10' WHITE SKIP	450 FT	POLYUREA (4")	450 FT
AU	YELLOW DOUBLE CENTER LINE	5420 FT	POLYUREA (4")	5420 FT
AO	WHITE STOP BAR	16 FT	POLYUREA (24")	16 FT
PAVEMENT MARKING SYMBOLS				
	MERGE ARROW	5 EA	POLYUREA	5 EA
SNOWPLOWABLE RAISED PAVEMENT MARKERS				
CA	CRYSTAL & RED	44 EA		44 EA
CB	YELLOW & YELLOW	68 EA		68 EA

\$\$\$SYTIME\$\$\$
 \$\$\$DGN\$\$\$
 \$\$\$USERNAME\$\$\$

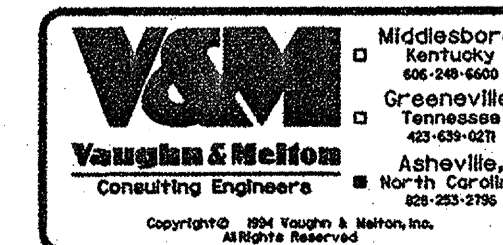


APPROVED: *[Signature]* DATE: 11/15/05

SEAL


**TEMPORARY & FINAL
PAVEMENT MARKING SCHEDULE**

SCALE:	NONE		REVISIONS
DATE:			
DWG. BY:	MDG		
DESIGN BY:	DAJ		
REVIEWED BY:	RMS		


PROJECT REFERENCE NO.	SHEET NO.
R-2409B	PM-2
R/W SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

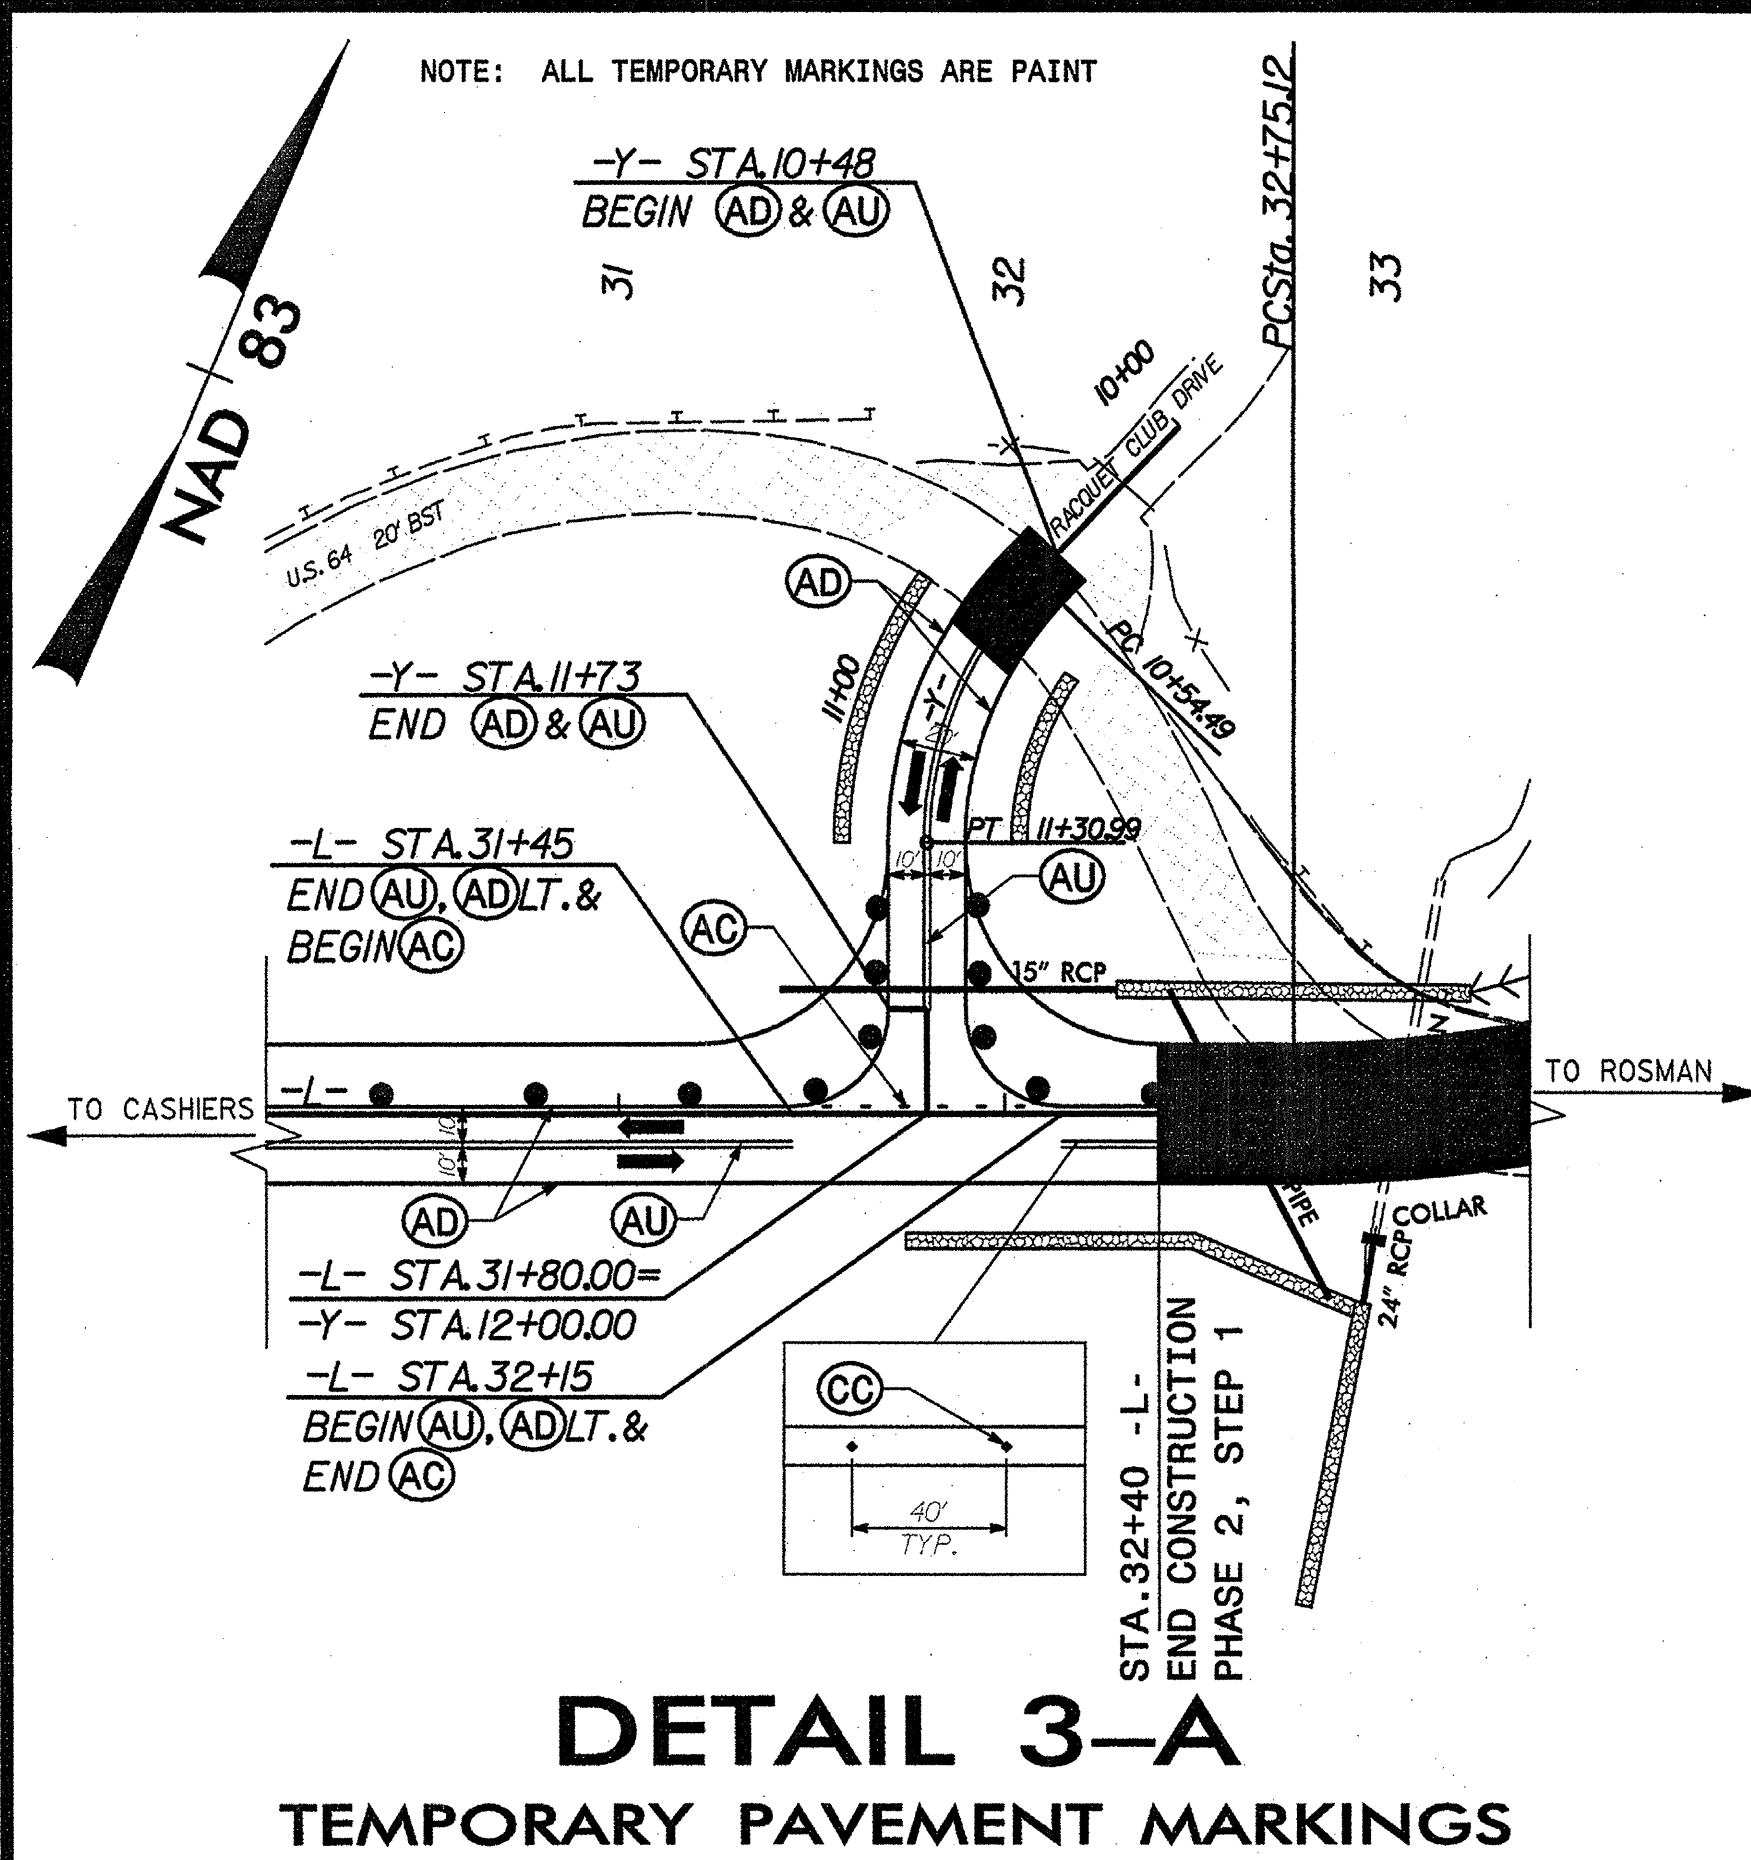

DETAIL 3-A
TEMPORARY PAVEMENT MARKINGS

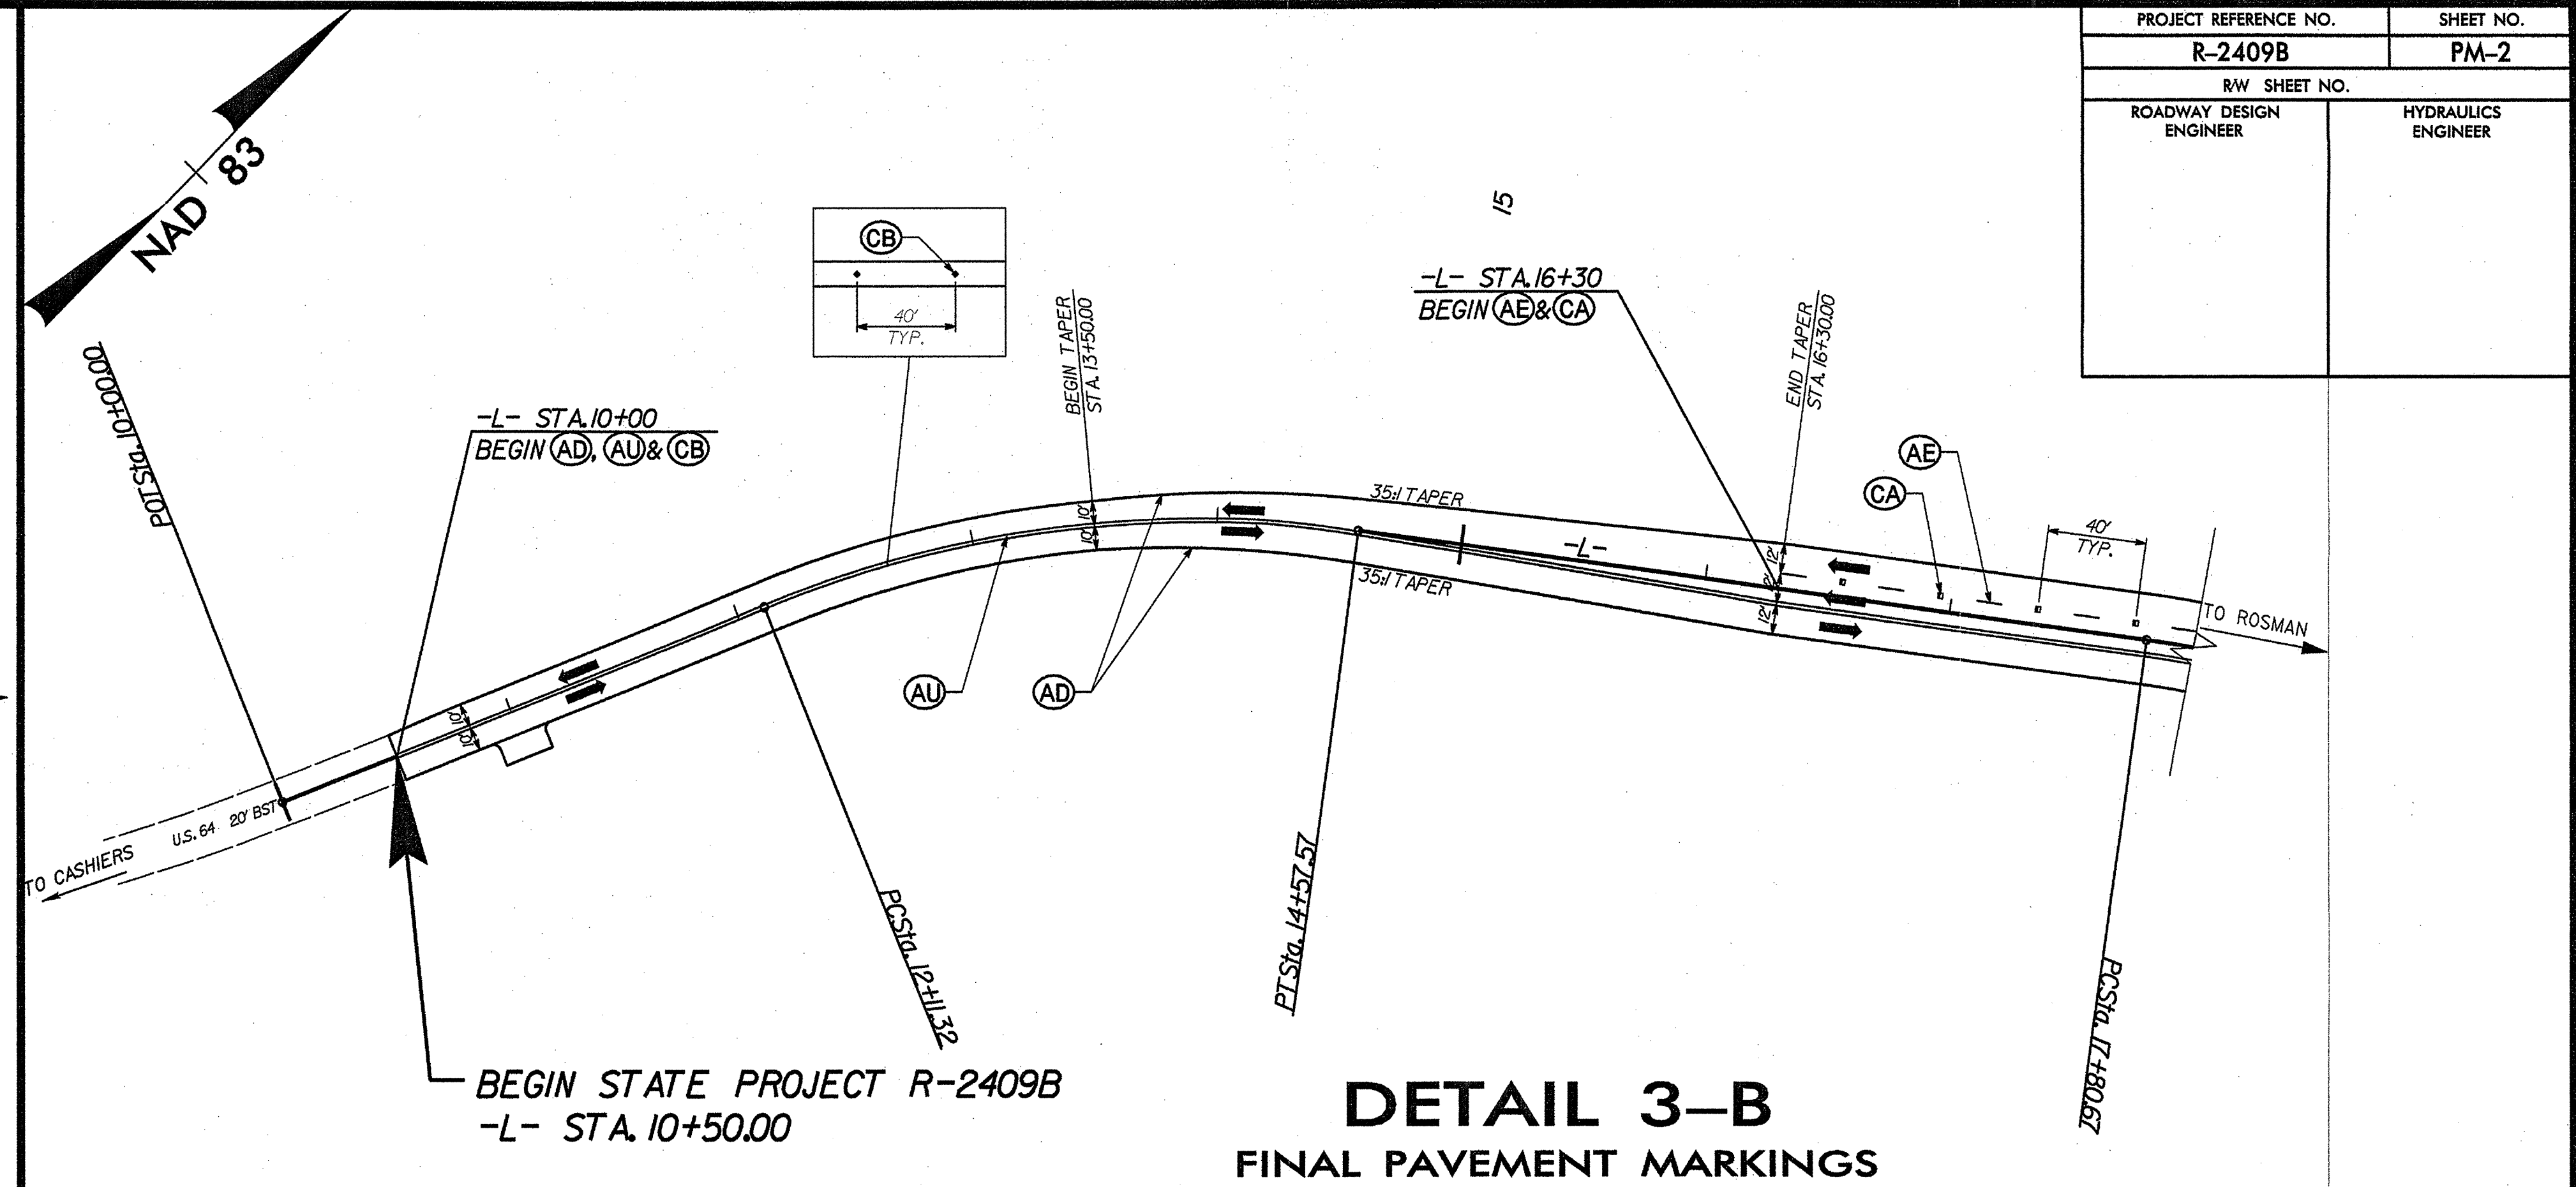


DETAIL 3-B
FINAL PAVEMENT MARKINGS

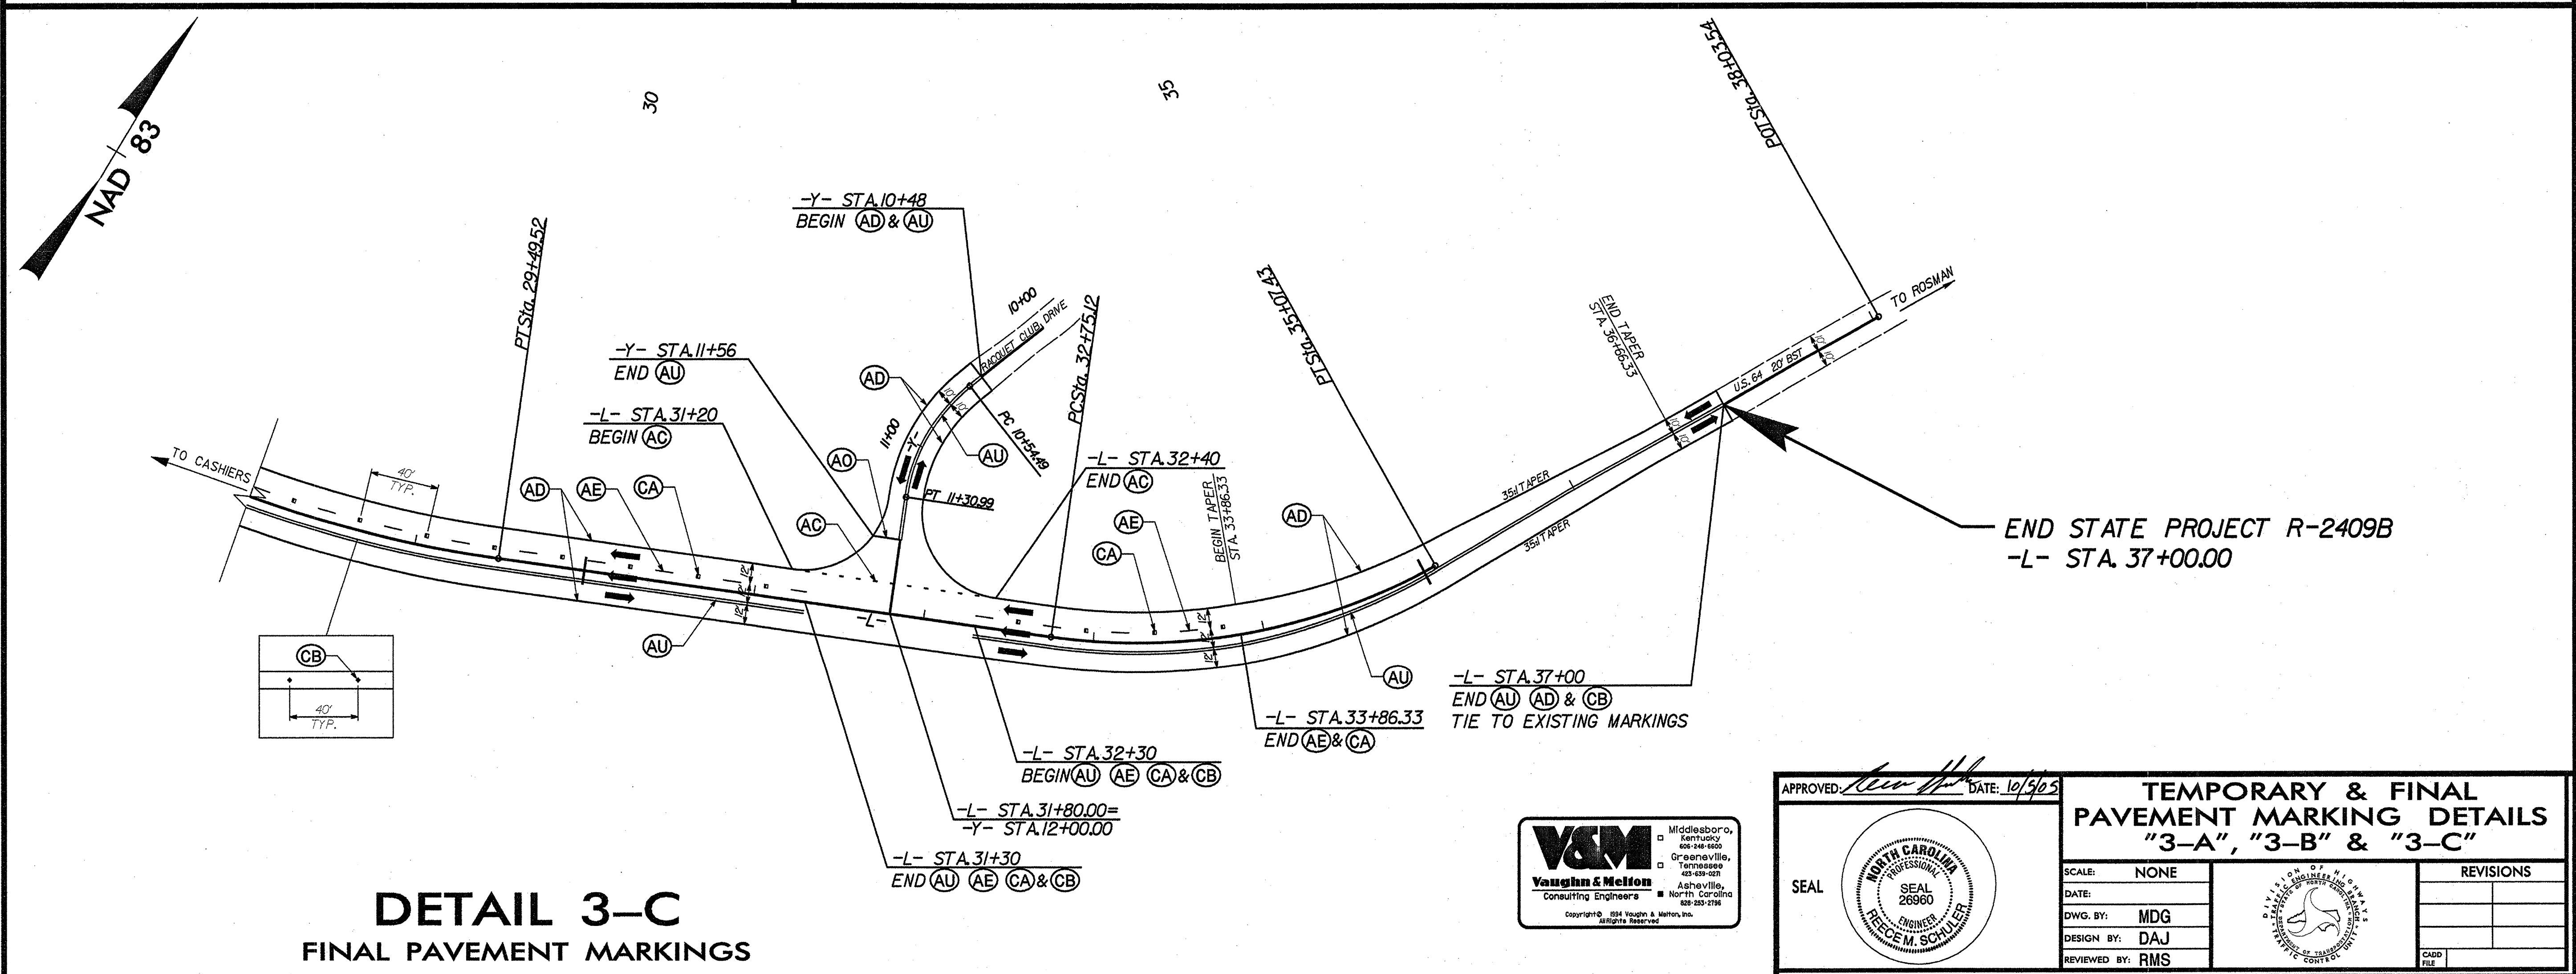


DETAIL 3-C
FINAL PAVEMENT MARKINGS

END STATE PROJECT R-2409B
-L- STA. 37+00.00

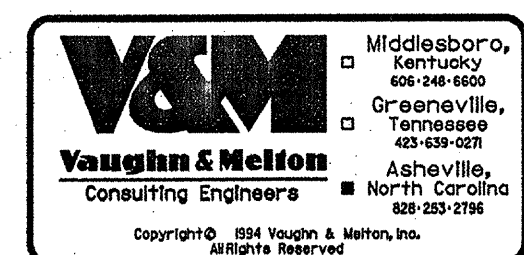


APPROVED: *[Signature]* DATE: 10/30/03

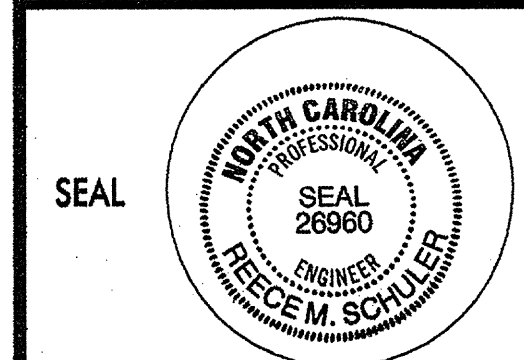

TEMPORARY & FINAL PAVEMENT MARKING DETAILS "3-A", "3-B" & "3-C"

SCALE:	NONE
DATE:	
DWG. BY:	MDG
DESIGN BY:	DAJ
REVIEWED BY:	RMS

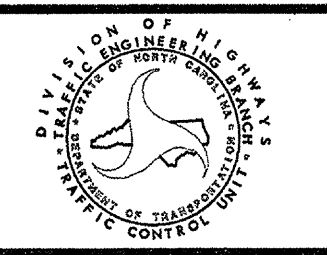

REVISIONS	

\$\$\$\$\$SYTIME\$\$\$\$\$
\$\$\$\$\$DGN\$\$\$\$\$
\$\$\$\$\$USERNAME\$\$\$\$\$