


REFER TO RSD NOS. 1205.01, 1205.02, 1205.03, 1205.04, 1205.05, 1250.01, 1251.01, 1261.01, 1262.01, AND 1264.01 FOR THE PLACEMENT OF TEMPORARY PAVEMENT MARKINGS, MARKERS, AND DELINEATORS UNLESS OTHERWISE NOTED.

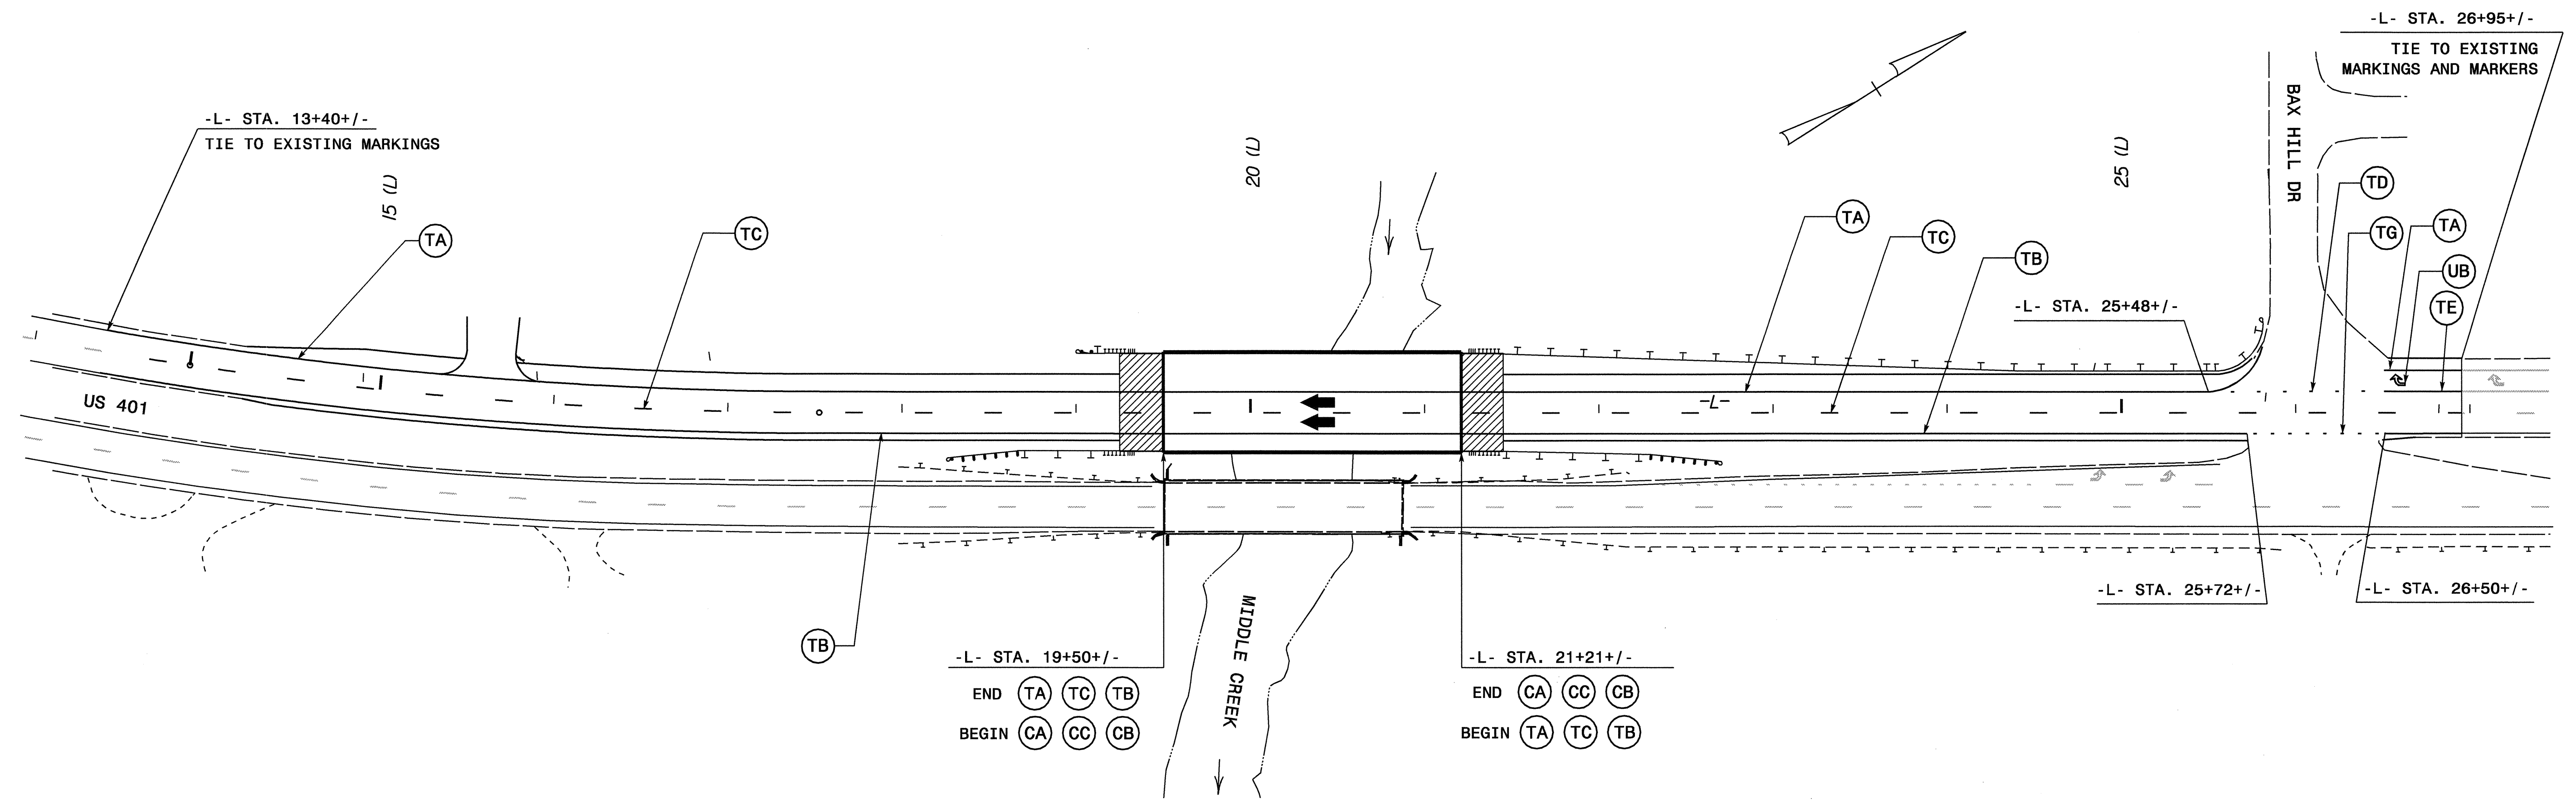

FINAL PAVEMENT MARKING SCHEDULE				
SYMBOL	DESCRIPTION	FINAL PAVEMENT MARKINGS	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
THERMOPLASTIC (4", 90 MIL)				
TA	WHITE EDGELINE		1,355 L.F.	
TB	YELLOW EDGELINE		1,355 L.F.	
			TOTAL	2,710 L.F.
THERMOPLASTIC (4", 120 MIL)				
TC	10 FT. WHITE SKIP		339 L.F.	
TD	2 FT. WHITE MINISKIP		14 L.F.	
TE	WHITE SOLID LANE LINE		45 L.F.	
TG	2 FT. YELLOW MINISKIP		10 L.F.	
			TOTAL	408 L.F.
THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MIL)				
UB	RIGHT TURN ARROW		1 EA.	
			TOTAL	1 EA.
COLD APPLIED PLASTIC - TYPE 3 (4")				
CA	WHITE EDGELINE		171 L.F.	
CB	YELLOW EDGELINE		171 L.F.	
CC	10 FT. WHITE SKIP		43 L.F.	
			TOTAL	385 L.F.
MARKERS				
SNOWPLOWABLE RAISED PAVEMENT MARKERS				
MF	CRYSTAL & RED		17 EA.	
			TOTAL	17 EA.

APPROVED: <i>Chad L. Lanford</i> DATE: 2/15/07	FINAL PAVEMENT MARKING PLAN AND SCHEDULE	
SCALE: NONE	DATE: 01/07	
DWG. BY: CLL	DESIGN BY: CLL	
REVIEWED BY: MMM		

09-FEB-2007 14:07
 \\dot\dfsroot\Proj\TIPProjects\B3916\TrafficControl\Top\B-3916_TC_PMP_01.dgn
 clanford AT WZTC24247