


Project Special Provisions
Structure and Walls

Table of Contents

		Page
		#
1	Evazote Joint Seals (8-13-04)	1
2	Elastomeric Concrete (10-12-01)	6
3	Falsework and Formwork (7-18-06)	7
4	Submittal of Working Drawings (7-12-07)	12
5	Crane Safety (8-15-05)	19
6	Pile Excavation (7-18-06)	19
7	Shipping Steel Structural Members (7-18-06)	21
8	High Strength Bolts (11-17-06)	22
9	Adhesively Anchored Anchor Bolts or Dowels (6-11-07)	23
10	Removal of Existing Structure at Station 16+50.00 -L- (SPECIAL)	24
11	Gabion and Reno Mattress Retaining Wall (SPECIAL)	25
12	Fabric Wall (SPECIAL)	31
13	Chipped Waste Tires (SPECIAL)	34
14	Pile /Panel Wall (SPECIAL)	35

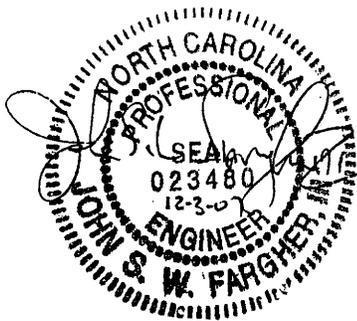

FOR PROVISIONS
11 THRU 14



FOR PROVISIONS
1 THRU 10

PROJECT SPECIAL PROVISIONS
STRUCTURE AND WALLS

PROJECT B-3814

BURKE COUNTY

EVAZOTE JOINT SEALS

(8-13-04)

1.0 SEALS

Use preformed seals compatible with concrete and resistant to abrasion, oxidation, oils, gasoline, salt and other materials that are spilled on or applied to the surface. Use a low-density closed cell, cross-linked ethylene vinyl acetate polyethylene copolymer nitrogen blown material for the seal.

Use seals manufactured with grooves 1/8" (3 mm) ± wide by 1/8" (3 mm) ± deep and spaced between 1/4 (6 mm) and 1/2 inch (13 mm) apart along the bond surface running the length of the joint. Use seals sized so that the depth of the seal meets the manufacturer's recommendation, but is not less than 70% of the uncompressed width. Provide a seal designed so that, when compressed, the center portion of the top does not extend upward above the original height of the seal by more than 1/4 inch (6 mm). Splice the seal using the heat welding method by placing the joint material ends against a teflon heating iron of 350°F (177°C) for 7 - 10 seconds, then pressing the ends together tightly. Do not test the welding until the material has completely cooled. Use material that resists weathering and ultraviolet rays. Provide a seal that has a working range of 30% tension and 60% compression and is watertight along its entire length including the ends.

Provide seals that meet the requirements given below.

TEST	TEST METHOD	REQUIREMENT
Elongation at break	ASTM D3575	210 ± 15%
Tensile strength, psi (kPa)	ASTM D3575	110 ± 15 (755 ± 100)
Compression Recovery (% of original width)	AASHTO T42 50% compr. for 22 hr. @ 73°F (23°C) 1/2 hr. recovery	87 ± 3
Weather/Deterioration	AASHTO T42 Accelerated Weathering	No deterioration for 10 years min.
Compression/Deflection	@ 50% deflection of original width @ 50% deflection of original width	10 psi (69 kPa) min. 60 psi (414 kPa) max.
Tear Strength, psi (kPa)	ASTM D624	16 ± 3 (110 ± 20)
Density	ASTM D545	2.8 to 3.4
Water Absorption (% vol/vol)	ASTM D3575 Total immersion for 3 months	3

Have the top of the evazote seal clearly shop marked. Inspect the evazote seals upon receipt to ensure that the marks are clearly visible upon installation.

2.0 ADHESIVES

Use a two component, 100% solid, modified epoxy adhesive with the seal that meets the requirements of ASTM C881, Type 1, Grade 3, Class B & C and has the following physical properties:

- Tensile strength..... 3500 psi (24.1 MPa) min.
- Compressive strength..... 7000 psi (48.3 MPa) min.
- Shore D Hardness 75 psi (0.5 MPa) min.
- Water Absorption..... 0.25% by weight

Use an adhesive that is workable to 40°F (4°C). When installing in temperatures below 40°F (4°C) or for application on moist, difficult to dry concrete surfaces, use an adhesive specified by the manufacturer of the joint material.

3.0 SAWING THE JOINTS

When the plans call for sawing the joints, the joints shall be initially formed to a width as shown on the plans including the blockout for the elastomeric concrete. Complete placement of the elastomeric concrete after the reinforced concrete deck slab has cured for seven full days and reached a minimum strength of 3000 psi (20.7 Mpa).

Cure the elastomeric concrete for a minimum of 2 days prior to sawing the elastomeric concrete to the final width and depth as specified in the plans.

When sawing the joint to receive the evazote seal, always use a rigid guide to control the saw in the desired direction. To control the saw and to produce a straight line as indicated on the plans, anchor and positively connect a template or a track to the bridge deck. Do not saw the joint by visual means such as a chalk line. Fill the holes used for holding the template or track to the deck with an approved, flowable non-shrink, non-metallic grout.

Saw cut to the desired width and depth in one or two passes of the saw by placing and spacing two metal blades on the saw shaft to the desired width for compression seals.

The desired depth is the depth of the seal plus 1/4 inch (6 mm) above the top of the seal plus approximately 1 inch (25 mm) below the bottom of the seal. An irregular bottom of sawed joint is permitted as indicated on the plans. Grind exposed corners on saw cut edges to a 1/4" (6 mm) chamfer.

Remove any staining or deposited material resulting from sawing with a wet blade to the satisfaction of the Engineer.

Use extreme care to saw the joint straight to the desired width and to prevent any chipping or damage to sawed edges of the joint.

4.0 PREPARATIONS FOR SAWED JOINTS

When the plans call for sawing the joint, the Engineer thoroughly inspects the sawed joint opening for spalls, popouts, cracks, etc. Make all necessary repairs prior to blast cleaning and installing the seal.

Immediately before sealing, clean the joints by sandblasting with clean dry sand. Sandblast to provide a firm, clean joint surface free of curing compound, loose material and any foreign matter. Sandblast without causing pitting or uneven surfaces. The aggregate in the elastomeric concrete may be exposed after sandblasting.

After blasting, either brush the surface with clean brushes made of hair, bristle or fiber, blow the surface with compressed air, or vacuum the surface until all traces of blast products and abrasives are removed from the surface, pockets, and corners.

If nozzle blasting, use compressed air that does not contain detrimental amounts of water or oil.

Examine the blast cleaned surface and remove any traces of oil, grease or smudge deposited in the cleaning operations.

Bond the seal to the blast cleaned surface on the same day the surface is blast cleaned.

5.0 PREPARATIONS FOR ARMORED JOINTS

When the plans call for armored joints, form the joint and blockout openings in accordance with the plans. If preferred, wrap the temporary form with polyethylene sheets to allow for easier removal. Do not use form release agents.

A. Submittals

Submitting detailed working drawings is not required; however, submitting catalog cuts of the proposed material is required. In addition, direct the joint supplier to provide an angle segment placing plan.

B. Surface Preparation

Prepare the surface within the 48 hours prior to placing the elastomeric concrete. Do not place the elastomeric concrete until the surface preparation is completed and approved.

1. Angle Assembly

Clean and free metallized steel of all foreign contaminants and blast the non-metallized steel surfaces to SSPC SP-10. Blast-cleaning anchor studs is not required.

2. Concrete

Prior to placing the elastomeric concrete, thoroughly clean and dry all concrete surfaces. Sandblast the concrete surface in the blockout and clear the surface of all loose debris.

C. Elastomeric Concrete Placement

Make sure that a manufacturer's representative is present when placing elastomeric concrete. Do not place elastomeric concrete if the ambient air temperature is below 45°F (7°C).

Prepare and apply a primer, as per manufacturer's recommendations, to all vertical concrete faces, all steel components to be in contact with elastomeric concrete, and to areas specified by the manufacturer. Align the angles with the joint opening.

Prepare, batch, and place the elastomeric concrete in accordance with the manufacturer's instructions. Place the elastomeric concrete in the areas specified on the plans while the primer is still tacky and within 2 hours after applying the primer. Pay careful attention to properly consolidate the concrete around the steel and anchors. Trowel the elastomeric concrete to a smooth finish.

D. Joint Preparation

Prior to installing the seal, the Engineer thoroughly inspects the armored joint opening for proper alignment and full consolidation of elastomeric concrete under the angle assemblies. Make all necessary repairs prior to cleaning the joint opening and installing the seal.

Clean the armored joint opening with a pressure washer rated at 3000 psi (20.7 MPa) minimum at least 24 hours after placing the elastomeric concrete. Dry the cleaned surface prior to installing the seal.

Examine the cleaned surface and remove traces of oil, grease or smudge deposited during the cleaning operations.

Bond the seal to the cleaned surface on the same day the surface is cleaned.

6.0 SEAL INSTALLATION

Install the joint seal according to the manufacturer's procedures and recommendations and as recommended below. Do not install the joint seal if the ambient air temperature is below 45°F (7°C). Have a manufacturer's representative present during the installation of the first seal of the project.

Begin installation at the low end of the joint after applying the mixed epoxy to the sides of both the joint material and both sides of the joint, making certain to completely fill the grooves with epoxy. With gloved hands, compress the material and with the help of a blunt probe, push it down into the joint until it is recessed approximately 1/4 inch (6 mm) below the surface. Do not push the seal at an angle that would stretch the material. Once work on a joint begins, do not stop until it is completed. Clean the excess epoxy off the surface of the joint material *quickly* and *thoroughly*. Do not use solvents to remove excess epoxy. Remove excess epoxy in accordance with the joint manufacturer's recommendations.

Install the seal so that it is watertight. Testing of the joint seal is not required, but it is observed until final inspection.

7.0 BASIS OF PAYMENT

Payment for all evazote joint seals will be at the lump sum contract price bid for "Evazote Joint Seals" which prices and payment will be full compensation for furnishing all material, including elastomeric concrete when required, labor, tools and equipment necessary for installing these units in place and accepted.

ELASTOMERIC CONCRETE

(10-12-01)

1.0 DESCRIPTION

Elastomeric concrete is a mixture of a two-part polymer consisting of polyurethane and/or epoxy, and kiln-dried aggregate. Have the manufacturer supply it as a unit. Use the concrete in the blocked out areas on both sides of the bridge deck joints as indicated on the plans.

2.0 MATERIALS

Provide materials that comply with the following minimum requirements at 14 days.

CONCRETE PROPERTIES	TEST METHOD	MINIMUM REQUIREMENT
Bond Strength to Concrete, psi (MPa)	ASTM D638 (D638M)	450 (3.1)
Brittleness by Impact, ft-lb (kg-m)	Ball Drop	7 (0.97)
Compressive Strength, psi (MPa)	ASTM D695 (D695M)	2800 (19.3)

BINDER PROPERTIES (without aggregate)	TEST METHOD	MINIMUM REQUIREMENT
Tensile Strength, psi (MPa)	ASTM D638 (D638M)	800 (5.5)
Ultimate Elongation	ASTM D638 (D638M)	150%
Tear Resistance, lb/in (kN/m)	ASTM D624	90 (15.7)

In addition to the requirements above, use elastomeric concrete that also resists water, chemical, UV, and ozone exposure and withstands extreme temperature (freeze-thaw) changes.

Furnish a manufacturer's certification verifying that the materials satisfy the above requirements. Provide samples of elastomeric concrete to the Engineer, if requested, to independently verify conformance with the above requirements.

Require a manufacturer's representative to be present on site during the installation of the elastomeric concrete.

3.0 BASIS OF PAYMENT

No separate payment will be made for elastomeric concrete. The lump sum contract price bid for "Evazote Joint Seals" will be full compensation for furnishing and placing the Elastomeric Concrete.

FALSEWORK AND FORMWORK

(7-18-06)

1.0 DESCRIPTION

Use this Special Provision as a guide to develop temporary works submittals required by the Standard Specifications or other provisions; no additional submittals are required herein. Such temporary works include, but are not limited to, falsework and formwork.

Falsework is any temporary construction used to support the permanent structure until it becomes self-supporting. Formwork is the temporary structure or mold used to retain plastic or fluid concrete in its designated shape until it hardens. Access scaffolding is a temporary structure that functions as a work platform that supports construction personnel, materials, and tools, but is not intended to support the structure. Scaffolding systems that are used to temporarily support permanent structures (as opposed to functioning as work platforms) are considered to be falsework under the definitions given. Shoring is a component of falsework such as horizontal, vertical, or inclined support members. Where the term "temporary works" is used, it includes all of the temporary facilities used in bridge construction that do not become part of the permanent structure.

Design and construct safe and adequate temporary works that will support all loads imposed and provide the necessary rigidity to achieve the lines and grades shown on the plans in the final structure.

2.0 MATERIALS

Select materials suitable for temporary works; however, select materials that also ensure the safety and quality required by the design assumptions. The Engineer has authority to reject material on the basis of its condition, inappropriate use, safety, or nonconformance with the plans. Clearly identify allowable loads or stresses for all materials or manufactured devices on the plans. Revise the plan and notify the Engineer if any change to materials or material strengths is required.

3.0 DESIGN REQUIREMENTS**A. Working Drawings**

Provide working drawings for items as specified in the contract, or as required by the Engineer, with design calculations and supporting data in sufficient detail to permit a structural and safety review of the proposed design of the temporary work.

When concrete placement is involved, include data such as the drawings of proposed sequence, rate of placement, direction of placement, and location of all construction joints. Submit the number of copies as called for by the contract.

When required, have the drawings and calculations prepared under the guidance of, and sealed by, a North Carolina Registered Professional Engineer who is knowledgeable in temporary works design.

Design falsework and formwork requiring submittals in accordance with the 1995 AASHTO *Guide Design Specifications for Bridge Temporary Works* except as noted herein.

1. Wind Loads

Table 2.2 of Article 2.2.5.1 is modified to include wind velocities up to 110 mph (177 km/hr). In addition, Table 2.2A is included to provide the maximum wind speeds by county in North Carolina.

Table 2.2 - Wind Pressure Values

Height Zone feet (m) above ground	Pressure, lb/ft ² (kPa) for Indicated Wind Velocity, mph (km/hr)				
	70 (112.7)	80 (128.7)	90 (144.8)	100 (160.9)	110 (177.0)
0 to 30 (0 to 9.1)	15 (0.72)	20 (0.96)	25 (1.20)	30 (1.44)	35 (1.68)
30 to 50 (9.1 to 15.2)	20 (0.96)	25 (1.20)	30 (1.44)	35 (1.68)	40 (1.92)
50 to 100 (15.2 to 30.5)	25 (1.20)	30 (1.44)	35 (1.68)	40 (1.92)	45 (2.15)
over 100 (30.5)	30 (1.44)	35 (1.68)	40 (1.92)	45 (2.15)	50 (2.39)

2. Time of Removal

The following requirements replace those of Article 3.4.8.2.

Do not remove forms until the concrete has attained strengths required in Article 420-16 of the Standard Specifications and these Special Provisions.

Do not remove forms until the concrete has sufficient strength to prevent damage to the surface.

Table 2.2A - Steady State Maximum Wind Speeds by Counties in North Carolina

COUNTY	25 YR (mph) (km/hr)	COUNTY	25 YR (mph) (km/hr)	COUNTY	25 YR (mph) (km/hr)
Alamance	70 (112.7)	Franklin	70 (112.7)	Pamlico	100 (160.9)
Alexander	70 (112.7)	Gaston	70 (112.7)	Pasquotank	100 (160.9)
Alleghany	70 (112.7)	Gates	90 (144.8)	Pender	100 (160.9)
Anson	70 (112.7)	Graham	80 (128.7)	Perquimans	100 (160.9)
Ashe	70 (112.7)	Granville	70 (112.7)	Person	70 (112.7)
Avery	70 (112.7)	Greene	80 (128.7)	Pitt	90 (144.8)
Beaufort	100 (160.9)	Guilford	70 (112.7)	Polk	80 (128.7)
Bertie	90 (144.8)	Halifax	80 (128.7)	Randolph	70 (112.7)
Bladen	90 (144.8)	Harnett	70 (112.7)	Richmond	70 (112.7)
Brunswick	100 (160.9)	Haywood	80 (128.7)	Robeson	80 (128.7)
Buncombe	80 (128.7)	Henderson	80 (128.7)	Rockingham	70 (112.7)
Burke	70 (112.7)	Hertford	90 (144.8)	Rowan	70 (112.7)
Cabarrus	70 (112.7)	Hoke	70 (112.7)	Rutherford	70 (112.7)
Caldwell	70 (112.7)	Hyde	110 (177.0)	Sampson	90 (144.8)
Camden	100 (160.9)	Iredell	70 (112.7)	Scotland	70 (112.7)
Carteret	110 (177.0)	Jackson	80 (128.7)	Stanley	70 (112.7)
Caswell	70 (112.7)	Johnston	80 (128.7)	Stokes	70 (112.7)
Catawba	70 (112.7)	Jones	100 (160.9)	Surry	70 (112.7)
Cherokee	80 (128.7)	Lee	70 (112.7)	Swain	80 (128.7)
Chatham	70 (112.7)	Lenoir	90 (144.8)	Transylvania	80 (128.7)
Chowan	90 (144.8)	Lincoln	70 (112.7)	Tyrell	100 (160.9)
Clay	80 (128.7)	Macon	80 (128.7)	Union	70 (112.7)
Cleveland	70 (112.7)	Madison	80 (128.7)	Vance	70 (112.7)
Columbus	90 (144.8)	Martin	90 (144.8)	Wake	70 (112.7)
Craven	100 (160.9)	McDowell	70 (112.7)	Warren	70 (112.7)
Cumberland	80 (128.7)	Mecklenburg	70 (112.7)	Washington	100 (160.9)
Currituck	100 (160.9)	Mitchell	70 (112.7)	Watauga	70 (112.7)
Dare	110 (177.0)	Montgomery	70(112.7)	Wayne	80 (128.7)
Davidson	70 (112.7)	Moore	70 (112.7)	Wilkes	70 (112.7)
Davie	70 (112.7)	Nash	80 (128.7)	Wilson	80 (128.7)
Duplin	90 (144.8)	New Hanover	100 (160.9)	Yadkin	70 (112.7)
Durham	70 (112.7)	Northampton	80 (128.7)	Yancey	70 (112.7)
Edgecombe	80 (128.7)	Onslow	100 (160.9)		
Forsyth	70 (112.7)	Orange	70 (112.7)		

Note on the working drawings any anchorages, connectors, inserts, steel sleeves or other such devices used as part of the falsework or formwork that remains in the permanent structure. If the plan notes indicate that the structure contains the necessary corrosion protection required for a Corrosive Site, epoxy coat, galvanize, metallize or otherwise protect these devices as directed by the Engineer. Any coating required by the Engineer will be considered incidental to the various pay items requiring temporary works.

B. Review and Approval

The Engineer is responsible for the review and approval of temporary works' drawings.

Submit the working drawings sufficiently in advance of proposed use to allow for their review, revision (if needed), and approval without delay to the work.

Do not start construction of any temporary work for which working drawings are required until the drawings have been approved. Such approval does not relieve the Contractor of the responsibility for the accuracy and adequacy of the working drawings.

The time period for review of the working drawings does not begin until complete drawings and design calculations, when required, are received by the Engineer.

On the drawings, show all information necessary to allow the design of any component to be checked independently as determined by the Engineer.

If requested by the Engineer, submit with the working drawings manufacturer's catalog data listing the weight of all construction equipment that will be supported on the temporary work. Show anticipated total settlements and/or deflections of falsework and forms on the working drawings. Include falsework footing settlements, joint take-up, and deflection of beams or girders. Falsework hangers that support concentrated loads and are installed at the edge of thin top flange concrete girders (such as bulb tee girders) shall be spaced so as not to exceed 75% of the manufacturer's stated safe working load. Use of dual leg hangers (such as Meadow Burke HF-42 and HF-43) are not allowed. Design the falsework and forms supporting deck slabs and overhangs on girder bridges so that there will be no differential settlement between the girders and the deck forms during placement of deck concrete.

4.0 CONSTRUCTION REQUIREMENTS

All requirements of Section 420 of the Standard Specifications apply.

Construct temporary works in conformance with the approved working drawings. Ensure that the quality of materials and workmanship employed is consistent with that assumed in the design of the temporary works. Do not weld falsework members to any portion of the permanent structure unless approved. Show any welding to the permanent structure on the approved construction drawings.

Provide tell-tales attached to the forms and extending to the ground, or other means, for accurate measurement of falsework settlement. Make sure that the anticipated compressive settlement and/or deflection of falsework does not exceed 1 inch (25 mm). For cast-in-place concrete structures, make sure that the calculated deflection of falsework flexural members does not exceed 1/240 of their span regardless of whether or not the deflection is compensated by camber strips.

A. Maintenance and Inspection

Inspect and maintain the temporary work in an acceptable condition throughout the period of its use. Certify that the manufactured devices have been maintained in a condition to allow them to safely carry their rated loads. Clearly mark each piece so that its capacity can be readily determined at the job site.

Perform an in-depth inspection of an applicable portion(s) of the temporary works, in the presence of the Engineer, not more than 24 hours prior to the beginning of each concrete placement. Inspect other temporary works at least once a month to ensure that they are functioning properly. Have a North Carolina Registered Professional Engineer inspect the cofferdams, shoring, sheathing, support of excavation structures, and support systems for load tests prior to loading.

B. Foundations

Determine the safe bearing capacity of the foundation material on which the supports for temporary works rest. If required by the Engineer, conduct load tests to verify proposed bearing capacity values that are marginal or in other high-risk situations.

The use of the foundation support values shown on the contract plans of the permanent structure is permitted if the foundations are on the same level and on the same soil as those of the permanent structure.

Allow for adequate site drainage or soil protection to prevent soil saturation and washout of the soil supporting the temporary works supports.

If piles are used, the estimation of capacities and later confirmation during construction using standard procedures based on the driving characteristics of the pile is permitted. If preferred, use load tests to confirm the estimated capacities; or, if required by the Engineer conduct load tests to verify bearing capacity values that are marginal or in other high risk situations.

The Engineer reviews and approves the proposed pile and soil bearing capacities.

5.0 REMOVAL

Unless otherwise permitted, remove and keep all temporary works upon completion of the work. Do not disturb or otherwise damage the finished work.

Remove temporary works in conformance with the contract documents. Remove them in such a manner as to permit the structure to uniformly and gradually take the stresses due to its own weight.

6.0 METHOD OF MEASUREMENT

Unless otherwise specified, temporary works will not be directly measured.

7.0 BASIS OF PAYMENT

Payment at the contract unit prices for the various pay items requiring temporary works will be full compensation for the above falsework and formwork.

SUBMITTAL OF WORKING DRAWINGS

(7-12-07)

1.0 GENERAL

Submit working drawings in accordance with Article 105-2 of the Standard Specifications and the requirements of this special provision. For the purposes of this provision, "submittals" refers to only those listed in this provision. The list of submittals contained herein does not represent a list of required submittals for this project. Submittals are only necessary for those items as required by the Standard Specifications, other Special Provisions or contract plans. Make submittals that are not specifically noted in this Special Provision directly to the Resident Engineer. Either the Structure Design Unit or the Geotechnical Engineering Unit or both units will jointly review submittals.

If a submittal contains variations from plan details or specifications or significantly affects project cost, field construction or operations, discuss the submittal with and submit all copies to the Resident Engineer. State the reason for the proposed variation in the submittal. To minimize review time, make sure all submittals are complete when initially submitted. Provide a contact name and information with each submittal. Direct any questions regarding submittal requirements to the Resident Engineer, Structure Design Unit contacts or the Geotechnical Engineering Unit contacts noted below.

In order to facilitate in-plant inspection by NCDOT and approval of working drawings, provide the name, address and telephone number of the facility where fabrication will actually be done if different than shown on the title block of the submitted working drawings. This includes, but is not limited to, precast concrete items, prestressed concrete items and fabricated steel or aluminum items.

2.0 ADDRESSES AND CONTACTS

For submittals to the Structure Design Unit, use the following addresses:

Via US mail:

Mr. G. R. Perfetti, P. E.
State Bridge Design Engineer
North Carolina Department
of Transportation
Structure Design Unit
1581 Mail Service Center
Raleigh, NC 27699-1581

Attention: Mr. P. D. Lambert, P. E.

Via other delivery service:

Mr. G. R. Perfetti, P. E.
State Bridge Design Engineer
North Carolina Department
of Transportation
Structure Design Unit
1000 Birch Ridge Drive
Raleigh, NC 27610

Attention: Mr. P. D. Lambert, P. E.

For submittals to the Geotechnical Engineering Unit, use the following addresses:

For projects in Divisions 1-7, use the following Eastern Regional Office address:

Via US mail:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
1570 Mail Service Center
Raleigh, NC 27699-1570

Via other delivery service:

Mr. K. J. Kim, Ph. D., P. E.
Eastern Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Eastern Regional Office
3301 Jones Sausage Road, Suite 100
Garner, NC 27529

For projects in Divisions 8-14, use the following Western Regional Office address:

Via US mail:

Mr. John Pilipchuk, L. G., P. E.
Western Regional Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
5253 Z Max Boulevard
Harrisburg, NC 28075

Via other delivery service:

Mr. John Pilipchuk, L. G., P. E.
Western Region Geotechnical
Manager
North Carolina Department
of Transportation
Geotechnical Engineering Unit
Western Regional Office
5253 Z Max Boulevard
Harrisburg, NC 28075

Direct any questions concerning submittal review status, review comments or drawing markups to the following contacts:

- Primary Structures Contact: Paul Lambert
(919) 250 – 4041
(919) 250 – 4082 facsimile
plambert@dot.state.nc.us
- Secondary Structures Contacts: James Gaither (919) 250 – 4042
David Stark (919) 250 – 4044
- Eastern Regional Geotechnical Contact (Divisions 1-7):
K. J. Kim
(919) 662 – 4710
(919) 662 – 3095 facsimile
kkim@dot.state.nc.us
- Western Regional Geotechnical Contact (Divisions 8-14):
John Pilipchuk
(704) 455 – 8902
(704) 455 – 8912 facsimile
jpilipchuk@dot.state.nc.us

3.0 SUBMITTAL COPIES

Furnish one complete copy of each submittal, including all attachments, to the Resident Engineer. At the same time, submit the number of hard copies shown below of the same complete submittal directly to the Structure Design Unit and/or the Geotechnical Engineering Unit.

The first table below covers “Structure Submittals”. The Resident Engineer will receive review comments and drawing markups for these submittals from the Structure Design Unit. The second table in this section covers “Geotechnical Submittals”. The Resident Engineer will receive review comments and drawing markups for these submittals from the Geotechnical Engineering Unit.

Unless otherwise required, submit one set of supporting calculations to either the Structure Design Unit or the Geotechnical Engineering Unit unless both units require submittal copies in which case submit a set of supporting calculations to each unit. Provide additional copies of any submittal as directed by the Engineer.

STRUCTURE SUBMITTALS

Submittal	Copies Required by Structure Design Unit	Copies Required by Geotechnical Engineering Unit	Contract Reference Requiring Submittal ¹
Arch Culvert Falsework	5	0	Plan Note, SN Sheet & “Falsework and Formwork”
Box Culvert Falsework ⁷	5	0	Plan Note, SN Sheet & “Falsework and Formwork”
Cofferdams	6	2	Article 410-4
Evazote Joint Seals ⁶	9	0	“Evazote Joint Seals”
Expansion Joint Seals (hold down plate type with base angle)	9	0	“Expansion Joint Seals”
Expansion Joint Seals (modular)	2, then 9	0	“Modular Expansion Joint Seals”
Expansion Joint Seals (strip seals)	9	0	“Strip Seals”
Falsework & Forms ² (substructure)	8	0	Article 420-3 & “Falsework and Formwork”
Falsework & Forms (superstructure)	8	0	Article 420-3 & “Falsework and Formwork”
Girder Erection over Railroad	5	0	Railroad Special Provisions
Maintenance and Protection of Traffic Beneath Proposed Structure	8	0	“Maintenance and Protection of Traffic Beneath Proposed Structure at Station ____”
Metal Bridge Railing	8	0	Plan Note
Metal Stay-in-Place Forms	8	0	Article 420-3
Metalwork for Elastomeric Bearings ^{4,5}	7	0	Article 1072-10

Miscellaneous Metalwork ^{4,5}	7	0	Article 1072-10
Optional Disc Bearings ⁴	8	0	“Optional Disc Bearings”
Overhead Signs	13	0	Article 903-3(C) & Applicable Project Special Provisions
Pile Splicer	7	2	Subarticle 450-7(C)
Placement of Equipment on Structures (cranes, etc.)	7	0	Article 420-20
Pot Bearings ⁴	8	0	“Pot Bearings”
Precast Concrete Box Culverts	2, then 1 reproducible	0	“Optional Precast Reinforced Concrete Box Culvert at Station ____”
Precast Retaining Wall Panels	10	1	Article 1077-2
Prestressed Concrete Cored Slab (detensioning sequences) ³	6	0	Article 1078-11
Prestressed Concrete Deck Panels	6 and 1 reproducible	0	Article 420-3
Prestressed Concrete Girder (strand elongation and detensioning sequences)	6	0	Articles 1078-8 and 1078- 11
Removal of Existing Structure over Railroad	5	0	Railroad Special Provisions
Revised Bridge Deck Plans (adaptation to prestressed deck panels)	2, then 1 reproducible	0	Article 420-3
Revised Bridge Deck Plans (adaptation to modular expansion joint seals)	2, then 1 reproducible	0	“Modular Expansion Joint Seals”
Sound Barrier Wall Casting Plans	10	0	Article 1077-2 & “Sound Barrier Wall”
Sound Barrier Wall Steel Fabrication Plans ⁵	7	0	Article 1072-10 & “Sound Barrier Wall”
Structural Steel ⁴	2, then 7	0	Article 1072-10

Temporary Detour Structures	10	2	Article 400-3 & “Construction, Maintenance and Removal of Temporary Structure at Station _____”
Temporary Shoring ⁸	7	2	“Temporary Shoring”
TFE Expansion Bearings ⁴	8	0	Article 1072-10

FOOTNOTES

1. References are provided to help locate the part of the contract where the submittals are required. References in quotes refer to the Project Special Provision by that name. Articles or subarticles refer to the Standard Specifications.
2. Submittals for these items are necessary only when required by a note on plans.
3. Submittals for these items may not be required. A list of pre-approved sequences is available from the producer or the Materials and Tests Unit.
4. The fabricator may submit these items directly to the Structure Design Unit.
5. The two sets of preliminary submittals required by Article 1072-10 of the Standard Specifications are not required for these items.
6. Submittals for Fabrication Drawings are not required. Submittals for Catalogue Cuts of Proposed Material are required. See Section 5.A of the referenced Project Special Provision.
7. Submittals are necessary only when the top slab thickness is 18 inches or greater.
8. Electronic copies of submittals are required. See referenced Project Special Provision.

GEOTECHNICAL SUBMITTALS

Submittal	Copies Required by Geotechnical Engineering Unit	Copies Required by Structure Design Unit	Contract Reference Requiring Submittal ¹
Crosshole Sonic Logging (CSL) Reports ²	1	0	“Crosshole Sonic Logging”
Drilled Pier Construction Sequence Plans ²	1	0	“Drilled Piers”
Mechanically Stabilized Earth (MSE) Retaining Walls	8	2	“MSE Retaining Walls”
Pile Driving Analyzer (PDA) Reports ²	2	0	“Pile Driving Analyzer”
Pile Driving Equipment Data ³	1	0	Article 450-5
Proprietary Retaining Walls	8	2	Applicable Project Special Provision
Anchored Retaining Walls	8	2	Applicable Project Special Provision
Soil Nail Retaining Walls	8	2	Applicable Project Special Provision
Temporary Mechanically Stabilized (MSE) Earth Wall ²	9	0	“Temporary Shoring”

FOOTNOTES

- References are provided to help locate the part of the contract where the working drawing submittals are required. References in quotes refer to the Project Special Provision by that name. Articles refer to the Standard Specifications.
- Electronic copies of submittals are required. See referenced Project Special Provision.
- Download Pile Driving Equipment Data Form from following link:
<http://www.ncdot.org/doh/preconstruct/highway/geotech/formdet/>
Submit one hard copy of the completed form to the Resident Engineer. Submit a second copy of the completed form electronically, by facsimile or via US Mail or other delivery service to the Geotechnical Engineering Unit. Electronic submission is preferred. See second page of form for submittal instructions.

CRANE SAFETY**(8-15-05)**

Comply with the manufacturer specifications and limitations applicable to the operation of any and all cranes and derricks. Prime contractors, sub-contractors, and fully operated rental companies shall comply with the current Occupational Safety and Health Administration regulations (OSHA).

Submit all items listed below to the Engineer prior to beginning crane operations involving critical lifts. A critical lift is defined as any lift that exceeds 75 percent of the manufacturer's crane chart capacity for the radius at which the load will be lifted or requires the use of more than one crane. Changes in personnel or equipment must be reported to the Engineer and all applicable items listed below must be updated and submitted prior to continuing with crane operations.

CRANE SAFETY SUBMITTAL LIST

- A. **Competent Person:** Provide the name and qualifications of the "Competent Person" responsible for crane safety and lifting operations. The named competent person will have the responsibility and authority to stop any work activity due to safety concerns.
- B. **Riggers:** Provide the qualifications and experience of the persons responsible for rigging operations. Qualifications and experience should include, but not be limited to, weight calculations, center of gravity determinations, selection and inspection of sling and rigging equipment, and safe rigging practices.
- C. **Crane Inspections:** Inspection records for all cranes shall be current and readily accessible for review upon request.
- D. **Certifications:** **By July 1, 2006**, crane operators performing critical lifts shall be certified by NC CCO (National Commission for the Certification of Crane Operators), or satisfactorily complete the Carolinas AGC's Professional Crane Operator's Proficiency Program. Other approved nationally accredited programs will be considered upon request. All crane operators shall also have a current CDL medical card. Submit a list of anticipated critical lifts and corresponding crane operator(s). Include current certification for the type of crane operated (small hydraulic, large hydraulic, small lattice, large lattice) and medical evaluations for each operator.

PILE EXCAVATION**(7-18-06)****1.0 GENERAL**

This special provision governs installing piles using pile excavation in accordance with the plans and as directed by the Engineer. Pile excavation is necessary when piles can not be installed to the required bearing capacity and tip elevation with conventional driving equipment due to vibration concerns or the presence of rock, boulders, debris or very dense

soils. Install piles in accordance with Section 450 of the Standard Specifications and this provision.

2.0 PILE EXCAVATION

Perform pile excavation to the required elevation shown on the plans or otherwise required by the Engineer. Excavate a hole with a diameter that will result in at least 3 in (75 mm) of clearance around the entire pile. Use equipment of adequate capacity and capable of drilling through soil and non-soil including rock, boulders, debris, man-made objects and any other materials encountered. Blasting is not permitted to advance the excavation. Blasting for core removal is only permitted when approved by the Engineer. Dispose of drilling spoils in accordance with Section 802 of the Standard Specifications and as directed by the Engineer. Drilling spoils consist of all excavated material including water removed from the excavation either by pumping or drilling tools.

If unstable, caving or sloughing soils are anticipated or encountered, the Engineer may require the Contractor to stabilize the excavation with steel casing. Steel casing may be either the sectional type or one continuous corrugated or non-corrugated piece. Steel casings should consist of clean watertight steel of ample strength to withstand handling and driving stresses and the pressures imposed by concrete, earth or backfill. Use steel casings with an outside diameter equal to the hole size and a minimum wall thickness of 1/4 in (7 mm).

3.0 CONCRETE PLACEMENT

Before placing concrete, center the pile in the excavation and drive to the required bearing capacity and specified tip elevation, if applicable, as shown on the plans or as directed by the Engineer. Check the water inflow rate in the excavation after any pumps have been removed. If the inflow rate is less than 6 in (150 mm) per half hour, remove any water and free fall the concrete into the excavation. Ensure that concrete flows completely around the pile. If the water inflow rate is greater than 6 in (150 mm) per half hour, propose a concrete placement procedure to the Engineer. The Engineer shall approve the concrete placement procedure before placing concrete.

Fill the excavation with Class A concrete in accordance with Section 1000 of the Standard Specifications except as modified herein. Provide concrete with a slump of 6 to 8 in (150 to 200 mm). Use an approved high-range water reducer to achieve this slump. Place concrete in a continuous manner and remove all casings.

4.0 MEASUREMENT AND PAYMENT

A. Method of Measurement

1. Pile Excavation in Soil

The quantity of "Pile Excavation in Soil" to be paid for will be the linear feet (meters) of pile excavation exclusive of the linear feet (meters) of "Pile Excavation

Not in Soil” computed from elevations and dimensions as shown on the plans or from revised dimensions authorized by the Engineer.

2. Pile Excavation Not in Soil

The quantity of “Pile Excavation Not in Soil” to be paid for will be the linear feet (meters) of pile excavation in non-soil as determined by the Engineer. Non-soil is defined as material that can not be cut with a rock auger and requires excavation by coring, air tools, hand removal or other acceptable methods. Top of non-soil elevation is that elevation where the rock auger penetration rate is less than 2 in (50 mm) per 5 minutes of drilling at full crowd force and coring, air tools, etc. are used to advance the excavation. For pay purposes, after non-soil is encountered, earth seams, rock fragments and voids in the excavation less than 3 ft (0.9 m) in total length will be considered “Pile Excavation Not in Soil”. If the non-soil is discontinuous, payment will revert to “Pile Excavation in Soil” at the elevation where non-soil is no longer encountered.

B. Basis of Payment

1. Pile Excavation in Soil

Payment will be made at the contract unit price per linear foot (meter) for “Pile Excavation in Soil”. Such payment will include, but is not limited to, furnishing all labor, tools, equipment, materials including concrete complete and in place and all incidentals necessary to excavate and complete the work as described in this provision. The cost for the pile will be paid for separately in accordance with the Standard Specifications and will not be part of the unit bid price for “Pile Excavation in Soil”.

2. Pile Excavation Not in Soil

Payment will be made at the contract unit price per linear foot (meter) for “Pile Excavation Not in Soil”. Such payment will include, but is not limited to, furnishing all labor, tools, equipment, materials including concrete complete and in place and all incidentals necessary to excavate and complete the work as described in this provision. The cost for the pile will be paid for separately in accordance with the Standard Specifications and will not be part of the unit bid price for “Pile Excavation Not in Soil”.

SHIPPING STEEL STRUCTURAL MEMBERS

(7-18-06)


Section 1072-23 Marking and Shipping

Add the following paragraphs after the third paragraph of the Section.


Load and ship steel beams and girders in accordance with the Figure below for all types of transportation.

Below is the sketches provided to Materials and Tests Unit on May 8, 1991. When the contractor wishes to place members on trucks not in accordance with these limits, to ship by rail, to attach shipping restraints to the members, to ship horizontally curved steel members, or to invert members, he shall submit a shipping plan prior to shipping. See also Article 1072-11.

LIMITS FOR PLACEMENT OF BEAMS AND GIRDERS DURING SHIPMENT

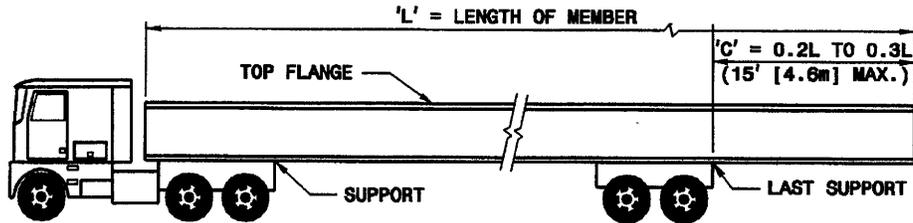

WHEN 'C' = 15' (4.6m) OR LESS

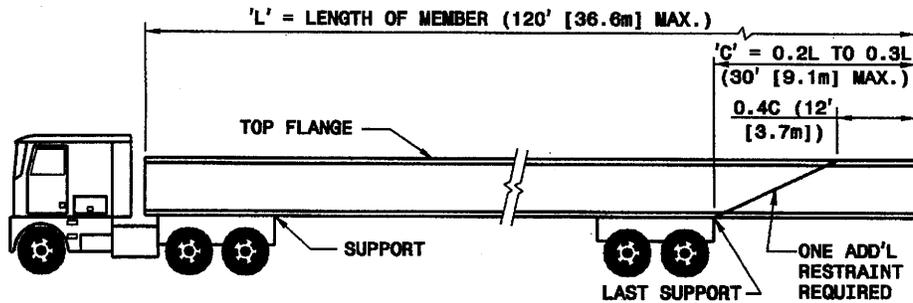

WHEN 'C' = OVER 15' (4.6m) THRU 30' (9.1m)

L	MIN. 'C'	MAX. 'C'
75 (22.9m)	15 (4.6m)	22½ (6.9m)
80 (24.4m)	16 (4.9m)	24 (7.3m)
85 (25.9m)	17 (5.2m)	25½ (7.8m)
90 (27.4m)	18 (5.5m)	27 (8.2m)
95 (29.0m)	19 (5.8m)	28½ (8.7m)
100 (30.5m)	20 (6.1m)	30 (9.1m)
105 (32.0m)	21 (6.4m)	30 (9.1m)
110 (33.5m)	22 (6.7m)	30 (9.1m)
115 (35.1m)	23 (7.0m)	30 (9.1m)
120 (36.6m)	24 (7.3m)	30 (9.1m)

NOTES: ALL DIMENSIONS ARE IN FEET (METERS).
 TRUCK LOADING SHOWN FOR SIMPLICITY
 DIMENSIONS APPLY TO ALL TYPES OF SHIPMENTS.

HIGH STRENGTH BOLTS

(11-17-06)

In Section 440-8(A) of the Standard Specifications, revise the third paragraph and insert a new paragraph four, respectively, as follows:

“Make sure that plain bolts and washers have a thin coat of lubricant at the time of installation.”

“Use nuts that are pre-waxed by the producer/supplier prior to shipping to the project.”

ADHESIVELY ANCHORED ANCHOR BOLTS OR DOWELS

(6-11-07)

1.0 GENERAL

Installation and Testing of Adhesively anchored anchor bolts and dowels shall be in accordance with Section 420-13, 420-21 and 1081-1 of the Standard Specifications except as modified in this provision.

2.0 INSTALLATION

Installation of the adhesive anchors shall be in accordance with manufacturer's recommendations and shall occur when the concrete is above 40 degrees Fahrenheit and has reached its 28 day strength.

The anchors shall be installed before the adhesive's initial set ('gel time').

3.0 FIELD TESTING

Replace the third paragraph of Section 420-13 (C) with the following:

“In the presence of the Engineer, field test the anchor bolt or dowel in accordance with the test level shown on the plans and the following:

Level One Field testing: Test a minimum of 1 anchor but not less than 10% of all anchors to 50% of the yield load shown on the plans. If less than 60 anchors are to be installed, install and test the required number of anchors prior to installing the remaining anchors. If more than 60 anchors are to be installed, test the first 6 anchors prior to installing the remaining anchors, then test 10% of the number in excess of 60 anchors.

Level Two Field testing: Test a minimum of 2 anchors but not less than 10% of the all anchors to 80% of the yield load shown on the plans. If less than 60 anchors are to be installed, install and test the required number of anchors prior to installing the remaining anchors. If more than 60 anchors are to be installed, test the first 6 anchors prior to installing the remaining anchors, then test 10% of the number in excess of 60 anchors.

Testing should begin only after the Manufacturer's recommended cure time has been reached. For testing, apply and hold the test load for three minutes. If the jack experiences any drop in gage reading, the test must be restarted. For the anchor to be deemed satisfactory, the test load must be held for three minutes with no movement or drop in gage reading.”

4.0 REMOVAL AND REPLACEMENT OF FAILED TEST SPECIMENS:

Remove all anchors and dowels that fail the field test without damage to the surrounding concrete. Redrill holes to remove adhesive bonding material residue and clean the hole in accordance with specifications. For reinstalling replacement anchors or dowels, follow the same procedures as new installations. Do not reuse failed anchors or dowels unless approved by the Engineer.

5.0 USAGE

The use of adhesive anchors for overhead installments is not permitted without written permission from the Engineer.

6.0 BASIS OF PAYMENT

No separate measurement or payment will be made for furnishing, installing, and testing anchor bolts/dowels. Payment at the contract unit prices for the various pay items will be full compensation for all materials, equipment, tools, labor, and incidentals necessary to complete the work.

REMOVAL OF EXISTING STRUCTURE AT STA. 16+50.00 -L- (SPECIAL)

Remove the existing structure as indicated on the plans and in accordance with the Standard Specifications with the exception of 16-inch steel I beams, which shall be removed as noted below.

The existing 16-inch steel I beams of the existing structure shall be removed and salvaged for the Division of Highways as directed by the Engineer and store neatly on the right of way at a location selected by the engineer.

The existing 18-inch steel beams will become property of the contractor.

The 16-inch steel I beams shall be removed carefully without any damage.

The Contractor shall contact Ken Anderson at the Marion Bridge Maintenance Yard at 828-652-2939 at least 48 hours prior to the delivery of the salvaged material. The Contractor will deliver the salvaged material on to the Bridge Maintenance Yard. The Bridge Maintenance forces will off load the material.

No separate payment will be made for this work and the entire cost of this work shall be included in the lump sum price bid for "Removal of Existing Structure at Station 16+50.00 -L-".

GABION AND RENO MATTRESS RETAINING WALL

(SPECIAL)

1.0 GENERAL

A. Description

The work in this Special Provision governs the construction of the Gabion and Reno Mattress Retaining Wall in accordance with the details and dimensions shown on the plans and this special provision. The term Gabion and Reno Mattress is used generically in this special provision to refer to any proprietary system able to satisfy this special provision and the contract plans.

Gabions are baskets manufactured from 8x10 double twisted hexagonal woven steel wire mesh, as per ASTM A975-97. Gabions are filled with stones at the project site to form gravity retaining walls. The gabion is divided into cells by diaphragms positioned at approximately 3 foot (0.9 m) centers. To reinforce the structure, all mesh panel edges are selvaged with a wire having a greater diameter. The steel wire used in the manufacture of the Gabions is heavily zinc coated soft temper steel. A Polyvinyl Chloride Coating (PVC) coating is then applied to a nominal thickness of 0.02 inc. (0.50 mm) to provide additional protection.

The Reno mattress is a structure manufactured from 8x10 double twisted hexagonal woven steel mesh, as per ASTM A975-97. Reno mattresses are filled with stones at the project site to form the base of the retaining wall. The reno mattresses extend in front of the retaining wall providing flexible scour protection for the retaining wall. The mattresses are divided into cells by means of diaphragms. Typically, cells are 6 feet (1.9 m) wide by 3 feet (0.9 m) long. To reinforce the structure, all mesh panel edges are selvaged with a wire having a greater diameter. The steel wire used in the manufacture of Reno mattresses is heavily zinc coated, soft temper steel. A PVC coating is then applied to a nominal thickness of 0.02 inc. (0.50 mm) to provide additional protection.

Gabions and reno mattresses are manufactured and shipped with all components mechanically connected at the production facility.

B. Work Experience

Assign a field supervisor with experience on at least three (3) projects of similar scope to this project, completed over the past five (5) years. The on-site foreman must have completed three (3) projects within the last five (5) years involving Gabion and Reno mattress installations of similar scope and size. The Department may suspend the retaining wall construction work if the Contractor substitutes unqualified personnel and the Contractor shall be liable for additional costs resulting from the suspension.

Submit the above experience qualifications list and personnel list for approval by the Engineer prior to wall construction.

C. Preconstruction Meeting

Conduct a retaining wall preconstruction meeting with the field supervisor, the on-site foreman, the Resident Engineer and/or his or her representatives, the Area Roadway Engineer and the Geotechnical Operations Engineer to discuss construction and inspection of the Gabion and Reno Mattress Retaining Wall.

2.0 MATERIALS

All materials are to be as specified or better, and as approved by the Engineer. Submit requests for substitutions to the Engineer 14 days before intended installation. The materials used for the construction of the Gabion and Reno Mattress Retaining Wall must satisfy the following requirements:

A. Wire

Use wire for the manufacture of the gabions, reno mattresses, and lacing wire, that has a maximum tensile strength of 75,000 psi (515 MPa) as per ASTM A641/A641-03. Perform all tests on the wire prior to manufacturing the mesh. Use wire that complies with ASTM A975-97, style 3 coating, galvanized and PVC coated steel wire.

B. Woven Wire Mesh Type 8x10

Use mesh and wire for the manufacture of the gabions and reno mattresses with characteristics that meet the requirements of ASTM A975-97 Table 1., Mesh type 8x10 and PVC coated. The nominal mesh opening, $D = 3.25$ in. (83 mm.) The minimum mesh properties for strength and flexibility should be in accordance with the following:

- 1) A minimum Mesh Tensile Strength of 2,900 lb/ft (42.3 kN/m) when tested in accordance with ASTM A975-97 section 13.1.1 is required
- 2) A minimum Punch Test resistance of 5,300 lb (23.6 kN) when tested in compliance with ASTM A975-97 section 13.1.4 is required.
- 3) A minimum Connection to Selvedges of 1,200 lb/ft (17.5 kN) when tested in accordance with ASTM A975-97 is required.

C. Polyvinyl Chloride Coating (P.V.C.)

The technical characteristics and the resistance of the PVC to aging should meet the relevant standards. The main values for the PVC material are as follows:

- 1) The initial property of the PVC coating shall be in compliance with ASTM A975-97 section 8.2.
- 2) Prior to UV and abrasion degradation, the PVC polymer coating shall have a projected minimum durability of 60 years when tested in accordance with UL 746B *Polymeric Material – Long Term Property Evaluation* for heat aging test.

D. Fabrication at Manufacturing Facility

1) Gabion

Manufacture and ship gabions with all components mechanically connected at the production facility. The front, base, back, and lid of the gabions shall be woven into a single unit. Factory connect the ends and diaphragm(s) to the base. Selvedge all perimeter edges of the mesh forming the basket and top, or lid, with wire having a greater diameter. The gabion is divided into cells by means of diaphragms positioned at approximately 3 foot (1 m) centers. Secure the diaphragms in position to the base so that no additional lacing is necessary at the jobsite.

2) Reno Mattress

Manufacture and ship reno mattresses with all components mechanically connected at the production facility with the exception of the mattress lid, which is produced separately from the base. Form the ends and diaphragm(s) in conjunction with the base. The lid shall be a separate piece made of the same type mesh as the basket. Selvedge all perimeter edges of the mesh forming the basket and top, or lid, with wire having a greater diameter. The Reno mattress is uniformly partitioned into internal cells. Secure the diaphragms in position to the base so that no additional tying is necessary at the jobsite.

3) Lacing Wire

Use lacing wire meeting all of the physical characteristics outlined in Section 2A, 2B, and 2C and having a minimum diameter of 0.127 in. (3.20 mm).

4) Ring Fasteners

Stainless steel ring fastener may be used instead of, or to compliment the lacing wire. Use ring fasteners meeting the requirements of ASTM A975-97 section 6.3. Use ring fasteners with a minimum open dimension of 1.75 in (44 mm), a maximum closed diameter of 0.75 in (19 mm), and a nominal overlap of 1 in. (25 mm) after closure. Do not exceed a spacing of 6 in. (150 mm) for between each ring fastener.

5) Preformed Stiffeners

Preformed stiffeners manufactured for supporting the exposed face of a gabion. The exposed face is any side of a gabion cell that will be exposed or unsupported after the structure is completed.

6) Cross Tie/ Stiffener Wire

Cross tie/stiffener wire may be used instead of, or to compliment the preformed stiffeners. Use cross tie/stiffener wire (lacing wire) meeting all of the physical

characteristics outlined in Sections 2A, 2B, and 2C and having a minimum diameter of 0.127 in. (3.20 mm).

7) **Rock**

The rock for gabions and reno mattresses shall be hard, angular to round, durable and of such quality that they shall not disintegrate on exposure to water or weathering during the life of the structure. Not more than 5 percent by weight of clean spalls resulting from loading and shipment will be allowed in any truckload. The rock may be unwashed quarry material provided it meets all requirements of these special provisions and is placed in conformance with all requirements of the Department's construction permits (including water quality requirements). Prior to construction, submit testing results and certification that all proposed construction materials meet all requirements of the Standard Specifications to the Resident Engineer. The minimum unit weight of the rock shall be 164 pounds per cubic foot (saturated surface dry) and the absorption shall be less than 4 percent. Rock containing organic matter or soft, friable particles in quantities considered objectionable to the Engineer will be rejected. Only crystalline rock obtained by quarrying with the following size limitations will be allowed:

a. Rock for Gabions

Use rock that ranges in dimension from a minimum of 4 in. (0.10 m) to a maximum of 8 in. (0.20 m). The range in sizes shall allow for a variation of 5% oversize and/or 5% undersize stone, provided it is not placed on the gabion exposed surface. The size shall be such that a minimum of three layers of rock must be achieved when filling the gabion.

b. Rock for Reno Mattresses

Use rock that ranges in dimension from a minimum of 3 in. (0.08 m) to a maximum of 5 in (0.13 m). The range in sizes shall allow for a variation of 5% oversize and/or 5% undersize stone, provided it is not placed on the mattress exposed surface. The size shall be such that a minimum of two layers of rock must be achieved when filling the mattress.

3.0 CONSTRUCTION REQUIREMENTS

Use reasonable care in handling, assembling and installing the gabions and reno mattresses to prevent damage including damage to the PVC coating. gabions or reno mattresses damaged will be repaired in a manner satisfactory to the Engineer or replaced at no cost to the Department.

A. Assembly

Gabions and reno mattress are supplied folded flat and packed in bundles. The units are assembled individually by erecting the sides, ends, and diaphragms, ensuring that

all panels are in the correct position, and the tops of all the sides are aligned. First, connect the four corners, followed by the internal diaphragms to the outside walls. Use lacing wire or fasteners, as described in Section 2.0, for all connections.

The procedure for using lacing wire consists of cutting a sufficient length of wire, and first looping and/or twisting to secure the lacing wire to the wire mesh. Proceed to lace with alternating double and single loops through every mesh opening approximately every 6 in (150 mm), pulling each loop tight and finally securing the end of the lacing wire to the wire mesh by looping and/or twisting.

B. Installation

After initial assembly, the gabions and reno mattresses are carried to their final position and are secured joined together along vertical and top edges of their contact surfaces using the same connecting procedure(s) previously described. Whenever a structure requires more than one layer, the upper empty baskets shall also be connected to the top of the lower layer along the front and back edges of the contact surface using the same connecting procedure(s) previously described.

C. Filling Gabions

Fill gabions with rock specified in Section 2.0. During the filling operation some manual rock placement is required to minimize voids. The exposed faces of vertical structures may be carefully hand-placed to give a neat, flat and compact appearance. Care shall be taken when placing fill material to ensure that the sheathing on the PVC coated baskets is not damaged.

Fill the cells in stages so that local deformation is avoided. Do not fill any one cell to a depth exceeding 1 foot (300 mm) higher than an adjoining cell. It is also recommended to slightly overfill the baskets by 1 to 2 in. (25 to 50 mm) to allow for settlement of the rock. Behind gabion walls, compact the backfill material simultaneously to the same level as the filled gabions.

D. Filling Reno Mattresses

Fill reno mattresses with rock specified in Section 2.0. During the filling operation some manual rock placement is required to minimize voids. It is also recommended to slightly overfill the baskets by 1 in. (25 mm) to allow for settlement and so that the rock is tightly confined by the reno mattress lid, thereby minimizing any movement of the rock under hydraulic load. Care shall be taken when placing fill material to ensure that the sheathing on the PVC coated baskets is not damaged.

E. Preformed Stiffeners/Internal Connecting Wires

For gabions, use preformed stiffeners or lacing wire as internal connecting wires when a structure requires more than one layer of gabions to be stacked on top of each other. Connect internal connecting wires to the exposed face of a cell to the adjacent side of the cell. Preformed stiffeners are installed at 45 degree to the face/side of the unit, extending an equal distance along each side to be braced (approximately 1 ft. (300 mm)). Cross tie/stiffener wire (lacing wire) may be used instead of, or to compliment the preformed stiffeners. An exposed face is any side of a gabion cell that will be exposed or unsupported after the structure is completed.

F. 3 Feet (1 m) High Gabions

Fill 3 feet (1 m) gabions in three layers, 1 foot (300 mm) at a time. Install preformed stiffeners/connecting wire after the placement of each layer, that is, at 1 foot (300 mm) high and 2 feet (600 mm) high.

G. 1.5 Feet (0.5 m) High Gabions

1.5 feet (0.5 m) high gabions do not require preformed stiffeners/connecting wire unless the baskets are used to build vertical structures and turned on their side. In some cases, these units shall be filled in two layers, 9 in. (230 mm) at a time. Connecting wires shall be installed after the placement of the first layer, which is 9 in. (230 mm) high.

H. Lid Closing

Once the gabion baskets or reno mattresses are completely full, pull the lids tight until the lid meets the perimeter edges of the basket. A tool such as a lid closer can be used. Tightly lace and/or fasten the lid along all edges, ends, and tops of diaphragm(s) in the same manner previously described.

I. Mesh cutting and folding

Where shown on the plans or other directed by the Engineer, cut the gabion or mattress, fold and fasten together to suit the existing site conditions. Cleanly cut the mesh, fold back the surplus mesh, and neatly wire to an adjacent basket face. Securely fasten the cut edges of the mesh with lacing wire or fasteners in the manner previously described. Assemble, install, fill and close any reshaped gabion or mattress as specified in the previous sections.

4.0 MEASUREMENT AND PAYMENT

Gabion and Reno Mattress retaining walls will be measured and paid for as the actual number of square feet of exposed face area incorporated into the completed and accepted wall. The wall height is measured as the difference between the top and bottom of the wall.

Excavate any material necessary for the instillation of the wall. No separate measurement or payment will be made for this activity. The entire cost of the excavation shall be included in the price bid for Gabion and Reno Mattress retaining wall.

Backfill the wall with Class II Type I select material as shown in the plans. No separate measurement or payment will be made for this activity. The entire cost of the backfilling operation shall be included in the price bid for Gabion and Reno Mattress retaining wall.

The price and payment will be full compensation for all items required to provide the Gabion and Reno Mattress retaining walls including but not limited to those items contained in this special provision.

Payment will be made under:

Gabion and Reno Mattress retaining wallsSquare Foot

FABRIC WALL

(SPECIAL)

Description:

Furnish and install synthetic fabric for a fabric wall in accordance with the Special Provisions and as directed by the Engineer. Maintain the fabric in the required configuration until completion and acceptance of overlying work items. Place the fabric at locations as shown in the plans and as directed by the Engineer. Schedule a preconstruction conference with representatives from the Contractor, Resident Engineer and Geotechnical Engineering Unit to discuss the construction details.

Materials:

Fabric:

The fabric must be composed of strong rot-proof synthetic fibers formed into a fabric of the woven type. The fabric must be free of any treatment or coating which might significantly alter its physical properties after installation. The fabric must contain stabilizers and/or inhibitors to make the filaments resistant to deterioration resulting from ultraviolet or heat exposure. The fabric must be a pervious sheet of synthetic fibers oriented into a stable network so that the fibers retain their relative position with respect to each other. The edges of the fabric must be finished to prevent the outer yarn from pulling away from the fabric. The fabric must be free of defects or flaws which significantly affect its physical and/or filtering properties. Lamination of fabric will not be allowed.

During all periods of shipment and storage, keep the fabric wrapped in a heavy duty protective covering to protect it from direct sunlight, ultraviolet rays, mud, dust, dirt, and debris. Do not expose the fabric to temperatures greater than 140°F (60°C). After the protective wrapping has been removed, do not leave the fabric uncovered under any circumstances for longer than one (1) week.

The fabric must meet the following physical requirements:

All values represent minimum average roll values (any roll in a lot should meet or exceed the minimum values in this table).

<u>Fabric Property</u>	<u>Test Method</u>	<u>Requirements</u>
Wide Width Tensile Strength at 5% Elongation	ASTM D-4595	Warp Direction 100 lb/in. Min. (18 kN/m)
Ultimate Wide Width Tensile Strength	ASTM D-4595	605 lb./in.(Warp) (106 kN/m)
Puncture Strength	ASTM D-4833	130 lbs. Minimum (600 N)
Trapezoid Tear	ASTM D-4533	Warp Direction 100 lb. Minimum (450 N) Fill Direction 100 lb. Minimum (450 N)
Bursting Strength (Mullen)	ASTM D-3786, (Diaphragm Method)	450 psi Minimum (3100 kPa)
AOS, U.S. Std. Sieve	ASTM D-4751	20 min.-70 max.
Permeability	ASTM D-4491	0.02 cm/sec.
Ultraviolet (UV) % Strength Retained	ASTM D-4355	70% Minimum

Furnish certified test reports by an approved independent testing laboratory with each shipment of material attesting that the fabric meets the requirements of this provision; however, the material shall be subject to inspection, test, or rejection by the Engineer at any time.

Select Granular Material:

Furnish and place select granular material over the fabric in accordance with this provision and as directed by the Engineer.

The select granular material must meet the requirements for Class II Type 1 select material as defined in Article 1016-3 of the North Carolina Department of Transportation Specifications for Roads and Structures.

Construction Methods:

Excavate any material necessary for the installation of the wall. No separate measurement or payment will be made for this activity. The entire cost of the excavation shall be included in the price bid for "Fabric Wall".

Place the fabric at locations as shown on the plans or as directed. The excavated surface must be free of obstructions, debris, pockets, stumps, and cleared of all vegetation.

At the time of installation, the fabric will be rejected if it has defects, rips, holes, flaws, deterioration or damage incurred during manufacture, transportation, or storage.

Lay the fabric smooth and free from tension, stress, folds, wrinkles or creases. Place fabric sheets perpendicular to the face of the wall. No splices will be allowed parallel to the wall face. Overlap adjacent sheets of fabric a minimum of 18 inches (450 mm). Adjacent panels may be seamed with the seam oriented perpendicular to the wall face. Seam strength shall be no less than the required strength in the fill direction - ASTM D-4884.

Should the fabric be torn or punctured, or the overlaps disturbed as evidenced by visible fabric damage, subgrade pumping, intrusion, or distortion, remove the backfill around the damaged or displaced area and repair or replace the damaged fabric at no cost to the Department. The repair must consist of a patch of the same type of fabric which replaces the ruptured area. Remove all fabric within 12 inches (300 mm) of the ruptured area or from the smooth fabric edge in such a way as to not cause additional ripping or tearing. The patch must be sewn onto the fabric.

Compact the select granular material to a dry density of 95% of the maximum dry density determined in accordance with AASHTO T99 as modified by the Department. Compaction within 3 feet (1 meter) of the wall face must be performed with light compaction equipment such as mechanical tampers and vibro plates. Every effort shall be made to avoid damaging the fabric when placing and compacting the backfill material. Heavy equipment must not be allowed to operate on the fabric until it is covered with 12 inches (300 mm) of backfill material. End dumping fill directly on the fabric will not be permitted. Do not use sheepsfoot rollers or other rollers with protrusions, as well as vibratory rollers, over the fabric.

Temporary support forms at the wall face will be required for each layer to allow compaction of the backfill material against the vertical face of the fabric. Each subsequent layer

of fabric and backfill material must be offset back only that amount required to construct the wall face.

Maintain the embankment fill height consistent with the fabric wall as it is brought up.

Backfill the wall with Class II select material as shown in the plans. No separate measurement or payment will be made for this activity. The entire cost of the backfilling operation shall be included in the price bid for "Fabric Wall".

Method of Measurement:

The quantity of fabric wall to be paid for will be the actual number of square feet (square meters) of the exposed face measured from the bottom of the excavation to the top of the wall

Basis of Payment:

The quantity of fabric, measured as provided above will be paid for at the contract unit price per square feet (square meter) of "Fabric Wall". Such price and payment shall be full compensation for all the work covered by this provision including, but not limited to excavating material, furnishing materials, and installing the wall.

Payment will be made under:

"Fabric Wall".....Square feet

CHIPPED WASTE TIRES:

(SPECIAL)

1.0 DESCRIPTION

Place chipped waste tires in the annulus between the end bent cap and fabric wall to be constructed at End Bent No. 1.

2.0 MATERIAL

The material shall be chipped waste tires. Ninety-nine percent by volume of the chipped waste tires shall be 3 inches or less in size, measured in any direction, and 90% of the chipped waste tires, by volume, shall not have exposed wire extending more than 1/4" beyond any surface of the chip. The presence of loose wires shall be minimized by the Contractor to the extent deemed practical by the Engineer. The tire chips shall be free of any contaminates such as oil, grease, etc. that could leach into the ground water. The material that accumulates around shredding machinery and associated conveyor belts (fine steel cord wire, soil, etc.) should not be mixed with the shreds. All tire material shall be processed from scrap tires taken from within North Carolina.

The Contractor shall be responsible for securing all necessary permits, which may be required for the transport and storage of chipped tire material, from the North Carolina Department of Environment, Health and Natural Resources, Solid Waste Management Section.

3.0 CONSTRUCTION METHODS

Do not place chipped tires until after the completion of the end bent cap and the fabric wall. Place the chipped tires in the annulus between the end bent cap and the fabric wall in a manner to minimize voids. Compaction is not required.

4.0 METHOD OF MEASUREMENT

The quantity of chipped tires to be paid for will be the actual number of cubic yards of approved material, measured in trucks, which has been delivered and incorporated into the completed and accepted work. Each truck will be measured by the Engineer and shall bear a legible identification mark indicating its capacity. Each truck shall be loaded to at least its measured capacity at the time it arrives at the point of delivery. No reduction will be made for voids when making truck measurements.

5.0 BASIS OF PAYMENT

The quantity of chipped tire material measured and provided in Section 4.0 above will be paid for at the contract unit price per cubic yard for "Chipped Tire Material."

Payment for the chipped tires shall be full compensation for furnishing and placing the chipped tires to minimize voids.

Payment will be made under:

Chipped Tire MaterialCubic Yards

PILE/PANEL WALL

(SPECIAL)

The Contractor shall construct a pile and precast concrete panel wall at the locations indicated in the plans and in accordance with the details in plans, the following special provision and as directed by the Engineer.

A pile/panel retaining wall preconstruction conference shall be scheduled with the Contractor including the drilling superintendent, the Resident Engineer including the inspector, the Area Bridge Construction Engineer and the Regional Geotechnical Operations Engineer to discuss construction and inspection of the pile/panel wall. This conference shall be completed a minimum of 5 days prior to beginning any work.

Steel Piles

HP steel piles shall conform to the applicable parts of the Standard Specifications and these provisions. All steel piles shall meet the requirements of Section 1084 in the 2006 NCDOT Standard Specifications for Roads and Structures. The size and locations of piles shall be as shown in the plans.

The piles shall be installed to grade using the lengths and cut off elevations shown in the plans by pre-augering or drilling a 30-inch minimum diameter hole for the HP 14 X 73 steel piles. The hole shall be backfilled with concrete up to the bottom of the concrete leveling pad.

Where the alignment of the wall is curved, the piles shall be laid out on chords and aligned such that their flanges are tangent to the curve at the web.

Piles shall be installed to within 2 inches of their plan location and the center to center distance between piles shall not differ from the plans by more than 3 inches after installation.

The plumbness of the piles shall not vary from the vertical by more than 1/8 inch per foot. In general, installed piles will be acceptable if the precast concrete panels, when installed, have an acceptable appearance without significant gaps between the face of the panels and the pile flanges. The precast concrete panels shall have a minimum 2 inch bearing on the pile flanges.

Splicing of piles is subject to the Engineer's approval and shall be in accordance with the plans. Splices will not be permitted in the portion of the pile that is permanently exposed. Welding shall conform to the requirements of Article 1072-20 of the Standard Specifications.

Precast Concrete Panels

Concrete materials for precast panels shall conform to the applicable parts of the Standard Specifications and these special provisions.

Concrete for the precast panels shall have a minimum 28-day compressive strength of 4,500 psi. The panels shall not be removed from the forms until the concrete has attained sufficient strength to prevent damage. Cracked, spalled or discolored panels shall be rejected.

The exposed face of the concrete panels shall have a vertical broomed finish. The side of the panels shall be plumb and have a minimum bearing distance of 2 inches. 1/2" thick expansion joint material shall be placed between the panels and pile flanges for the width of the bearing surface. The panels shall be seated firmly on the cushioning material and shall be held securely against the pile flange until the backfill is placed sufficiently to hold the panels in place.

C.I.P. Coping

The work covered by this provision consists of the construction of portland cement concrete coping in accordance with the details in the plans and the following provisions.

- (1) Concrete shall be Class A conforming to the applicable requirements of Sections 420 and 1000 of the Specifications.
- (2) Reinforcing steel in the coping shall conform to the applicable requirements of Sections 425 and 1070 of the Specifications.

Expansion joints are allowed on 30 foot centers, construction joints may be used where the coping changes slopes and at 90 foot centers, and contraction joints are allowed on 10 foot centers.

Shaft Excavation and Concrete

Shaft excavation shall conform to the applicable provisions of Section 410 of the Standard Specifications. The shaft concrete shall be a drilled pier mix meeting the requirements of Section 1000 of the Standard Specifications.

The shaft, as shown in the plans, shall be excavated by drilling, augering or coring to a depth sufficient to set the full length of steel pile to grade, and shall be constructed in accordance with Section 825 of the Standard Specifications. If rock is encountered during drilling or pre-augering as determined by the Engineer, the pile tip elevation may be raised if a rock socket at least 5 foot in length is maintained. Shaft concrete shall be cast against undisturbed ground unless otherwise permitted by the Engineer. All loose and soft material shall be removed and the excavation dewatered immediately before and during the concrete casting operation. The top of the concrete shafts shall be generally level.

If necessary, special measures shall be taken to insure the stability of the shaft such as installing temporary casings prior to drilling, installing the pile and placing concrete immediately after a shaft is excavated before caving occurs, installing well points or other measures. If caving occurs, the shaft excavation operation shall be halted until special measures are implemented.

Concrete panels shall not be installed before the shaft concrete has cured for a minimum of 3 days.

Excavation and Backfill

Where necessary for safety, the excavation shall be sloped or shored in accordance with local and state safety standards. However, the Contractor may elect to use alternate methods of providing a safe excavation provided the methods are submitted to the Engineer for review and acceptance.

Excavate any material necessary for the installation of the wall. No separate measurement or payment will be made for this activity. The entire cost of the excavation shall be included in the price bid for "Pile/Panel Wall".

Measurement and Payment

The quantity of pile/panel walls to be paid for will be the actual number of square feet of precast concrete panels which have been incorporated into the completed and accepted pile/panel wall. Measurement shall be made horizontally and vertically from outside edge to outside edge.

The quantity of pile/panel wall, measured as provided above, will be paid for at the contract unit price per square foot for "Pile/Panel Wall".

The 14 x 73 steel piles shall not be included in this pay item. For payment of these piles see Bridge Plans.

The shaft excavation shall not be included in this pay item. For payment of this excavation, see bridge plans.

Such price and payment shall be full compensation for all work covered by this provision including but not limited to furnishing and placing all steel angles, support plates, bolts, nuts, washers, precast concrete panels, furnishing and placing CIP concrete leveling pad, construction of C.I.P. coping, and all other incidental work and materials necessary to construct the pile/panel walls.