WK DICKSON 3101 John Humphries Wynd Raleigh, NC 27612 (919) 782-0495	PROJECT REFERENCE NO. 39417	SHEET NO. PM-1
	R/W SHEET NO.	
	TRAFFIC DESIGN ENGINEER	HYDRAULICS ENGINEER

NORTH CAROLINA PROFESSIONAL SEAL 028392 ENGINEER CLINTON T. REGENER

2/11/08

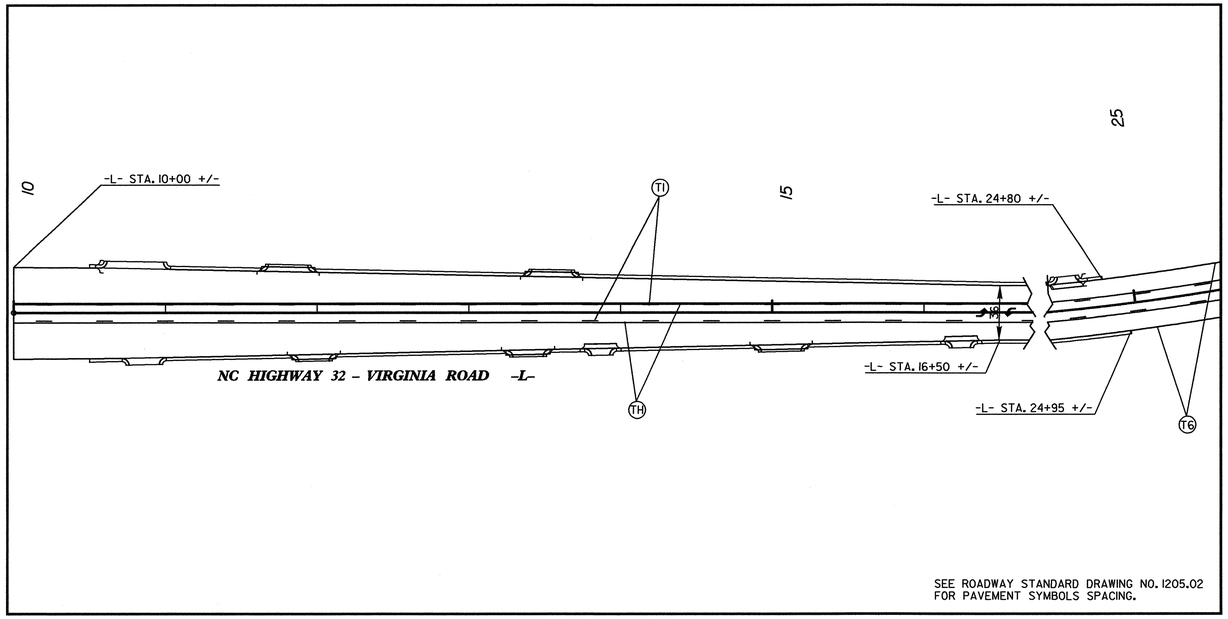

SEE ROADWAY STANDARD DRAWING NO. 1205.02 FOR PAVEMENT SYMBOLS SPACING.

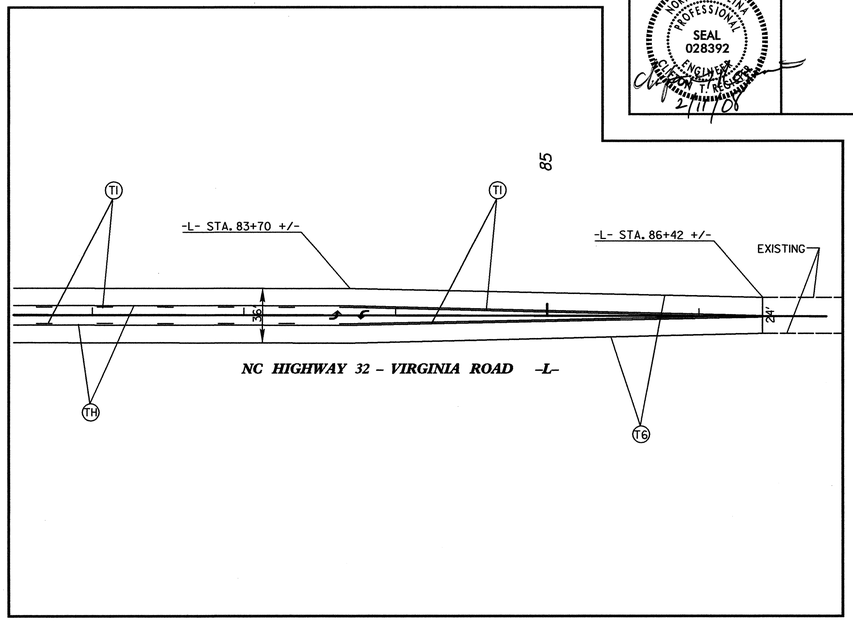

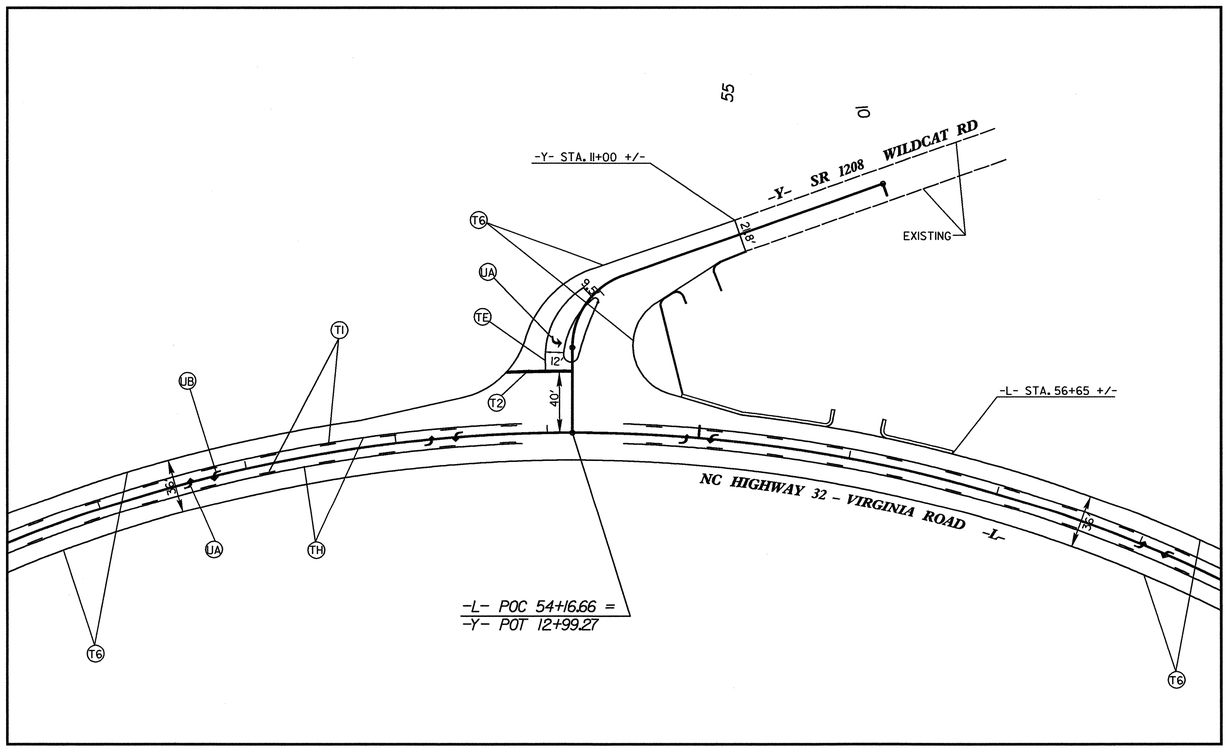

PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN		TOTAL QUANTITY		
		PAVEMENT MARKING LINES				
		THERMOPLASTIC (4", 90 mils)				
TA	WHITE EDGELINE	12,414	LF			
				TOTAL	12,414	LF
		THERMOPLASTIC (4", 120 mils)				
TE	WHITE SOLID LANE LINE	26	LF			
TF	10' FT. YELLOW SKIP	3,655	LF			
TH	YELLOW SINGLE CENTER	14,620	LF			
TI	YELLOW DOUBLE CENTER LINE	1,088	LF			
				TOTAL	19,389	LF
		THERMOPLASTIC (24", 120 mils)				
T2	WHITE STOPBAR	45	LF			
				TOTAL	45	LF
		THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MILS)				
UA	LEFT TURN ARROW	22	EA.			
UB	RIGHT TURN ARROW	21	EA.			
				TOTAL	43	EA.
		PAINT (4")				
PA	WHITE EDGELINE (IX	12,414	LF			
PE	WHITE SOLID LANE LINE (IX)	26	LF			
PF	10 FT. YELLOW SKIP (IX)	3,655	LF			
PH	YELLOW SINGLE CENTER (IX)	14,620	LF			
PI	YELLOW DOUBLE CENTER (IX)	1,088	LF			
				TOTAL	31,803	LF
		PAINT (24")				
P4	WHITE STOPBAR	45	LF			
				TOTAL	45	LF
		PAINT MARKING SYMBOLS				
QA	LEFT TURN ARROW (IX)	22	EA			
QB	RIGHT TURN ARROW (IX)	21	EA			
				TOTAL	43	EA

8/17/99

$$$$$$$$SYSTIME$$$$$$$$
$$$$$$$$DGN$$$$$$$$
$$$$$$$$USERNAME$$$$$$$$