


**TO BE USED ON RAMPS
PAVE ALL THE WAY UP ON RAMPS AT EXIT'S
75,81,83 AND 85**

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
D1	PROP. APPROX. 2½" ASPHALT CONCRETE SURFACE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
T	EARTH MATERIAL
Z1	MILL 2½" OVER ENTIRE ROADWAY WIDTH
Z2	MILL 2" OVER WIDTH OF PAVED SHOULDER AT VARIOUS LOCATIONS AS DIRECTED BY THE ENGINEER

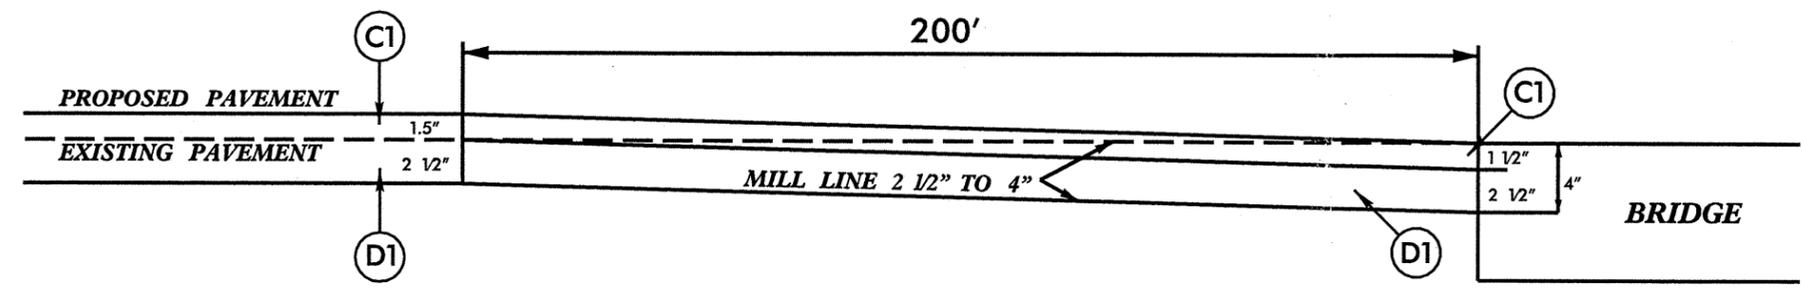

BRIDGE APPROACH DETAIL

MCDOWELL COUNTY

PROJECT NO.	SHEET NO.	TOTAL NO.
I-4908BB	3	
39972.3.2		

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	LENGTH MI	WIDTH FT	SHOULDER RECONSTRUCTION SMI	2" MILLING SY	2½" MILLING SY	INTERMEDIATE COURSE, 119.0C TONS	SURFACE COURSE, S9.5C TONS	PG 64-22 PLANT MIX TONS	PG 70-22 PLANT MIX TONS	PATCHING EXISTING PAVEMENT TONS	MILLED RUMBLE STRIPS LF
I-4908BB	McDowell	1	I-40 EB	MP 74.36 TO MP 86.62	1 & 1A	12.26	24	28.28	2,424	172,621	27,058	27,975	1,272	1,679	4,332	129,466
		2	I-40 WB	MP 74.36 TO MP 86.62	1 & 1A	12.26	24	28.18	3,444	172,621	27,058	27,819	1,272	1,669	4,332	129,466
TOTAL FOR PROJ NO. I-4908BB						24.52		56.46	5,868	345,242	54,116	55,794	2,544	3,348	8,664	258,932
GRAND TOTAL						24.52		56.46	5,868	345,242	54,116	55,794	2,544	3,348	8,664	258,932

THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	4688000000-E	4690000000-E	4700000000-E	4710000000-E	4725000000-E	4810000000-E		4825000000-E	4835000000-E	4845000000-E	4905000000-N	
					6" X 90 M YELLOW THERMO LF	6" X 90 M WHITE THERMO LF	6" X 120 M WHITE THERMO LF	12" X 90 M WHITE THERMO LF	24" X 120 M WHITE THERMO LF	THERMO SYMBOL EA	4" WHITE PAINT LF	4" YELLOW PAINT LF	12" WHITE PAINT LF	24" WHITE PAINT LF	PAINT SYMBOL EA	SNOW PLOWABLE MARKERS EA
I-4908BB	McDowell	1	I-40 EB	MP 74.36 TO MP 86.62	74,395	74,395	16,183	4,904	96	4	180,000	150,000	9,800	192	4	810
		2	I-40 WB	MP 74.36 TO MP 86.62	74,660	74,660	16,183	4,904	96	4	180,000	150,000	9,800	192	4	810
TOTAL FOR PROJ NO. I-4908					149,055	149,055	32,366	9,808	192	8	360,000	300,000	19,600	384	8	1,620
GRAND TOTAL					149,055	149,055	32,366	9,808	192	8	360,000	300,000	19,600	384	8	1,620

