

04-MAY-2009 14:16
p:\pprojects-b\3677\signing\cadd\pmp\B-3677_Sgn_PMP_1.dgn
walter.johnson AT 1E221737

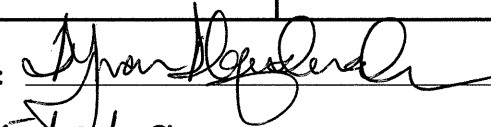

T.I.P.: B-3677

CONTRACT: C201969

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
MECKLENBURG COUNTY

LOCATION: BRIDGE No. 36 OVER IRVINS CREEK ON SR 3135
(LEBANON RD)

TIP NO.	SHEET NO.
B-3677	PMP-1
APPROVED: 	
DATE: 5/3/09	
SEAL	
	

ROADWAY STANDARD DRAWINGS

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.09	PAVEMENT MARKINGS - PAINTED ISLANDS
1205.12	PAVEMENT MARKINGS - BRIDGES
1250.01	PAVEMENT MARKER SPACING
1251.01	RAISED PAVEMENT MARKERS - TEMPORARY AND PERMANENT
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
SR 3135 LEBANON RD	THERMOPLASTIC	PERMANENT RAISED
- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
- C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
- D) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

Ayman I Alqudwah, P.E. SIGNING & DELINEATION REGIONAL ENGINEER
Derrick Beard SIGNING & DELINEATION DESIGN ENGINEER

INDEX

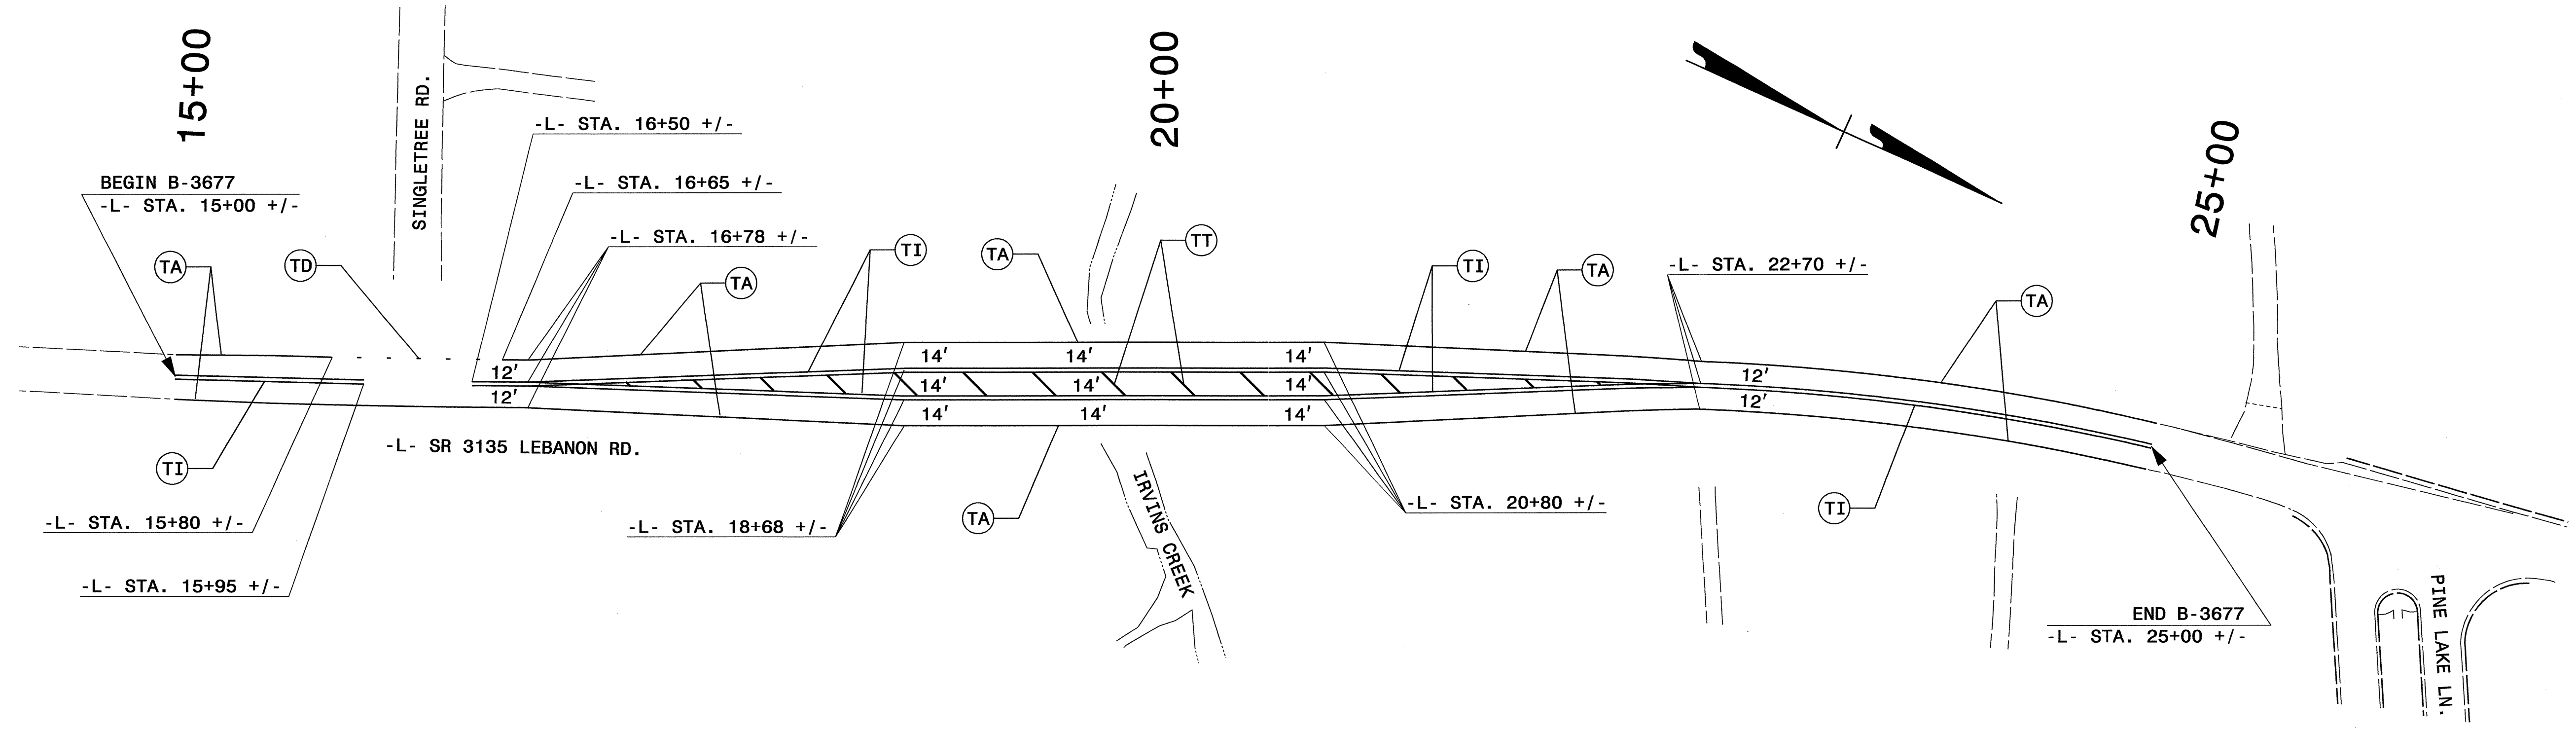
SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN COVER SHEET
PMP-2	PAVEMENT MARKING SCHEDULE AND PAVEMENT MARKING DETAIL

TIP NO.	SHEET NO.
B-3677	PMP-2
APPROVED: <i>[Signature]</i>	
DATE: 4/28/09	
SEAL	



B-3677 PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY	TOTAL
FINAL PAVEMENT MARKINGS			
THERMOPLASTIC (4", 120 MILS)			
TD	2 FT. WHITE MINISKIP	11 LF	
TI	YELLOW DOUBLE CENTER	3076 LF	
		TOTAL	3087 LF
THERMOPLASTIC (4", 90 MILS)			
TA	WHITE EDGELINE	1915 LF	
		TOTAL	1915 LF
THERMOPLASTIC (8", 90 MILS)			
TT	YELLOW DIAGONAL	180 LF	
		TOTAL	180 LF
MARKERS			
PERMANENT RAISED PAVEMENT MARKERS			
MA	YELLOW & YELLOW	35 EA	
		TOTAL	35 EA



PAVEMENT MARKING SCHEDULE AND PAVEMENT MARKING DETAIL

28-APR-2009 11:51
 C:\prip\proj\105-b-3677\tr\off\ic\signing\codd\pmp\B-3677_SgnL_PMP_2.dgn
 Walter Johnson AT 1122137