


R-10306 - WAYNE COUNTY

34363.3.17



COUNTY

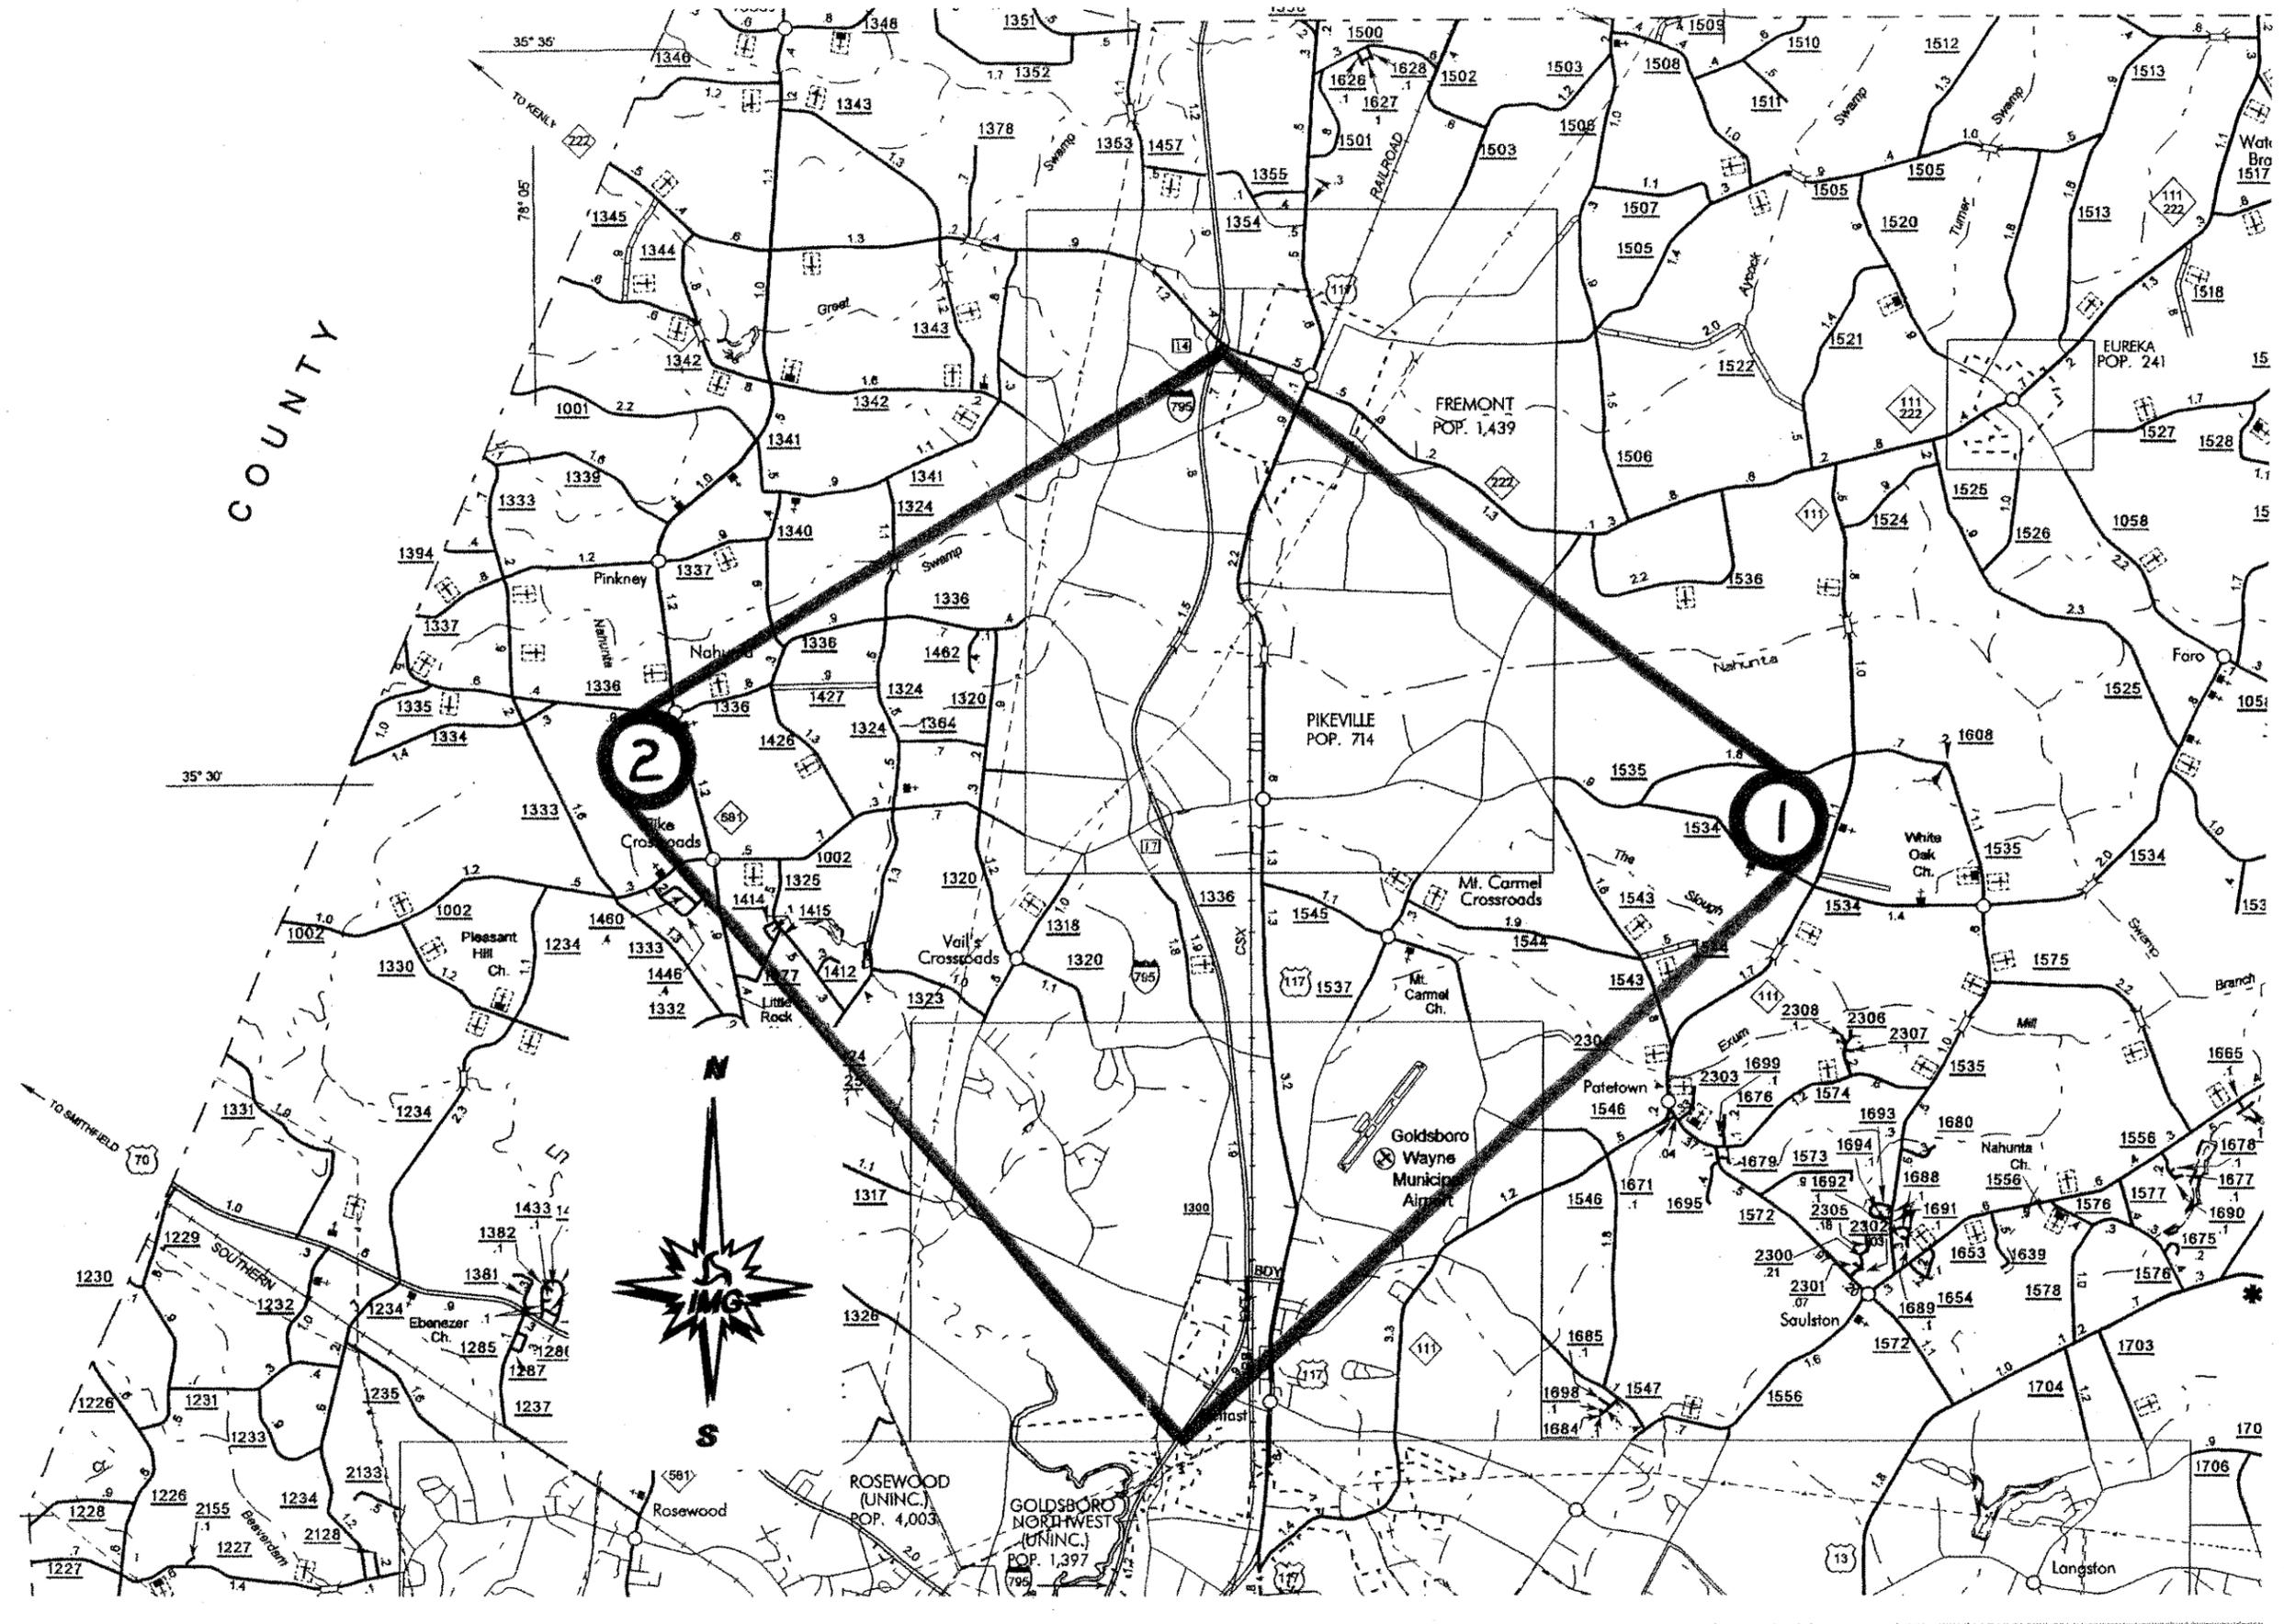

2

1

FREMONT
POP. 1,439

PIKEVILLE
POP. 714

ROSEWOOD
(UNINC.)
POP. 4,003

GOLDSBORO
NORTHWEST
(UNINC.)
POP. 1,397

Goldsboro
Wayne
Municipal
Airport

EUREKA
POP. 241

Langston

TO SMITHFIELD
70

35° 30'

35° 36'

78° 05'

TO SAULSTON
13

PROJECT NO.	SHEET NO.	TOTAL NO.
R-1030G (34363.3.17)	3	3

SUMMARY OF QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	TYP NO	FINAL SURFACE TESTING REQUIRED	LENGTH MI	WIDTH FT	SHOULDER CONSTRUCTION SMI	3" MILLING SY	INTER-MEDIATE COURSE, 119.0C TONS	SURFACE COURSE, S9.5C TONS	PG 64-22 PLANT MIX TONS	PG 70-22 PLANT MIX TONS	MILLED RUMBLE STRIPS LF	SEED & MULCHING AC
R-1030 (34363.3.17)	Wayne	1	I-795 NB	NORTH OF SR 1300 (SALEM CHURCH RD) TO NC 222	1	YES	9.05	38	9.05	56,000	10,500	45,000	494	2,700	95,568	6.60
				TOTAL FOR MAP NO. 1			9.05		9.05	56,000	10,500	45,000	494	2,700	95,568	6.60
	2	I-795 SB	NC 222 TO NORTH OF SR 1300 (SALEM CHURCH RD)	1	YES	9.05	38	9.05	44,000	8,200	45,000	385	2,700	95,568	6.60	
			TOTAL FOR MAP NO. 2			9.05		9.05	44,000	8,200	45,000	385	2,700	95,568	6.60	
TOTAL FOR PROJ NO. R-1030G (34363.3.17)							18.1		18.1	100,000	18,700	90,000	879	5,400	191,136	13.20
GRAND TOTAL							18.1		18.1	100,000	18,700	90,000	879	5,400	191,136	13.20

THERMOPLASTIC AND PAINT QUANTITIES

PROJECT NO	COUNTY	MAP NO	ROUTE	DESCRIPTION	4405000000-E	4415000000-N	4420000000-N	4430000000-N	4480000000-N	4688000000-E	4688000000-E	4690000000-E	4700000000-E	4725000000-E	4815000000-E	4845000000-N	4900000000-N	
					PORTABLE WORK ZONE SIGN SF	FLASHING ARROW PANELS, TYPE C EA	CHANGEABLE MESSAGE SIGN EA	DRUMS EA	TMIA EA	6" X 90 M WHITE THERMO LF	6" X 90 M YELLOW THERMO LF	6" X 120 M WHITE THERMO LF	12" X 90 M WHITE THERMO LF	THERMO STR ARROW 90 M EA	6" WHITE PAINT LF	6" YELLOW PAINT LF	PAINT STR ARROW EA	CRYSTAL & RED MARKERS EA
R-1030 (34363.3.17)	Wayne	1	I-795 NB	NORTH OF SR 1300 (SALEM CHURCH RD) TO NC 222	300	1	1	150	1	47,784	47,784	11,946	1,500	9	59,730	47,784	9	679
				TOTAL FOR MAP NO. 1	300	1	1	150	1	47,784	47,784	11,946	1,500	9	59,730	47,784	9	679
	2	I-795 SB	NC 222 TO NORTH OF SR 1300 (SALEM CHURCH RD)	300	1	1	150	1	47,784	47,784	11,946	1,500	9	119,460	47,784	9	679	
			TOTAL FOR MAP NO. 2	300	1	1	150	1	47,784	47,784	11,946	1,500	9	119,460	47,784	9	679	
TOTAL FOR PROJ NO. R-1030G (34363.3.17)					600	2	2	300	2	95,568	95,568	23,892	3,000	18	179,190	95,568	18	1,358
GRAND TOTAL					600	2	2	300	2	95,568	95,568	23,892	3,000	18	179,190	95,568	18	1,358