


Prepared by:  
 Rummel, Klepper & Kahl, LLP  
 Consulting Engineers  
 900 Ridgefield Drive, Suite 350  
 Raleigh, NC 27609  
 Phone: (919) 878-9560  
 Fax: (919) 790-8382

Project: 41797  
 County: Wake

August 27, 2009

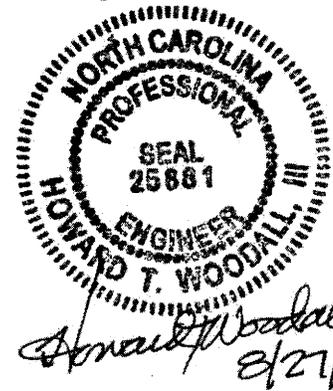

**PROJECT SPECIAL PROVISIONS**  
**Sanitary Sewer Construction**

I. GENERAL CONSTRUCTION REQUIREMENTS

Specifications:

The proposed utility construction shall meet the applicable requirements of the North Carolina Department of Transportation "Standard Specifications for Roads and Structures" dated July 2006, the City of Raleigh Standards and Specifications, details shown on the plans, and the following provisions.

Owner and Owner's Requirements:

The existing sewer facilities belong to the City of Raleigh, North Carolina. The Contractor shall provide access for the owner's representatives during all phases of construction. The Public Works Department and Public Utilities Department shall be notified at the phone numbers listed on plan sheet UC-3, at least twenty-four (24) hours prior to commencement of any work.

Contractor shall conform to the notifications and requirements noted in the plans. By-pass operation requirements are specified on plan sheet U-3.

Existing sanitary sewer facilities and related appurtenances which are removed shall become property of the Contractor, and the Contractor shall properly dispose of these items.

All sewer line and manhole test results shall be provided to the City. Any cracked, damaged, or defective pipe, fittings, manholes, covers, or other attachments discovered as a result of the pressure test, shall be removed and replaced with sound material. The tests shall be repeated until test results are satisfactory.

#### Utility Locations Shown on the Plans:

The locations, sizes, and type material of the existing utilities shown on the plans are from the best available information. The contractor will be responsible for determining the exact location, size, and type of material of the existing facilities necessary for the construction of the proposed utilities and to avoid damage to existing facilities.

#### Open Cut Installation:

All sewer line construction performed using open cut installation within or adjacent to traffic shall have the final approved traffic control measures in place prior to beginning any open cut installation. No utility work on this project is anticipated to be adjacent to traffic.

## II. COMPENSATION

No direct payment shall be made for the utility construction work required by the preceding provisions, which are general requirements applying to sanitary sewer construction, and all of the requirements stated will be considered incidental work, paid for at the previously agreed unit prices.

PROJECT: 30000.14.3  
COUNTY: Wake

PROJECT SPECIAL PROVISIONS  
Utility

UTILITIES BY OTHERS:

General:

The following utility company has planned facilities that will be in conflict with the construction of this project:

Progress Energy (Power)

The conflicting facilities are listed in these special provisions for the benefit of the Contractor. All utility work listed herein will be done by the utility owners. All utilities are shown on the plans from the best available information.

The Contractor's attention is directed to Article 105.8 of the Standard Specifications.

Utilities Requiring Adjustment:

Progress Energy (Power)

Progress Energy will need 2 weeks notice prior to completion of rough grading and one week upon completion of rough grading to install their facilities crossing -Y- near Station 22+20 (see Plan Sheet 6). The contact for Progress Energy is David Pearce, and he can be reached at 919-881-3718 or 919-881-3772.