

TIP NO.	SHEET NO.
B-3919	SIGN-1
APPROVED: _____	
DATE: _____	
SEAL	

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLANS
WAKE COUNTY**

LOCATION: BRIDGE NO. 448 OVER AUSTIN CREEK AND BRIDGE NO. 140 OVER SMITHS CREEK AND APPROACHES ON SR 2053 (JONES DAIRY RD.)

T.I.P.: B-3919

CONTRACT: C202232

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING OR PAVEMENT MARKINGS. SEE TRAFFIC CONTROL PLANS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL.....	120	L.F.
4102000000	904	SIGN ERECTION, TYPE E.....	7	EA.
4116100000	904	SIGN ERECTION, RELOCATE SIGN TYPE D.....	2	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL.....	17	EA.
4192000000	907	DISPOSAL OF SUPPORT, U-CHANNEL.....	1	EA.

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	SIGNING TITLE SHEET, GENERAL NOTES, ROADWAY STANDARD DRAWINGS, SUMMARY OF QUANTITIES
SIGN-2	E SHEETS
SIGN-3 and 4	SIGN ROADWAY SHEETS, PAY ITEM NOTES


PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION SECTION

RON KING, P.E. STATE SIGNING & DELINEATION ENGINEER
GEORGE TERLIZZI SIGNING & DELINEATION DESIGN ENGINEER


APPROVED: _____

DATE: _____

SEAL

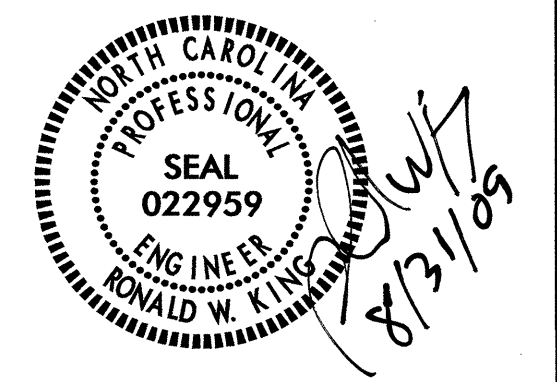


401 QUANTITY REQ'D 1

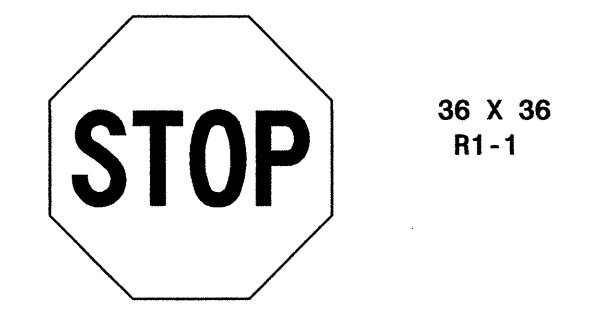


ONE "U" POST PER SIGN

402 QUANTITY REQ'D 1

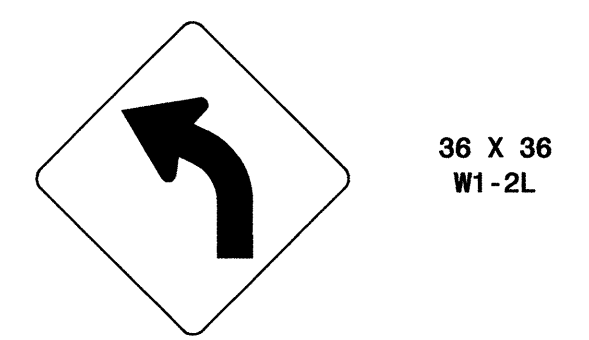


ONE "U" POST PER SIGN

403 QUANTITY REQ'D 1

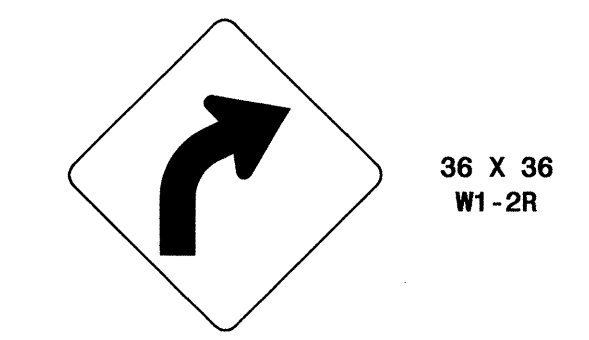


ONE "U" POST PER SIGN

404 QUANTITY REQ'D 2

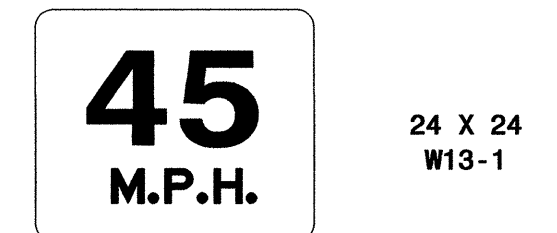

MOUNT BELOW SIGN 402.
IN .1. INSTALLATIONS
MOUNT BELOW SIGN 403.
IN .1. INSTALLATIONS

405 QUANTITY REQ'D 2



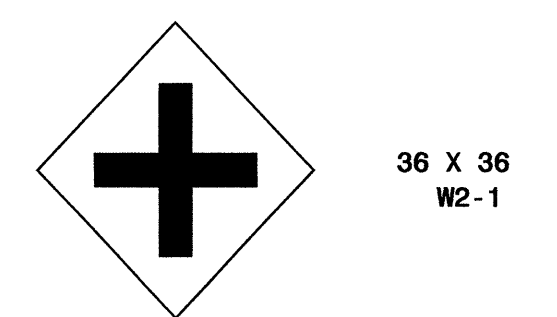


ONE "U" POST PER SIGN

TYPE "E" SIGNS

25-AUG-2009 11:32
 pt:\p\proj\0315-11-0315\traffic\signing\cadd\signing layout plans\engseed.dgn
 gberlizz1 AL 11/22/05

APPROVED: _____
 DATE: _____

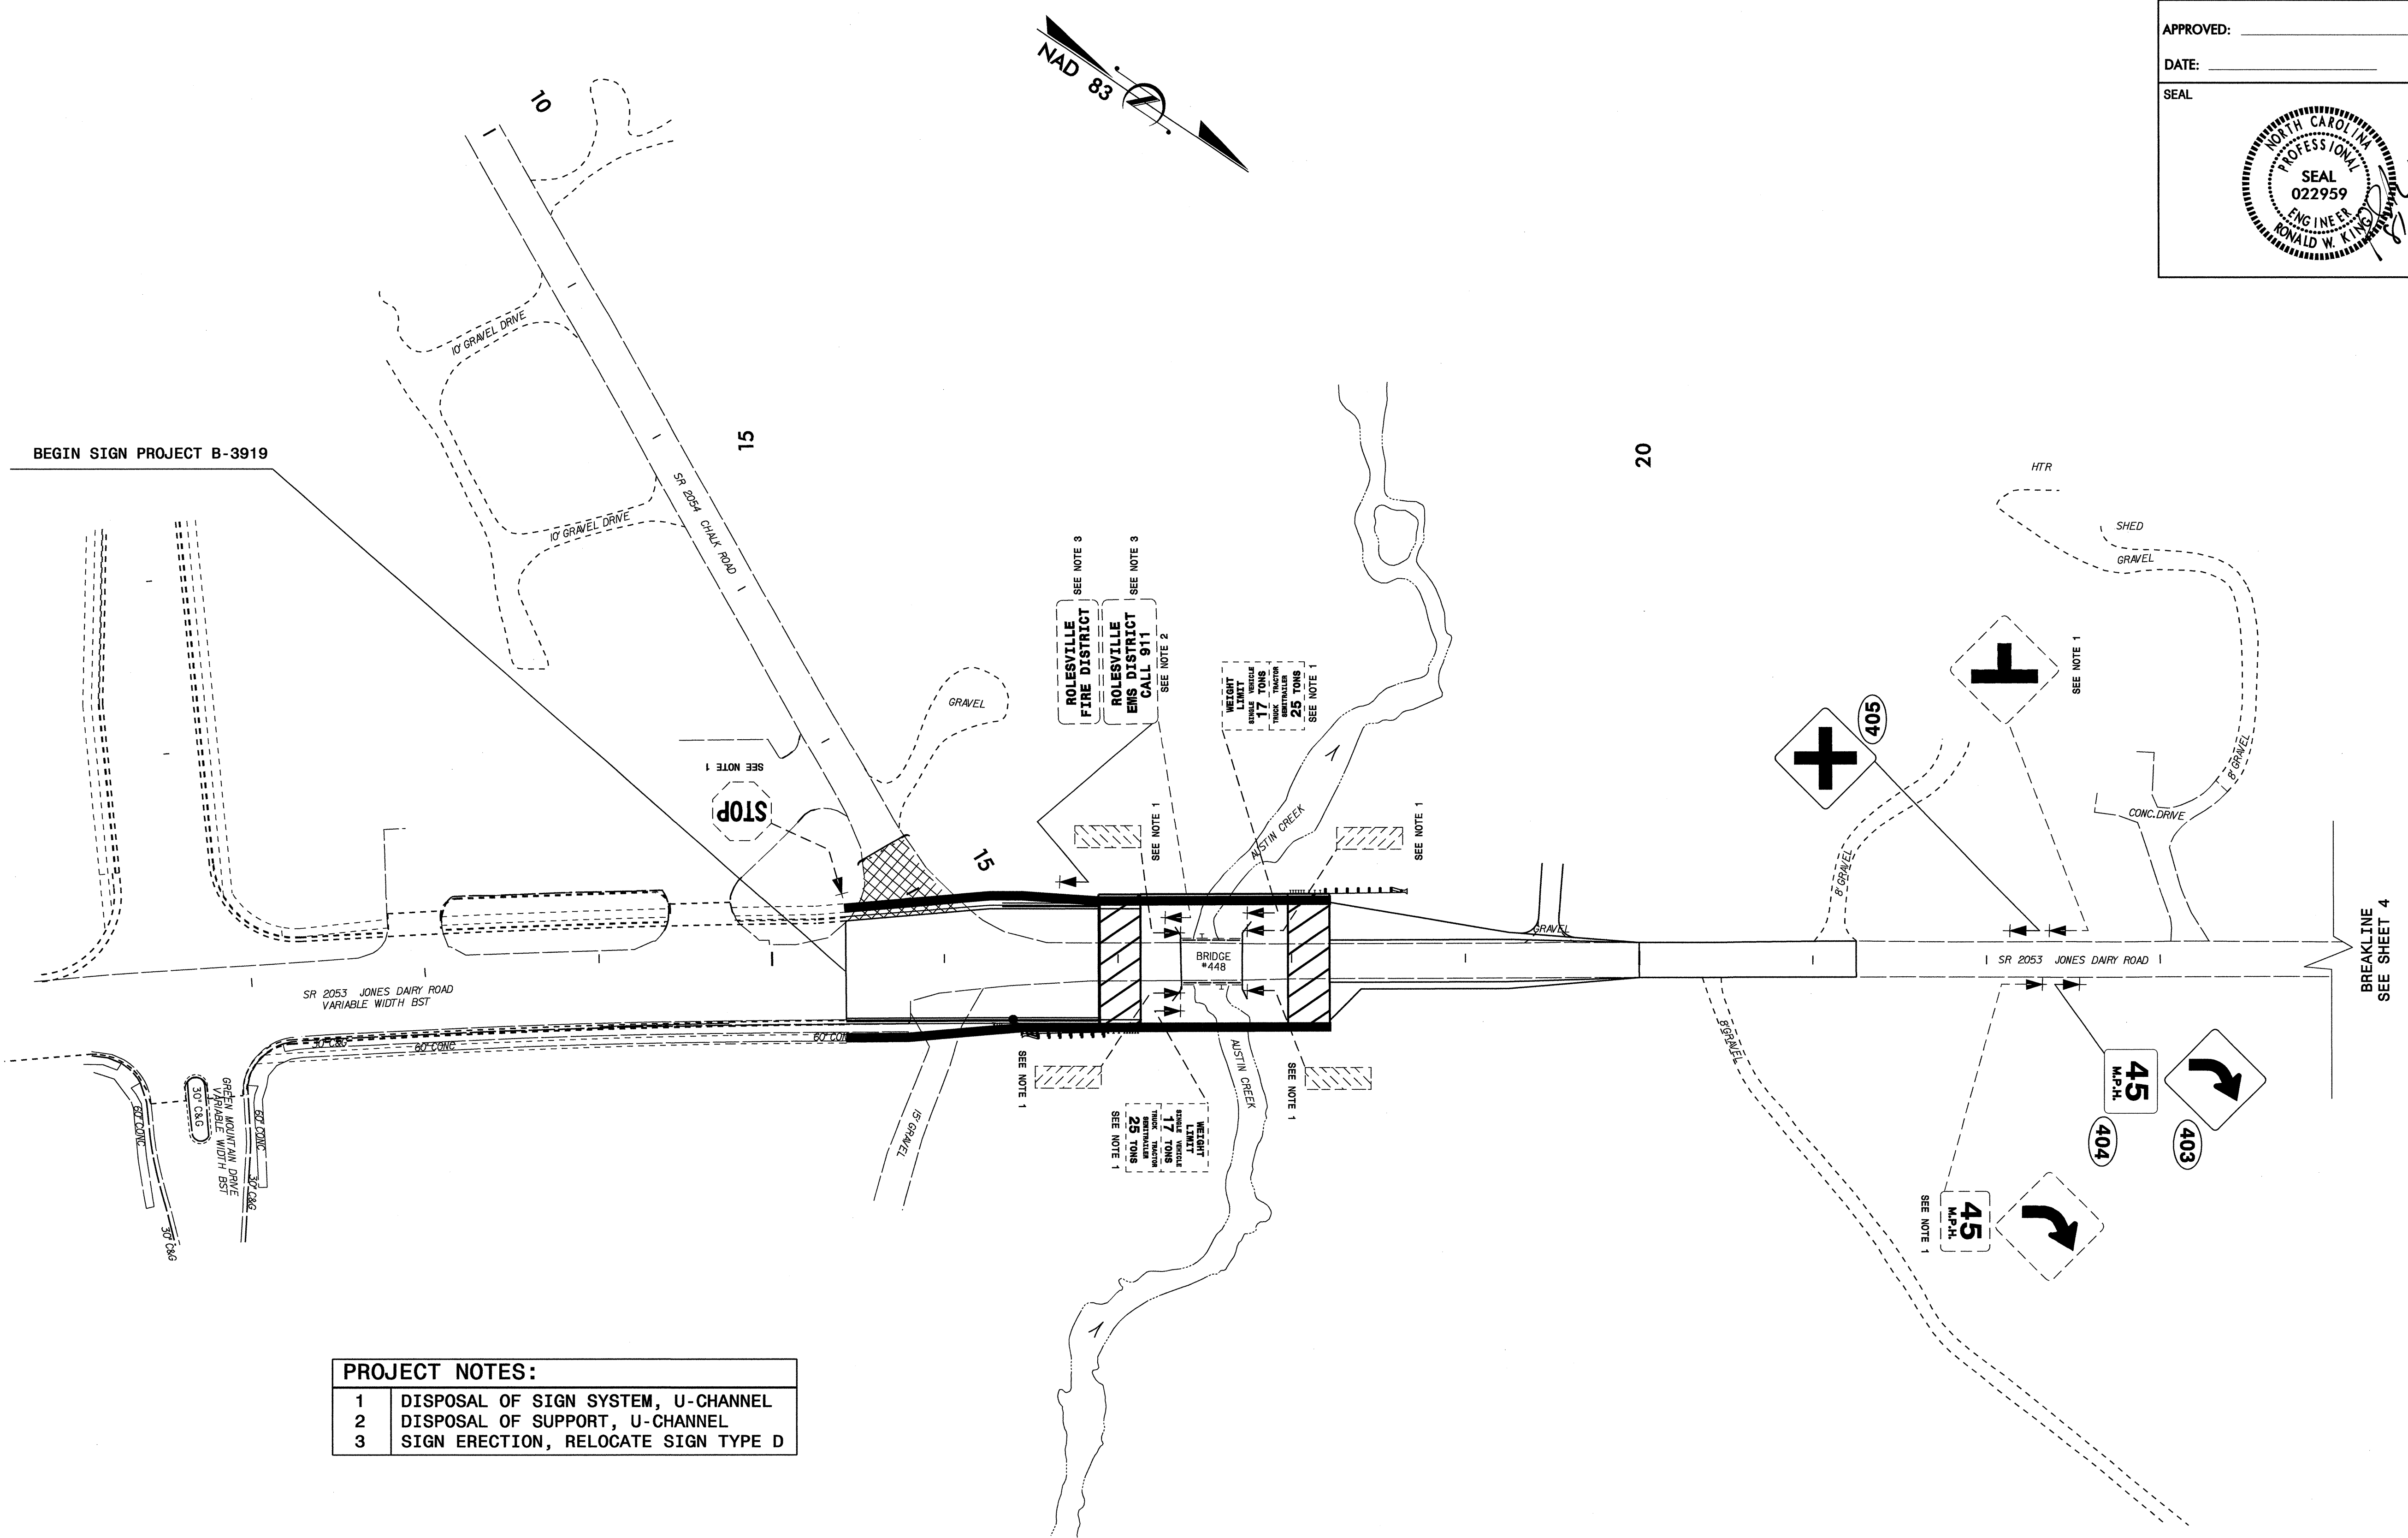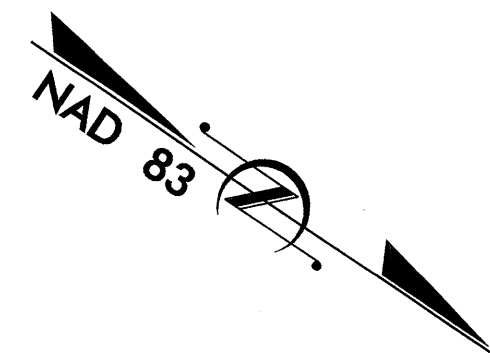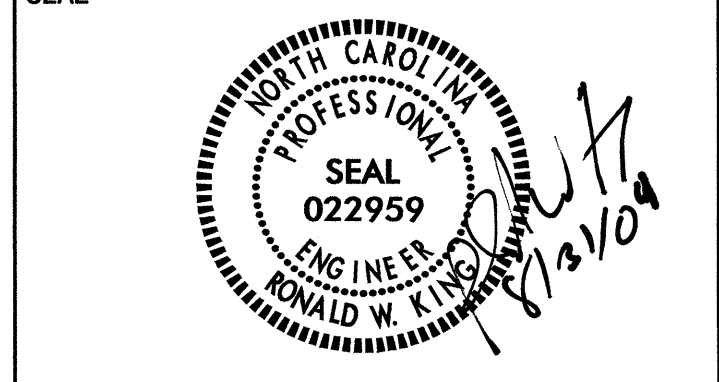


PROJECT NOTES:

1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL
2	DISPOSAL OF SUPPORT, U-CHANNEL
3	SIGN ERECTION, RELOCATE SIGN TYPE D

**EXISTING and PROPOSED SIGNS
 SR 2053 JONES DAIRY ROAD
 WAKE COUNTY**

25-AUG-2009 11:33
 pt:\upper\projects\10303919\office\signing\cadd\signing layout plans\b3919_rdy.dsn.l\dgn
 glen.lizz1 AL TELC221636

APPROVED: _____
 DATE: _____

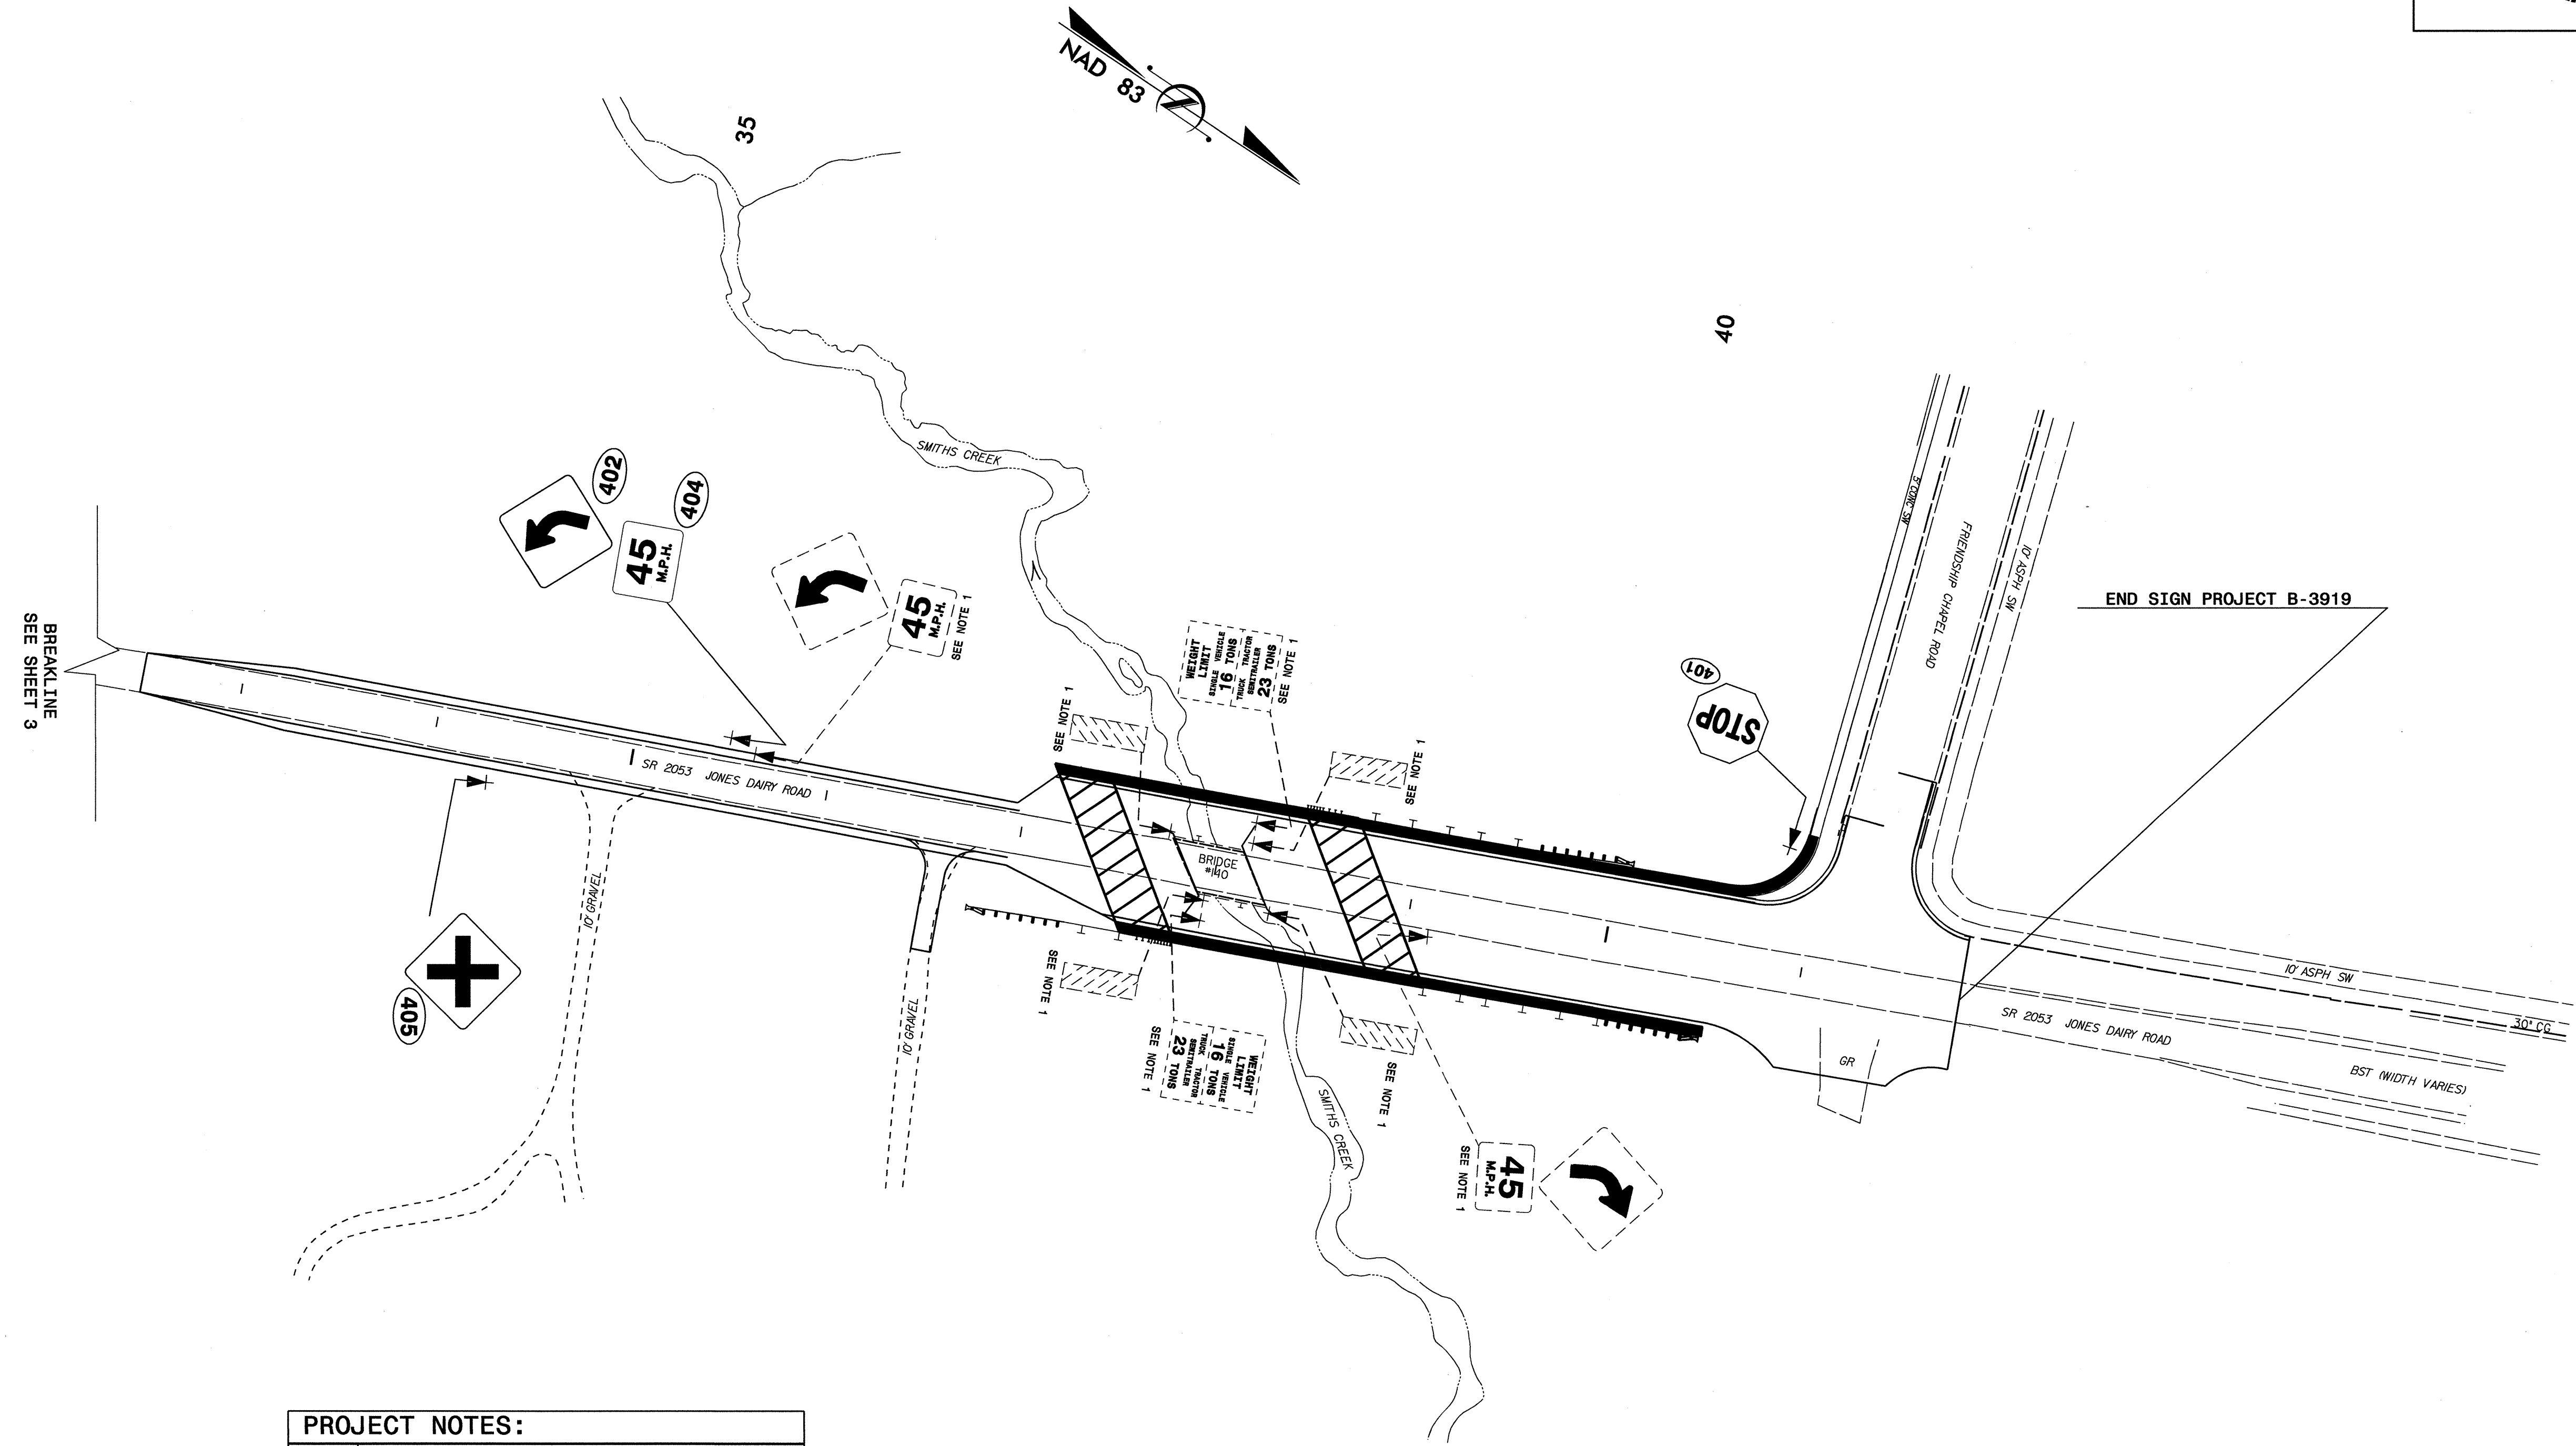

PROJECT NOTES:	
1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL

**EXISTING and PROPOSED SIGNS
 SR 2053 JONES DAIRY ROAD
 WAKE COUNTY**

25-AUG-2009 11:34
 p:\supp\proj\25-03919\office\signing\cadd\signing_layout_plans\b3919_rdy_dsn.lldgn
 gter.lizz1 AT 10:22:26-08