


**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**PAVEMENT MARKING PLAN
WILKES COUNTY**

LOCATION: BRIDGE NO. 99 OVER COAL CREEK ON SR 1317 (OLD HWY 60)

TIP NO. B-4677	SHEET NO. PMP - 1
APPROVED: <i>[Signature]</i>	
DATE: 10/20/09	
SEAL	
	

T.I.P.: B-4677

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
SR 1317 OLD HWY 60	PAINT	NONE

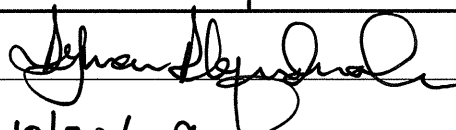

- B) PLACE TWO APPLICATIONS OF PAINT PAVEMENT MARKINGS ON THE FINAL WEARING SURFACE. PLACE THE SECOND APPLICATION OF PAINT UPON SUFFICIENT DRYING TIME OF THE FIRST.
- C) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
- D) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
- E) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.

INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN COVER SHEET
PMP-2	PAVEMENT MARKING SCHEDULE PAVEMENT MARKING DETAIL

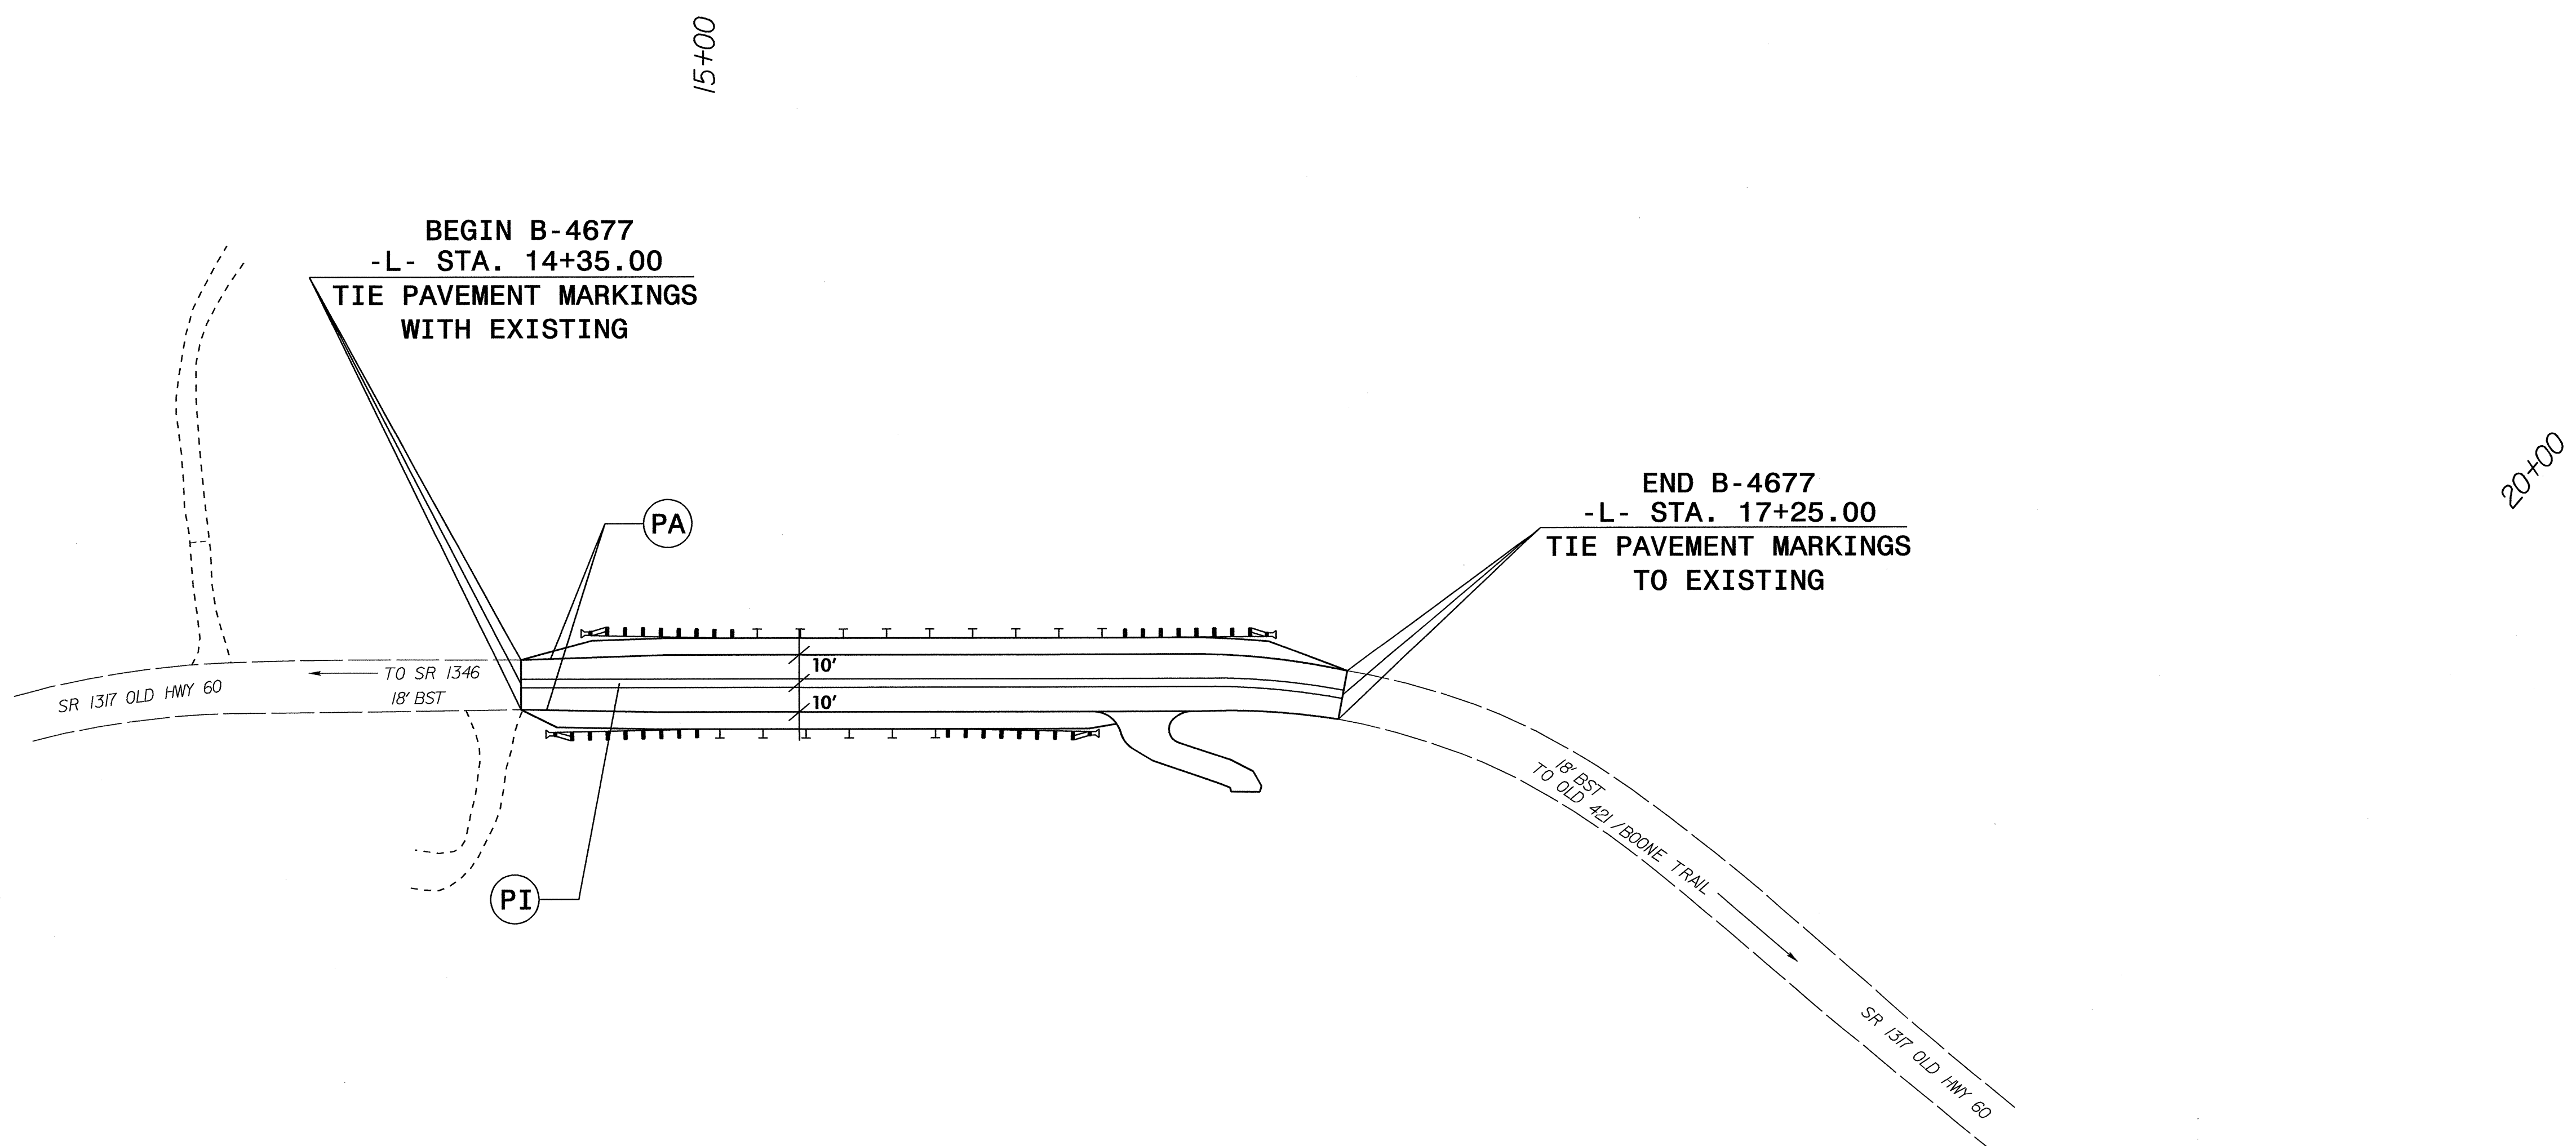
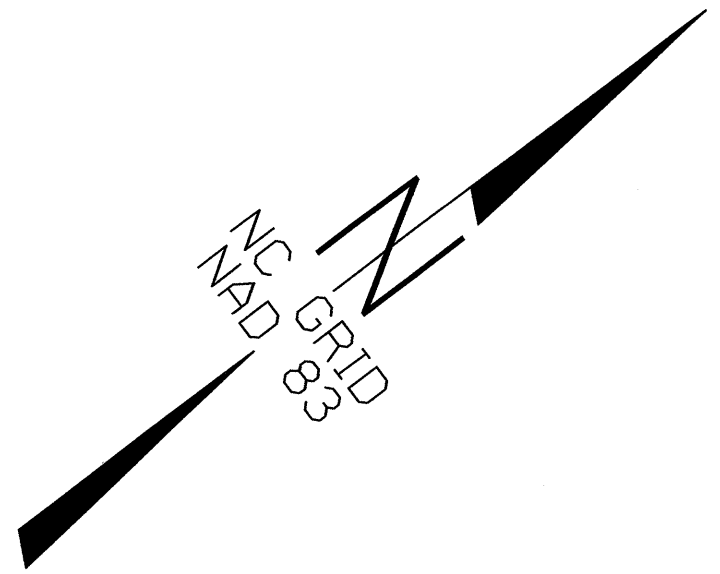
PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

A. ALQUDWAH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER
M. TRACEY SIGNING & DELINEATION PROJECT DESIGN ENGINEER

TIP NO. B-4677	SHEET NO. PMP-2
APPROVED: 	
DATE: 10/28/09	
SEAL	
	

B-4677 PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM	QUANTITY	TOTAL
FINAL PAVEMENT MARKINGS				
		PAINT (4")		
PA	WHITE EDGELINE (2X)		580 LF	
PI	YELLOW DOUBLE CENTER (2X)		580 LF	
			TOTAL	1160 LF



PAVEMENT MARKING DETAIL

20-OCT-2009 10:22
 p:\11p\project\11-4677\tr\at\fic\signing\cadd\pmp\b-4677_sgn_pmp_sheet_1.dgn
 mtr-seey AT TEC221668