

T.I.P.: B-3608

**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

**PAVEMENT MARKING PLAN  
AVERY COUNTY**

**LOCATION: BRIDGE NO. 44 OVER NORTH TOE RIVER ON US 19E**

TIP NO. B-3608	SHEET NO. PMP-1
APPROVED:	
DATE: 10/20/09	
SEAL	

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION
1250.01	PAVEMENT MARKER SPACING
1253.01	SNOWPLOWABLE RAISED PAVEMENT MARKERS

**GENERAL NOTES**

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
US 19E	THERMOPLASTIC	SNOWPLOWABLE (40' SPACING)
SR 1130 POWER MILL CREEK RD	THERMOPLASTIC	NONE


- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.  
 C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.  
 D) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.

**INDEX**

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN COVER SHEET
PMP-2	PAVEMENT MARKING SCHEDULE AND PAVEMENT MARKING DETAIL


**PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT**

A. ALQUDWAH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER  
 M. TRACEY SIGNING & DELINEATION PROJECT DESIGN ENGINEER/TECHNICIAN

TIP NO.	SHEET NO.
B-3608	PMP-2
APPROVED: <i>[Signature]</i>	
DATE: 10/20/2009	
SEAL	
	

**B-3608 PAVEMENT MARKING SCHEDULE**

SYMBOL	DESCRIPTION	PAY ITEM	QUANTITY BREAKDOWN	TOTAL QUANTITY
FINAL PAVEMENT MARKINGS				
TA	WHITE EDGE LINE	THERMOPLASTIC (4")	2028 LF	
TI	YELLOW DOUBLE CENTER		1952 LF	
				TOTAL 3980 LF
MARKERS				
SNOWPLOWABLE MARKERS				
ME	YELLOW & YELLOW		20 EA	
				TOTAL 20 EA

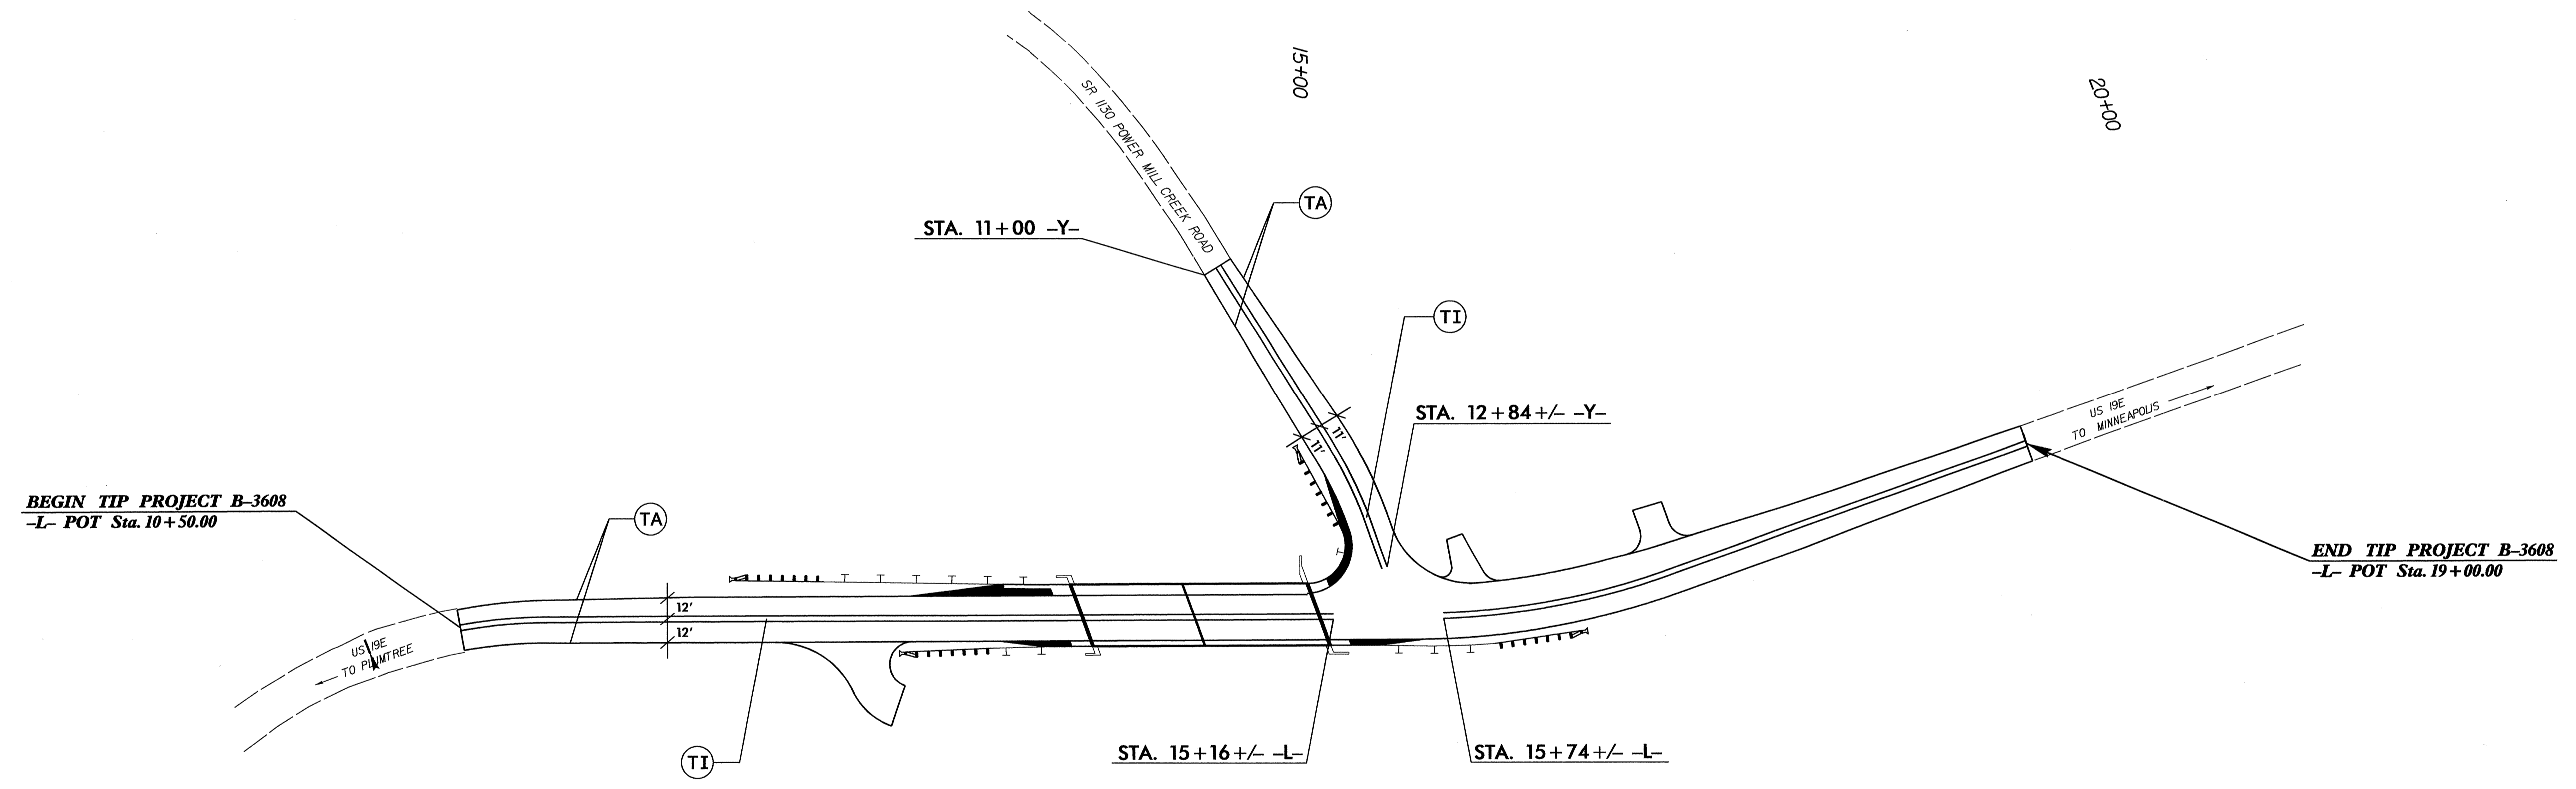

**PAVEMENT MARKING DETAIL**

20-OCT-2009 10:24  
 P:\p\p\projects\B-3608\tr-af\fig\sig\ing\ccad\pmp\ab-3608\_sgn\_bpmp\_ldgn  
 mtracey AT TEC222668