

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
MECKLENBURG COUNTY

LOCATION: BRIDGE No. 177 OVER REEDY CREEK ON SR 2804 (REEDY CREEK ROAD)

TIP NO.	SHEET NO.
B-4580	PMP-1
APPROVED: <i>Ayman Alqudwah</i>	
DATE: 12/30/09	
SEAL	

T.I.P.: B-4580

CONTRACT: C202471A

INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN COVER SHEET
PMP-2	PAVEMENT MARKING SCHEDULE AND PAVEMENT MARKING DETAIL

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1250.01	PAVEMENT MARKER SPACING
1251.01	RAISED PAVEMENT MARKERS - TEMPORARY AND PERMANENT
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE AS FOLLOWS:

ROAD NAME	MARKING	MARKER
-L- SR 2804 BRIDGE	THERMOPLASTIC COLD APPLIED, TYPE III	PERMANENT RAISED PERMANENT RAISED

D) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

E) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.

F) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT



A.I. Alqudwah, P.E. SIGNING & DELINEATION REGIONAL ENGINEER

W. Dakduk SIGNING & DELINEATION PROJECT DESIGN ENGINEER

TIP NO.	SHEET NO.
B-4850	PMP-2
APPROVED: <i>[Signature]</i>	
DATE: 12/30/09	
SEAL	

B-4580 FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY	TOTAL
FINAL PAVEMENT MARKINGS			
COLD APPLIED PLASTIC(4") TYPE3-Permanent Wet Reflective			
CA	WHITE EDGELINE	220 LF	
CI	YELLOW DOUBLE CENTER	220 LF	
		TOTAL	440 LF
THERMOPLASTIC (4", 120 MILS)			
TI	YELLOW DOUBLE CENTER	1170 LF	
		TOTAL	1170 LF
THERMOPLASTIC (4", 90 MILS)			
TA	WHITE EDGELINE	1170 LF	
		TOTAL	1170 LF
MARKERS			
PERMANENT RAISED PAVEMENT MARKERS			
MA	YELLOW & YELLOW	10 EA	
		TOTAL	10 EA

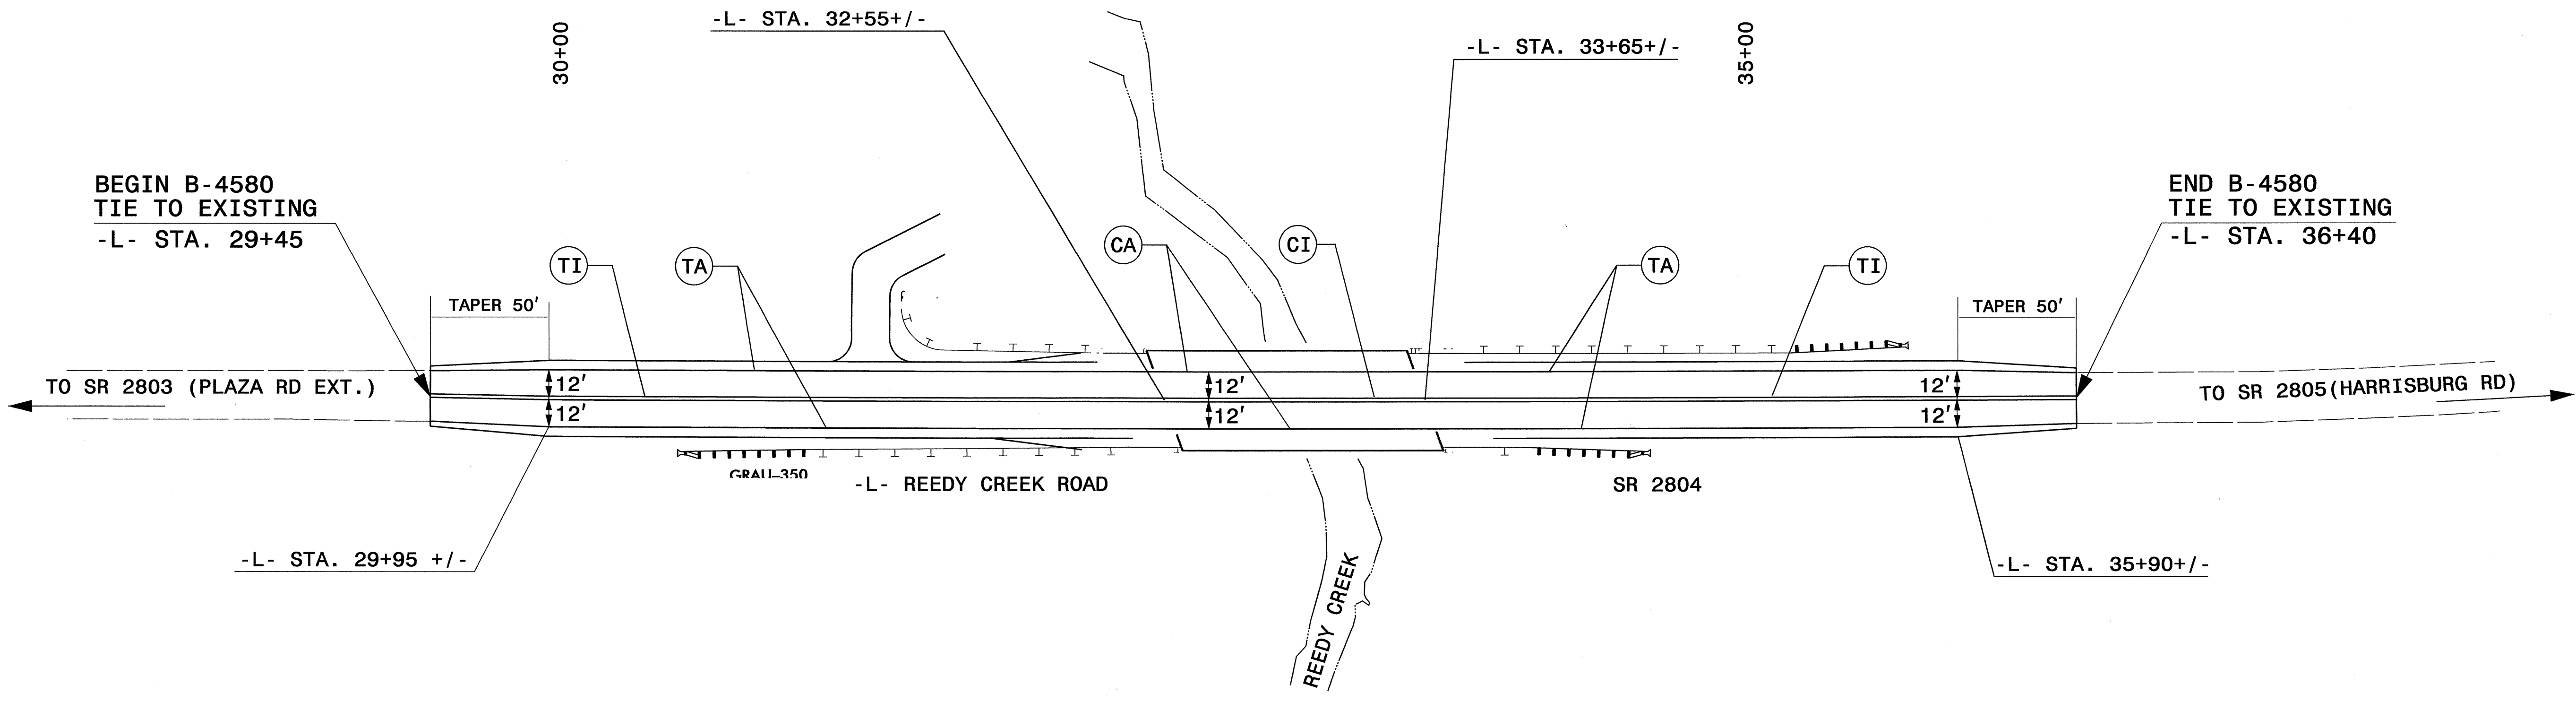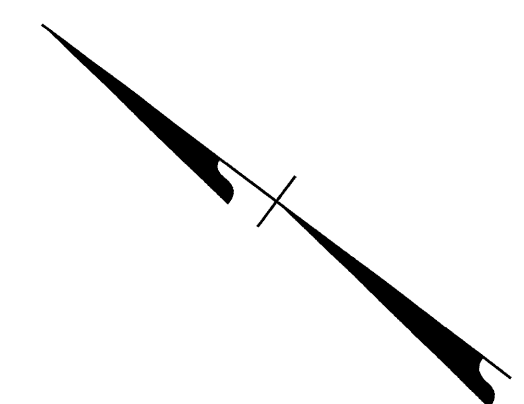

PAVEMENT MARKING SCHEDULE AND PAVEMENT MARKING DETAIL

28-DEC-2009 08:58
 p:\jip\projects\B-4580\Traffic\Signing\CADD\PM\B-4580_Sgn_PMP_2.dgn
 wdkduk AT TECC22679