

T.I.P.: B-4211

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**PAVEMENT MARKING PLAN
NASH COUNTY**

LOCATION: REPLACE BRIDGE 56 OVER TAR RIVER ON SR 1544

TIP NO. B-4211	SHEET NO. PMP-1
APPROVED:	
DATE: 6-7-11	

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACES AS FOLLOWS:

ROAD NAME	MARKING	MARKER
SR 1544 (-L-)	THERMOPLASTIC	NONE
BRIDGE DECK	COLD APPLIED PLASTIC (TYPE II OR III)	NONE

- B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.
 C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
 D) STOPBAR LOCATION AT NON-SIGNALIZED INTERSECTIONS MAY BE ADJUSTED AS DIRECTED BY THE ENGINEER.
 E) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS ON BRIDGE DECK PRIOR TO PLACING FINAL COLD APPLIED PLASTIC PAVEMENT MARKINGS.

**PAVEMENT
MARKING SCHEDULE**

TA	WHITE EDGELINE
THERMOPLASTIC(4", 90 MILS)	
THERMOPLASTIC(4", 120 MILS)	
TD	2 FT. - 13 FT./SP WHITE MINISKIP
TI	YELLOW DOUBLE CENTER
THERMOPLASTIC(24", 120 MILS)	
T2	WHITE STOPBAR
COLD APPLIED PLASTIC (4") Type II OR III - Permanent Std	
CA	WHITE EDGELINE
CI	YELLOW DOUBLE CENTER

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

AYMAN ALQUDWAH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER
D. PILLAR SIGNING & DELINEATION DESIGN ENGINEER



INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN COVER SHEET, NOTES AND MARKING SCHEDULE
PMP-2	PAVEMENT MARKING DETAILS

SYMBOL AND PAVEMENT MARKING LEGEND


THERMOPLASTIC

- (TA) WHITE EDGELINE 4"
- (TD) 2 FT. - 13 FT./SP WHITE MINISKIP
- (TI) YELLOW DOUBLE CENTER 4"
- (T2) WHITE STOPBAR

COLD APPLIED PLASTIC

- (CA) WHITE EDGELINE 4"
- (CI) YELLOW DOUBLE CENTER 4"

BEGIN TIP PROJECT B-4211
-L- STA. 13+07.77

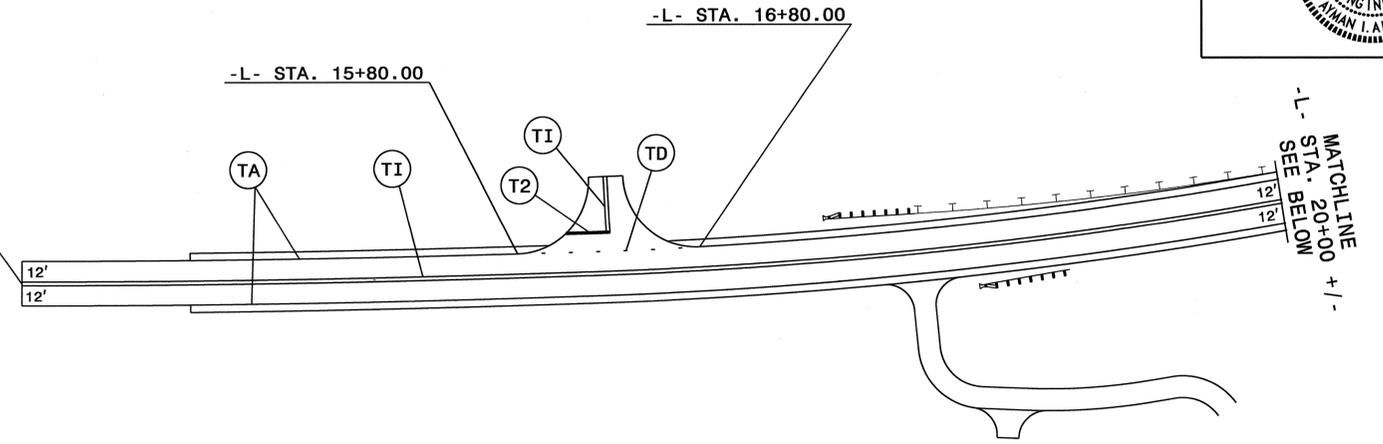

-L- STA. 20+59.50

-L- STA. 23+89.50

END TIP PROJECT B-4211
-L- STA. 29+00.00

