

**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

8/22/2011 REVISED PRIOR TO LET TO ADD STOP SIGN FOR WZTC DETOUR. REQUESTED BY DIVISION CONSTRUCTION ENGINEER. S. COLEMAN

TIP NO. B-4657	SHEET NO. SIGN-1
APPROVED: <i>[Signature]</i>	
DATE: 8/24/11	
SEAL	



**SIGNING PLAN  
WAKE COUNTY**

**LOCATION: BRIDGE NO. 340 OVER NORFOLK/SOUTHERN RAILROAD  
ON SR 1101 (PINEY GROVE-WILBON ROAD)**

**T.I.P.: B-4657**

**CONTRACT: 202733**

**SUMMARY OF QUANTITIES**

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	64	L.F.
4102000000	904	SIGN ERECTION, TYPE E	2	EA.
4108000000	904	SIGN ERECTION, TYPE F	2	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	15	EA.

**ROADWAY STANDARD DRAWING**

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

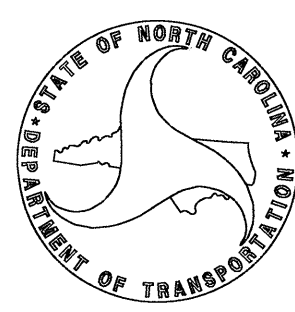
- 904.10 ORIENTATION OF GROUND MOUNTED SIGNS
- 904.50 MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

**GENERAL NOTES**

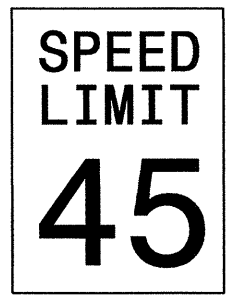

- . SIGNS FURNISHED BY STATE
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING. SEE TRAFFIC CONTROL PLANS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

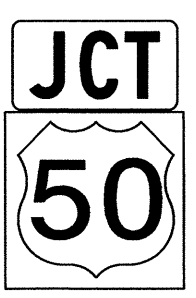
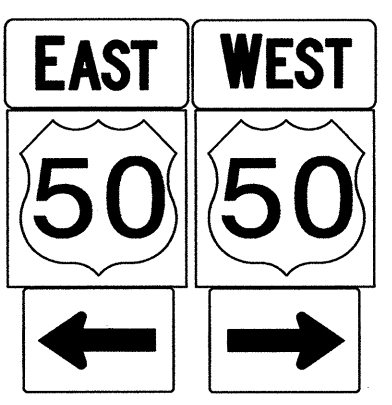
SUSAN B. KUNZ SIGNING & DELINEATION REGIONAL ENGINEER  
SAMUEL COLEMAN SIGNING & DELINEATION PROJECT DESIGN ENGINEER



**"E" SIGNS**

<p>(401) QUANTITY REQ'D .1_</p>  <p>ONE "U" POST PER SIGN LOCATE AS SHOWN ON SHEET SIGN 2</p>	<p>(402) QUANTITY REQ'D .1_</p>  <p>ONE "U" POST PER SIGN LOCATE ON BAREFOOT RD AT NC 42 AS DIRECTED BY THE RESIDENT ENGINEER FOR DETOUR</p>
--	---

**"F" SIGNS**


<p>(501)</p>  <p>ONE "U" POST PER SIGN LOCATE AS SHOWN ON SHEET SIGN 2</p>	<p>(502)</p>  <p>TWO "U" POSTS PER SIGN LOCATE AS SHOWN ON SHEET SIGN 2</p>
--	--

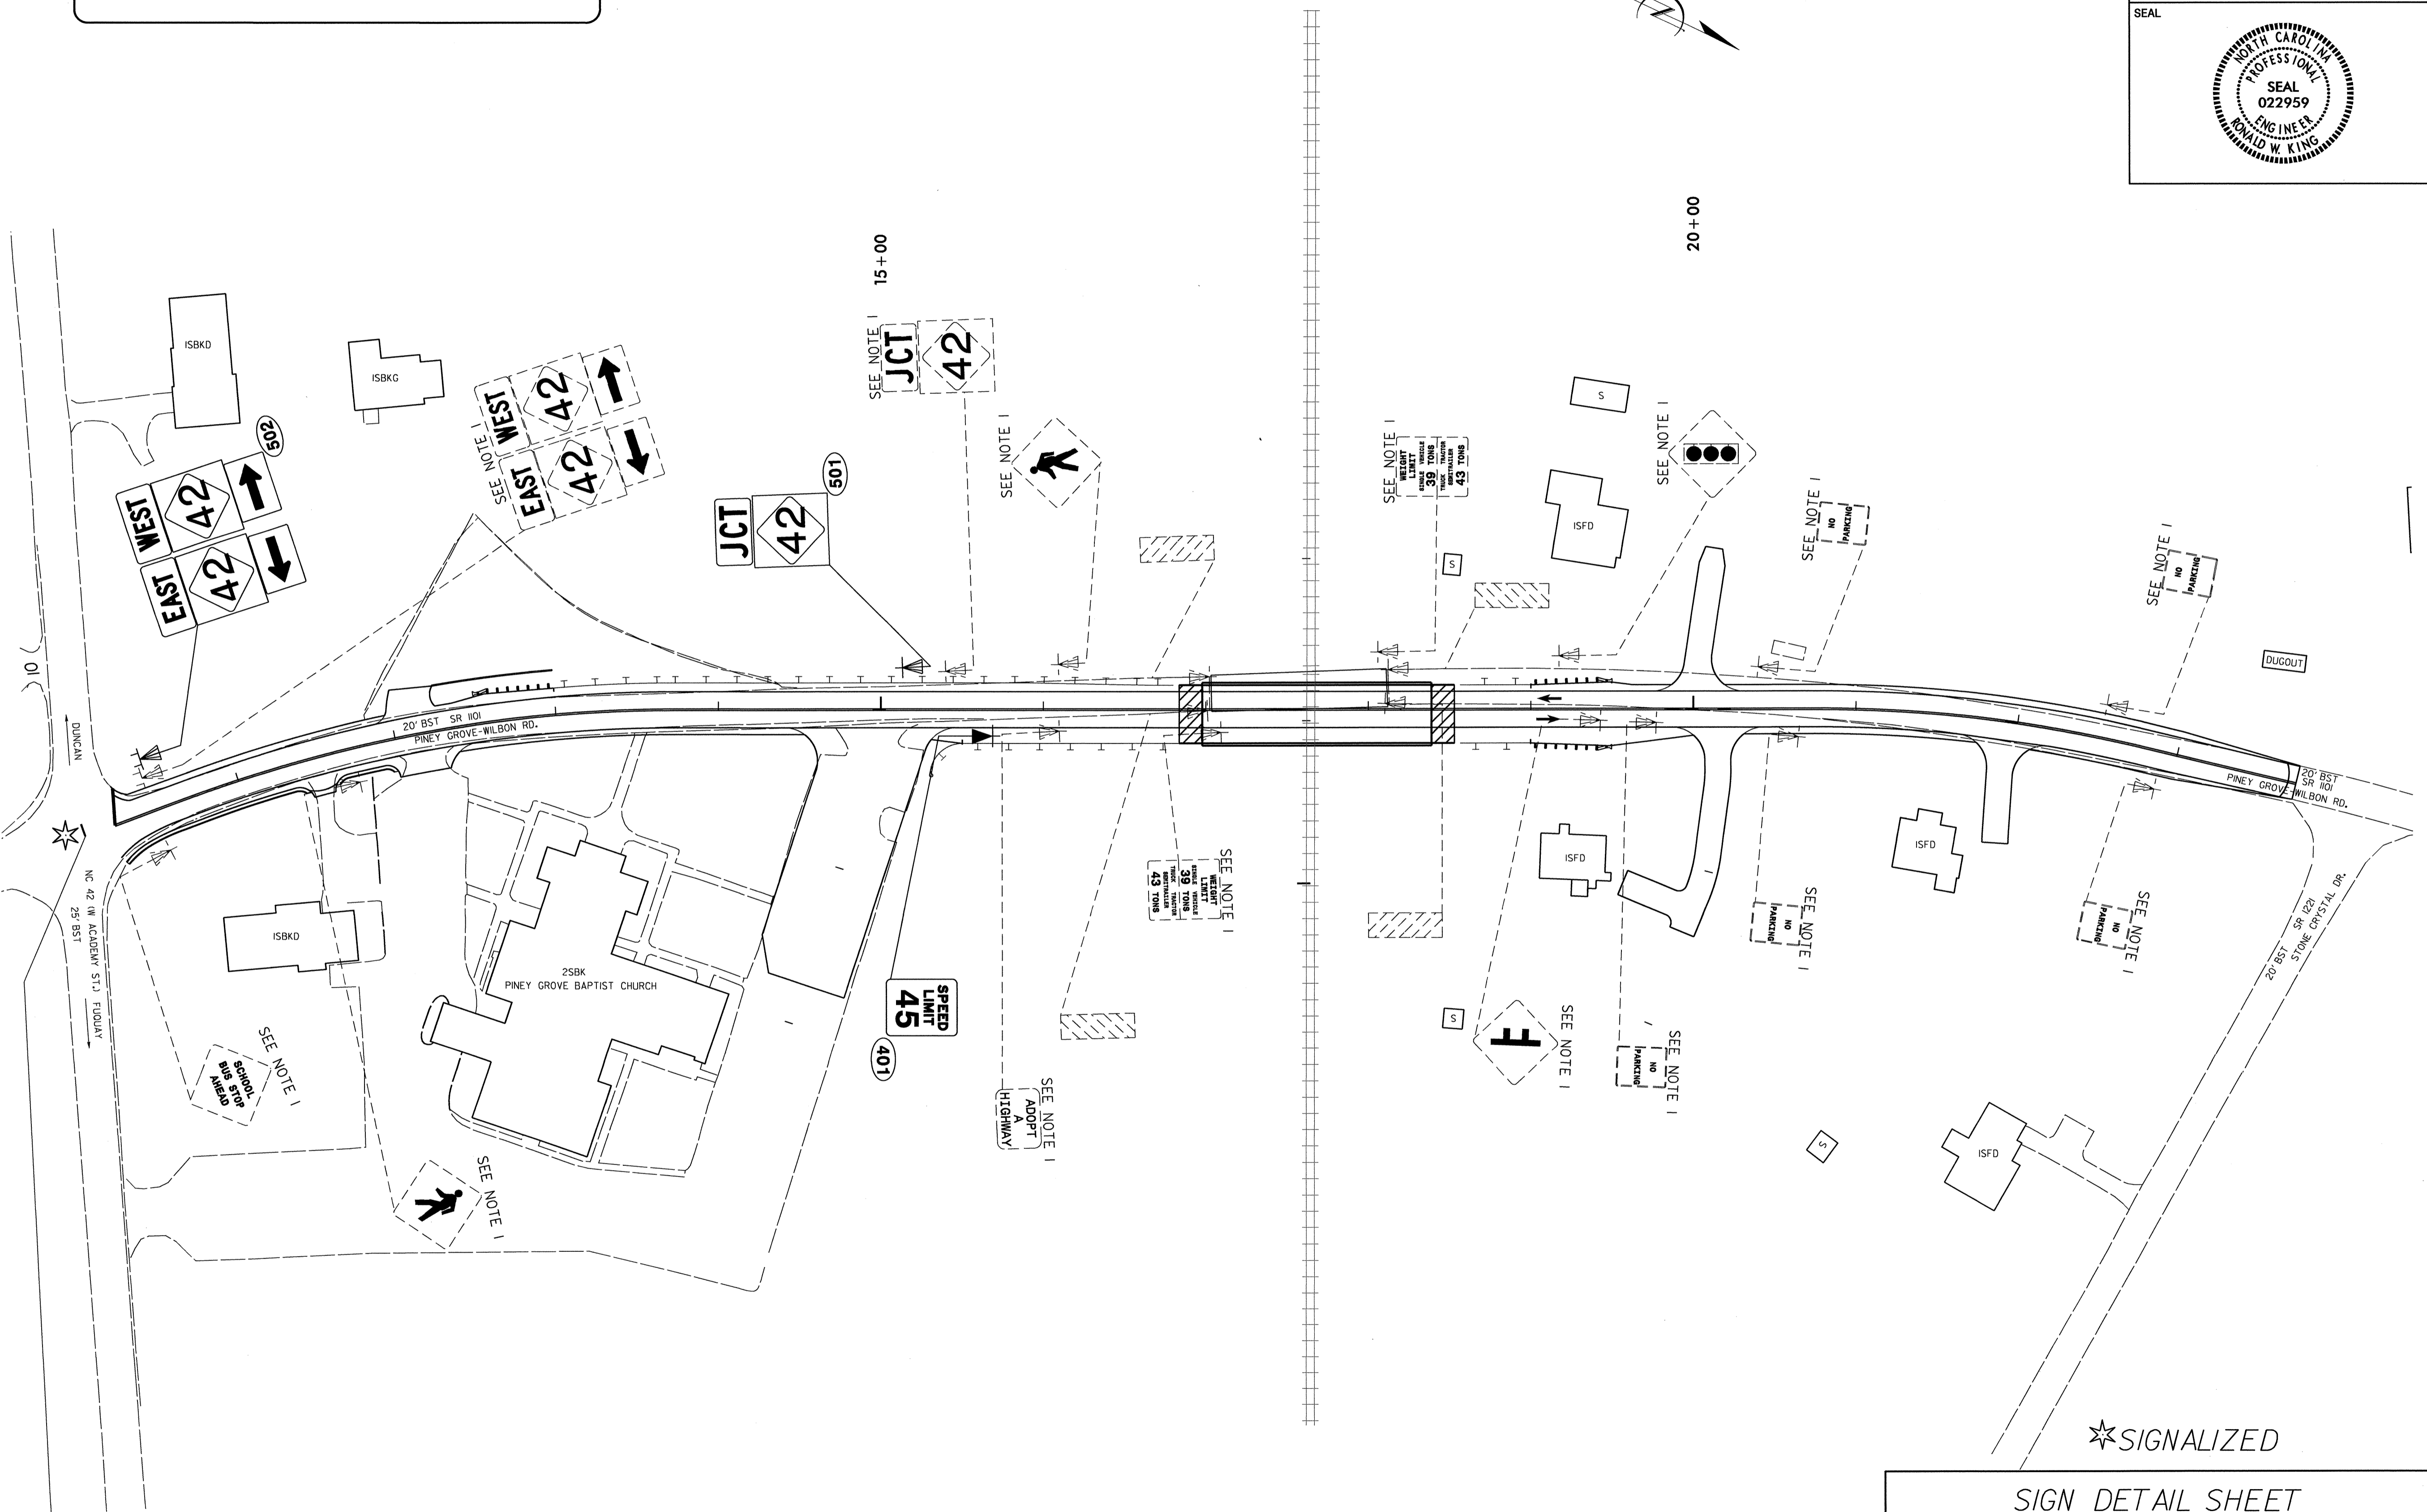
**INDEX**

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET, TYPE E AND F SIGNS
SIGN-2	SIGN DETAIL SHEET

**PROJECT NOTE**

1 DISPOSAL OF SIGN SYSTEM, U-CHANNEL

TIP NO. B-4657	SHEET NO. SIGN-2
APPROVED: <i>[Signature]</i>	
DATE: <i>[Date]</i>	
SEAL	
	



BEGIN PROJECT B-4657 STA 10+00 -L-

★ SIGNALIZED  
SIGN DETAIL SHEET  
SR 1101 (PINEY GROVE-WILBON RD)

C:\Users\sc0116505\OneDrive\Documents\Projects\B-4657\Traffic\Signing\CADD\Signing Layout Plans\B-4657\_Sgn\_SGN.L\Layout.dgn  
 01/16/2011 10:05 AM  
 sc0116505  
 J. Coleman