TIP NO.	SHEET NO.
B-4498	PMP-1

APPROVED:

DATE: 8/27/11

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
022959
ENGINEER
RONALD W. KING

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

PAVEMENT MARKING PLAN
DAVIDSON COUNTY

LOCATION: BRIDGE 199 ON SR 1243 (CENTER STREET) OVER ABBOTTS CREEK

T.I.P.: B-4498

CONTRACT: C202738

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -
PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C.,
DATED JULY 2006 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE
CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - 2 LANE AND MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATOR SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATOR TYPES
1262.01	GUARDRAIL END DELINEATION

PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION
	THERMOPLASTIC LINES (4")
TI	YELLOW DOUBLE CENTER
TA	WHITE EDGELINE

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF
THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN,
OR DIRECTED BY THE ENGINEER.

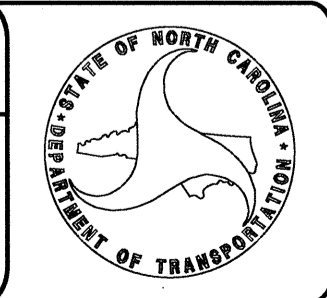A) INSTALL PAVEMENT MARKINGS AND PAVEMENT MARKERS ON THE FINAL SURFACE
AS FOLLOWS:

ROAD NAME	MARKING	MARKER
SR 1243	THERMOPLASTIC	NONE

B) TIE PROPOSED PAVEMENT MARKING LINES TO EXISTING PAVEMENT MARKING LINES.

C) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.

D) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY
THE ENGINEER.

E) STOPBAR LOCATION AT NON-SIGNALIZED INTERSECTIONS MAY BE ADJUSTED AS
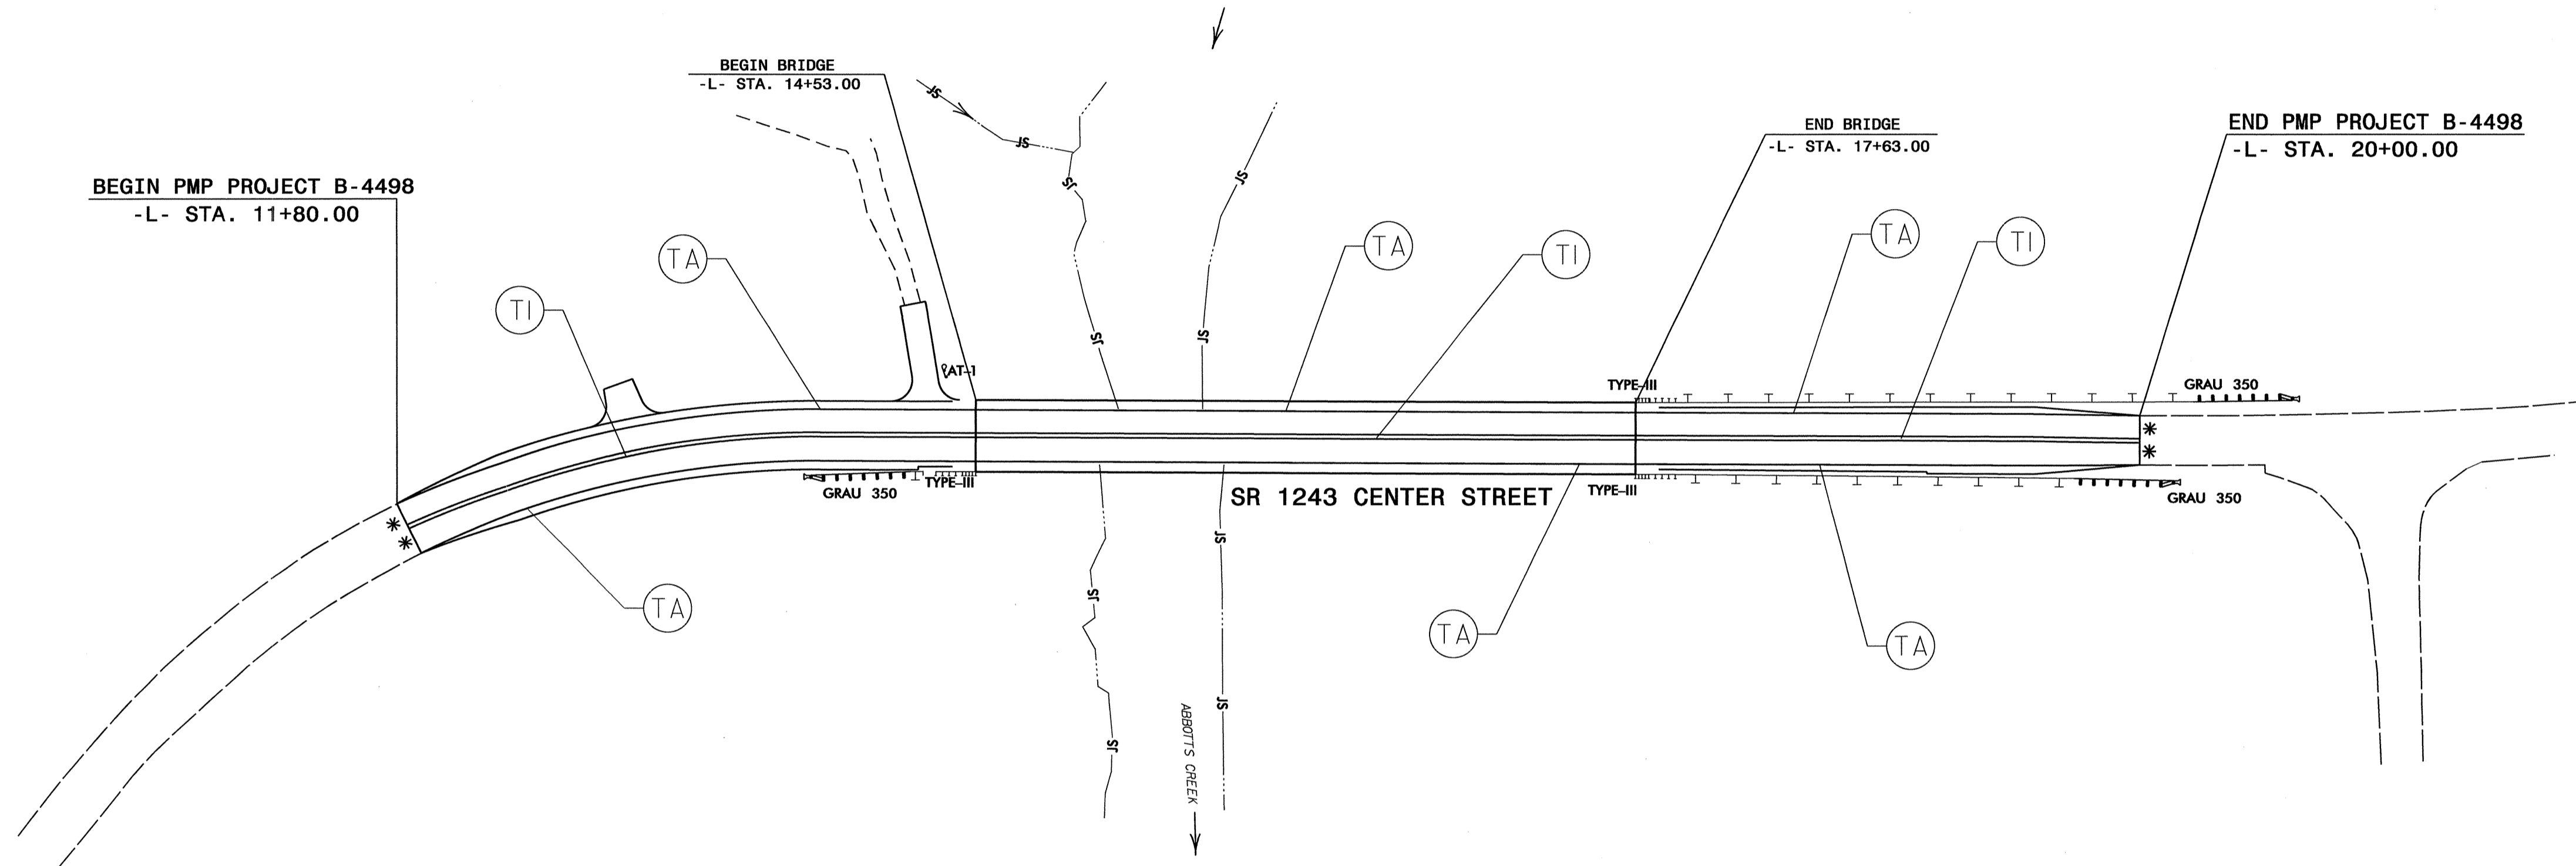DIRECTED BY THE ENGINEER.

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

SUSAN B. KUNZ SIGNING & DELINEATION REGIONAL ENGINEER

GEORGE TERLIZZI SIGNING & DELINEATION DESIGN ENGINEER

STATE OF NORTH CAROLINA · DEPARTMENT OF TRANSPORTATION

INDEX

APPROVED:

DATE: 8/23/11

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
022959
ENGINEER
RONALD W. KING

BEGIN BRIDGE
-L- STA. 14+53.00

END BRIDGE
-L- STA. 17+63.00

END PMP PROJECT B-4498
-L- STA. 20+00.00

BEGIN PMP PROJECT B-4498
-L- STA. 11+80.00

TA
TI
TA
TI
TA
TI

SAT-1

TYPE-III

TYPE-III

GRAU 350

GRAU 350

GRAU 350

GRAU 350

TYPE-III

TYPE-III

TA
TA
TA

SR 1243 CENTER STREET

ABBOTTS CREEK

✱✱	TIE TO EXISTING MARKINGS

PAVEMENT MARKING DETAIL