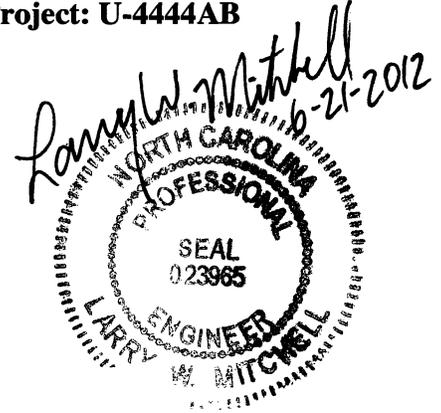


**PROJECT SPECIAL PROVISIONS****Utility Construction****I. GENERAL CONSTRUCTION REQUIREMENTS:****Specifications:**

The proposed utility construction shall meet the applicable requirements of the NC Department of Transportation's "Standard Specifications for Roads and Structures" dated January 2012, and the details as shown on the plans, as outlined in the following provisions, or as directed by the Engineer.

**Owner and Owner's Requirements:**

The existing utility vault to be removed is owned by The City of Fayetteville PWC and serves The Town of Spring Lake. The existing valve vault to be relocated is privately owned. The Contractor shall provide access for the owners' representatives to all phases of construction. The owners shall be notified two weeks prior to commencement of any work and one week prior to service interruption. Only authorized personnel of the owners shall operate valves in the existing water distribution or sewer collection systems.

**Remove Utility Vault:**

Existing utility vault and appurtenances shall be located and removed as indicated on plans. Existing piping inlet and outlet shall be capped outside the vault. Remaining void shall be tamped and backfilled.

**Relocate Valve Vault:**

Existing valve vault and appurtenances shall be relocated and reconnected as indicated on plans. Abandoned piping inlet and outlet shall be capped. Remaining void shall be tamped and backfilled.

**II. MEASUREMENT AND PAYMENT:**

**Remove Utility Vault:** will be measured and paid for per each utility vault removed and void backfilled. Payment will be inclusive of all work, materials, and equipment to include, but not limited to, #57 stone, caps, and select backfill.

**Relocate Valve Vault:** will be measured and paid for per each valve vault relocated and void backfilled. Payment will be inclusive of all work, materials, and equipment to include, but not limited to, #57 stone, caps, and select backfill.

**PROJECT SPECIAL PROVISIONS****UTILITIES BY OTHERS:**

General:

The following utility companies have facilities that will be in conflict with the construction of this project:

- A) Progress Energy – Power Distribution and Transmission**
- B) Sandhills Utility Services – Power Distribution**
- C) CenturyLink – Telecommunications**
- D) Time Warner Cable - Cable Television**
- E) Old North Utility Services**

The conflicting facilities of these concerns will be adjusted prior to the date of availability, unless otherwise noted and are therefore listed in these special provisions for the benefit of the Contractor. All utility work listed herein will be done by the utility owner or his Contractor. All utilities are shown on the plans from the best available information.

The Contractor's attention is directed to Article 105-8 of the Standard Specifications.

**Utilities Requiring Adjustment:**

- A) Progress Energy – Power Distribution and Transmission**
  - See Utilities by Others Plans for details. Project let date is October 16, 2012. All work to be completed by December 1, 2012.
  - Contact Ms. Sheila Talton @ 919-481-6126

**B) Sandhills Utility Services – Power Distribution**

- See Utilities by Others Plans for details. Project let date is October 16, 2012. All work to be completed by December 1, 2012.
- Contact Mr. Bill Cannon @ 910-497-7399 x 255

**C) CenturyLink – Telecommunications**

- See Utilities by Others Plans for details. Project let date is October 16, 2012. All work to be completed by December 1, 2012.
- Contact Mr. Kevin Godwin @ 910-366-2142

**D) Time Warner Cable – Cable Television**

- See Utilities by Others Plans for details. Project let date is October 16, 2012. All work to be completed by December 1, 2012.
- Contact Mr. Tony Mlynski @ 910-401-5088

**E) Old North Utility Services –Force Main Sewer**

- See Utilities by Others Plans for details. Project let date is October 16, 2012. All work to be completed by December 1, 2012.
- Contact Mr. Charles Karpa @ 910-495-1311