

TIP NO.	SHEET NO.
U-2810B	SIGN-1
APPROVED: <i>[Signature]</i>	
DATE: 8/24/12	
SEAL	

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN
CUMBERLAND COUNTY**

**LOCATION: SR 1003 (CAMDEN ROAD) FROM HOPE MILLS
BYPASS TO SR 1290 (KING CHARLES ROAD)**

T.I.P.: U-2810B

CONTRACT: C202243

PAY ITEM NOTES

1	DISPOSAL OF SIGN SYSTEM, U-CHANNEL
---	------------------------------------

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB U-CHANNEL	999	L.F.
4102000000	904	SIGN ERECTION, TYPE E	58	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	33	EA.

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . SIGNING PLANS DO NOT INCLUDE TEMPORARY CONSTRUCTION SIGNING OR PAVEMENT MARKINGS. SEE TRAFFIC CONTROL PLANS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


INDEX








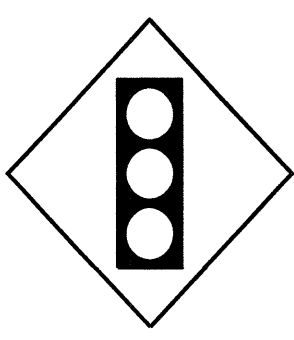
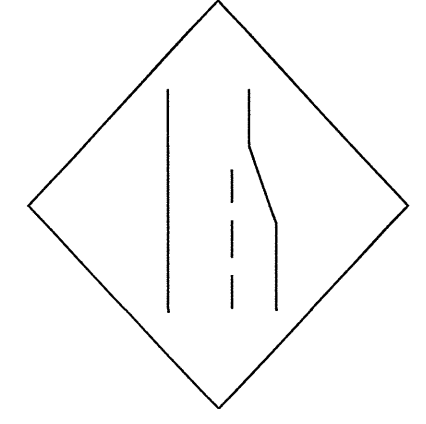



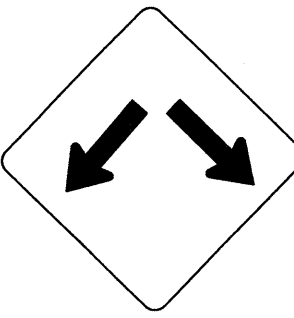
SHEET NO.	DESCRIPTION
SIGN - 1	TITLE SHEET - SUMMARY OF QUANTITIES, ROADWAY STANDARD DRAWINGS, INDEX, & NOTES
SIGN - 2	TYPE "E" SIGNS
SIGN - 3 - 6	SIGN DETAIL SHEETS

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

AYMAN ALQUDWAH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER
ERIC WARD SIGNING & DELINEATION DESIGN ENGINEER

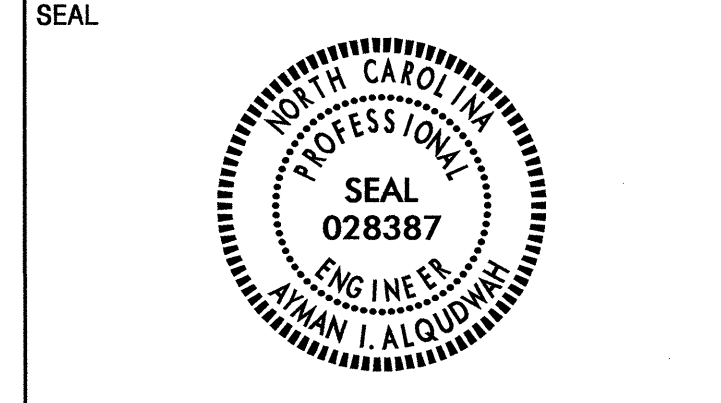

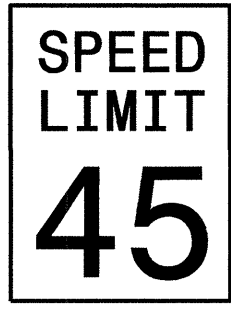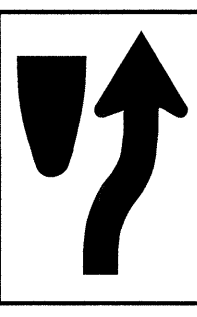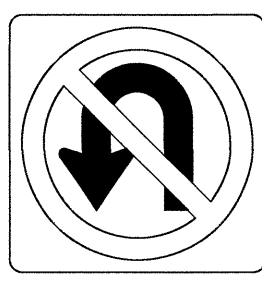


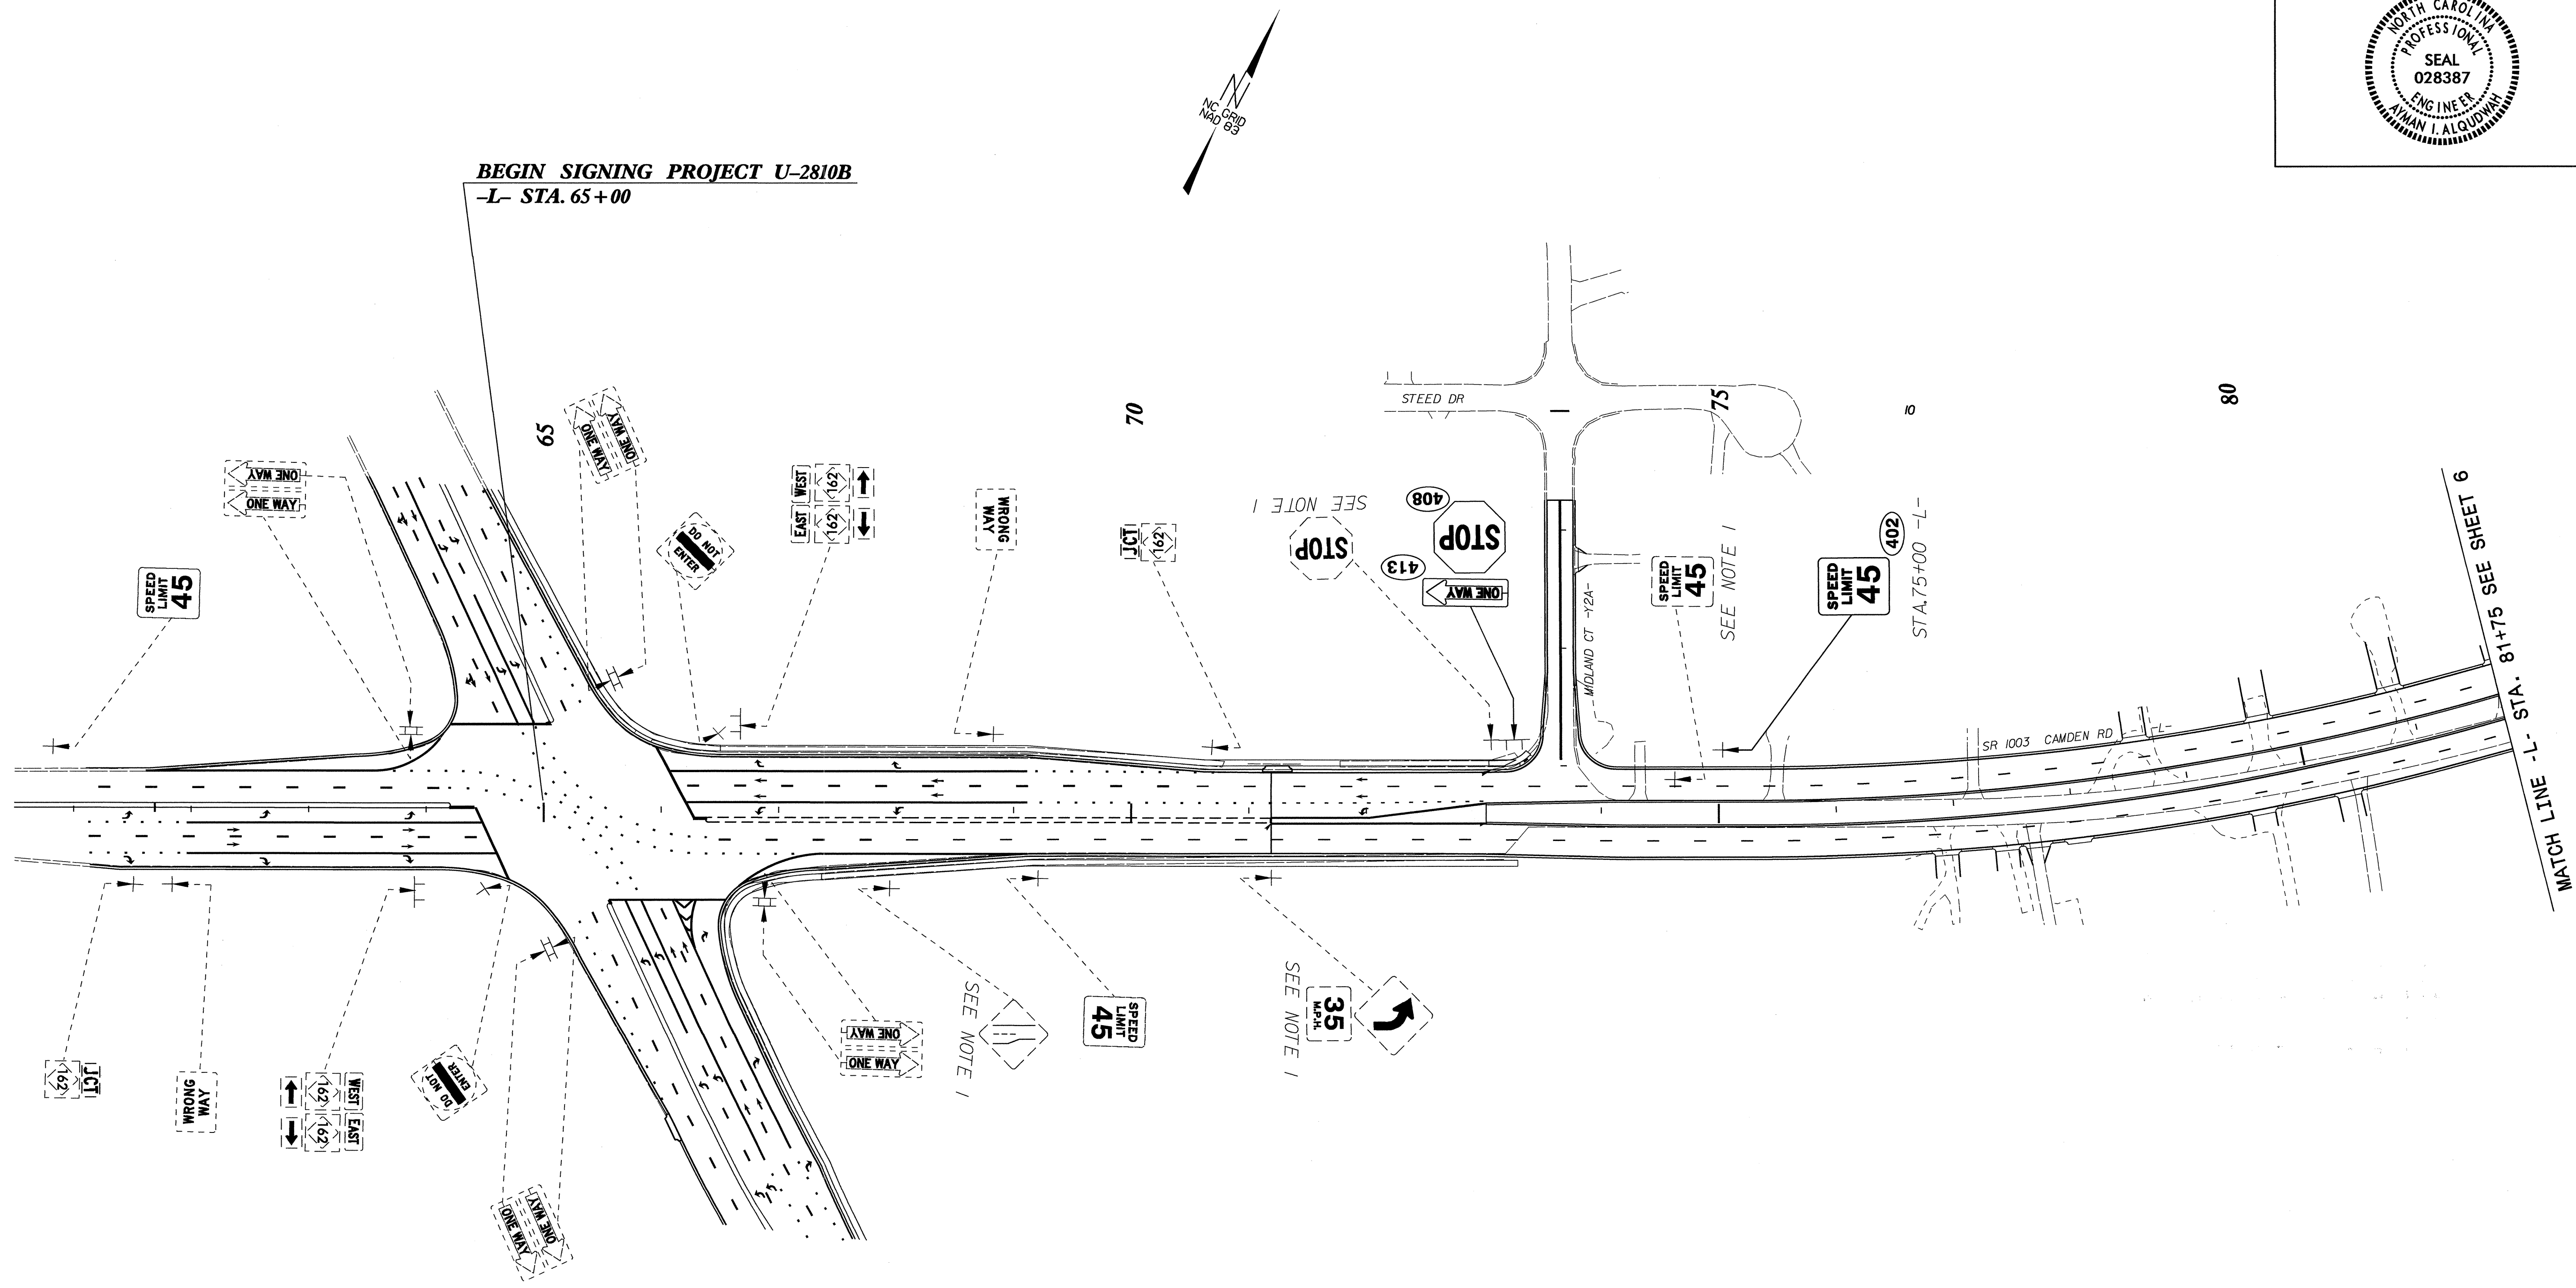
<p>402 QUANTITY REQ'D <u> 5 </u></p>  <p>30 X 36 R2-1</p> <p>ONE "U" POST PER SIGN</p>	<p>415 QUANTITY REQ'D <u> 4 </u></p>  <p>24 X 30 R4-7</p> <p>ONE "U" POST PER SIGN</p>	<p>470 QUANTITY REQ'D <u> 4 </u></p>  <p>24" X 24" R3-4</p> <p>ONE "U" POST PER SIGN</p>			
<p>408 QUANTITY REQ'D <u> 9 </u></p>  <p>36 X 36 R1-1</p> <p>MOUNT BELOW SIGN 413 IN 7 INSTALLATIONS</p>	<p>417 QUANTITY REQ'D <u> 4 </u></p>  <p>18 X 18 W23-15</p> <p>MOUNT BELOW SIGN 416 IN 8 INSTALLATIONS</p>	<p>472 QUANTITY REQ'D <u> 1 </u></p>  <p>48 X 48 W9-2 (R)</p> <p>TWO "U" POSTS PER SIGN</p>			
<p>409 QUANTITY REQ'D <u> 2 </u></p>  <p>30" X 30" R1-1</p> <p>ONE "U" POST PER SIGN</p>	<p>438 QUANTITY REQ'D <u> 3 </u></p>  <p>30 X 30 W3-3</p> <p>ONE "U" POST PER SIGN</p>	<p>474 QUANTITY REQ'D <u> 1 </u></p>  <p>48 X 48 W4-2 (R)</p> <p>TWO "U" POSTS PER SIGN</p>			
<p>413 QUANTITY REQ'D <u> 8 </u></p>  <p>54 X 18 R6-1 (R)</p> <p>TWO "U" POSTS PER SIGN MOUNT BACK TO BACK WITH SIGN 414 IN 1 LOCATION</p>	<p>457 QUANTITY REQ'D <u> 6 </u></p>  <p>30 X 30 W14-1</p> <p>ONE "U" POST PER SIGN</p>				
<p>414 QUANTITY REQ'D <u> 5 </u></p>  <p>54 X 18 R6-1 (L)</p> <p>TWO "U" POSTS PER SIGN</p>	<p>462 QUANTITY REQ'D <u> 6 </u></p>  <p>36 X 36 W12-1</p> <p>ONE "U" POST PER SIGN</p>				

TYPE "E" SIGNS

23-AUG-2012 11:26 AM U:\2810B\Traffic\Signing\CADD\Signing Layout Plans\2810b_sgn_tsh.dgn
 erleward - 11227905

TIP NO. U-2810B	SHEET NO. SIGN-3
APPROVED: <i>[Signature]</i>	
DATE: 8/24/12	
SEAL	
	



BEGIN SIGNING PROJECT U-2810B
-L- STA. 65+00



21-AUG-2012 09:42
 P:\Projects\U2810B\Traffic\Signing\CADD\Signing Layout Plans\U2810b_sgn_psh3.dgn
 ericward AT TE247905

SIGNING DETAIL


TIP NO. U-28108	SHEET NO. SIGN-4
APPROVED: <i>[Signature]</i>	
DATE: 8/24/12	
SEAL	

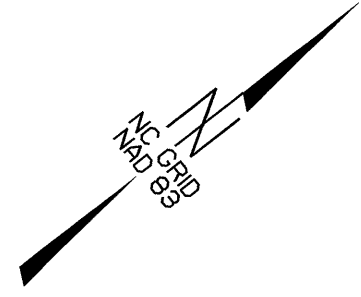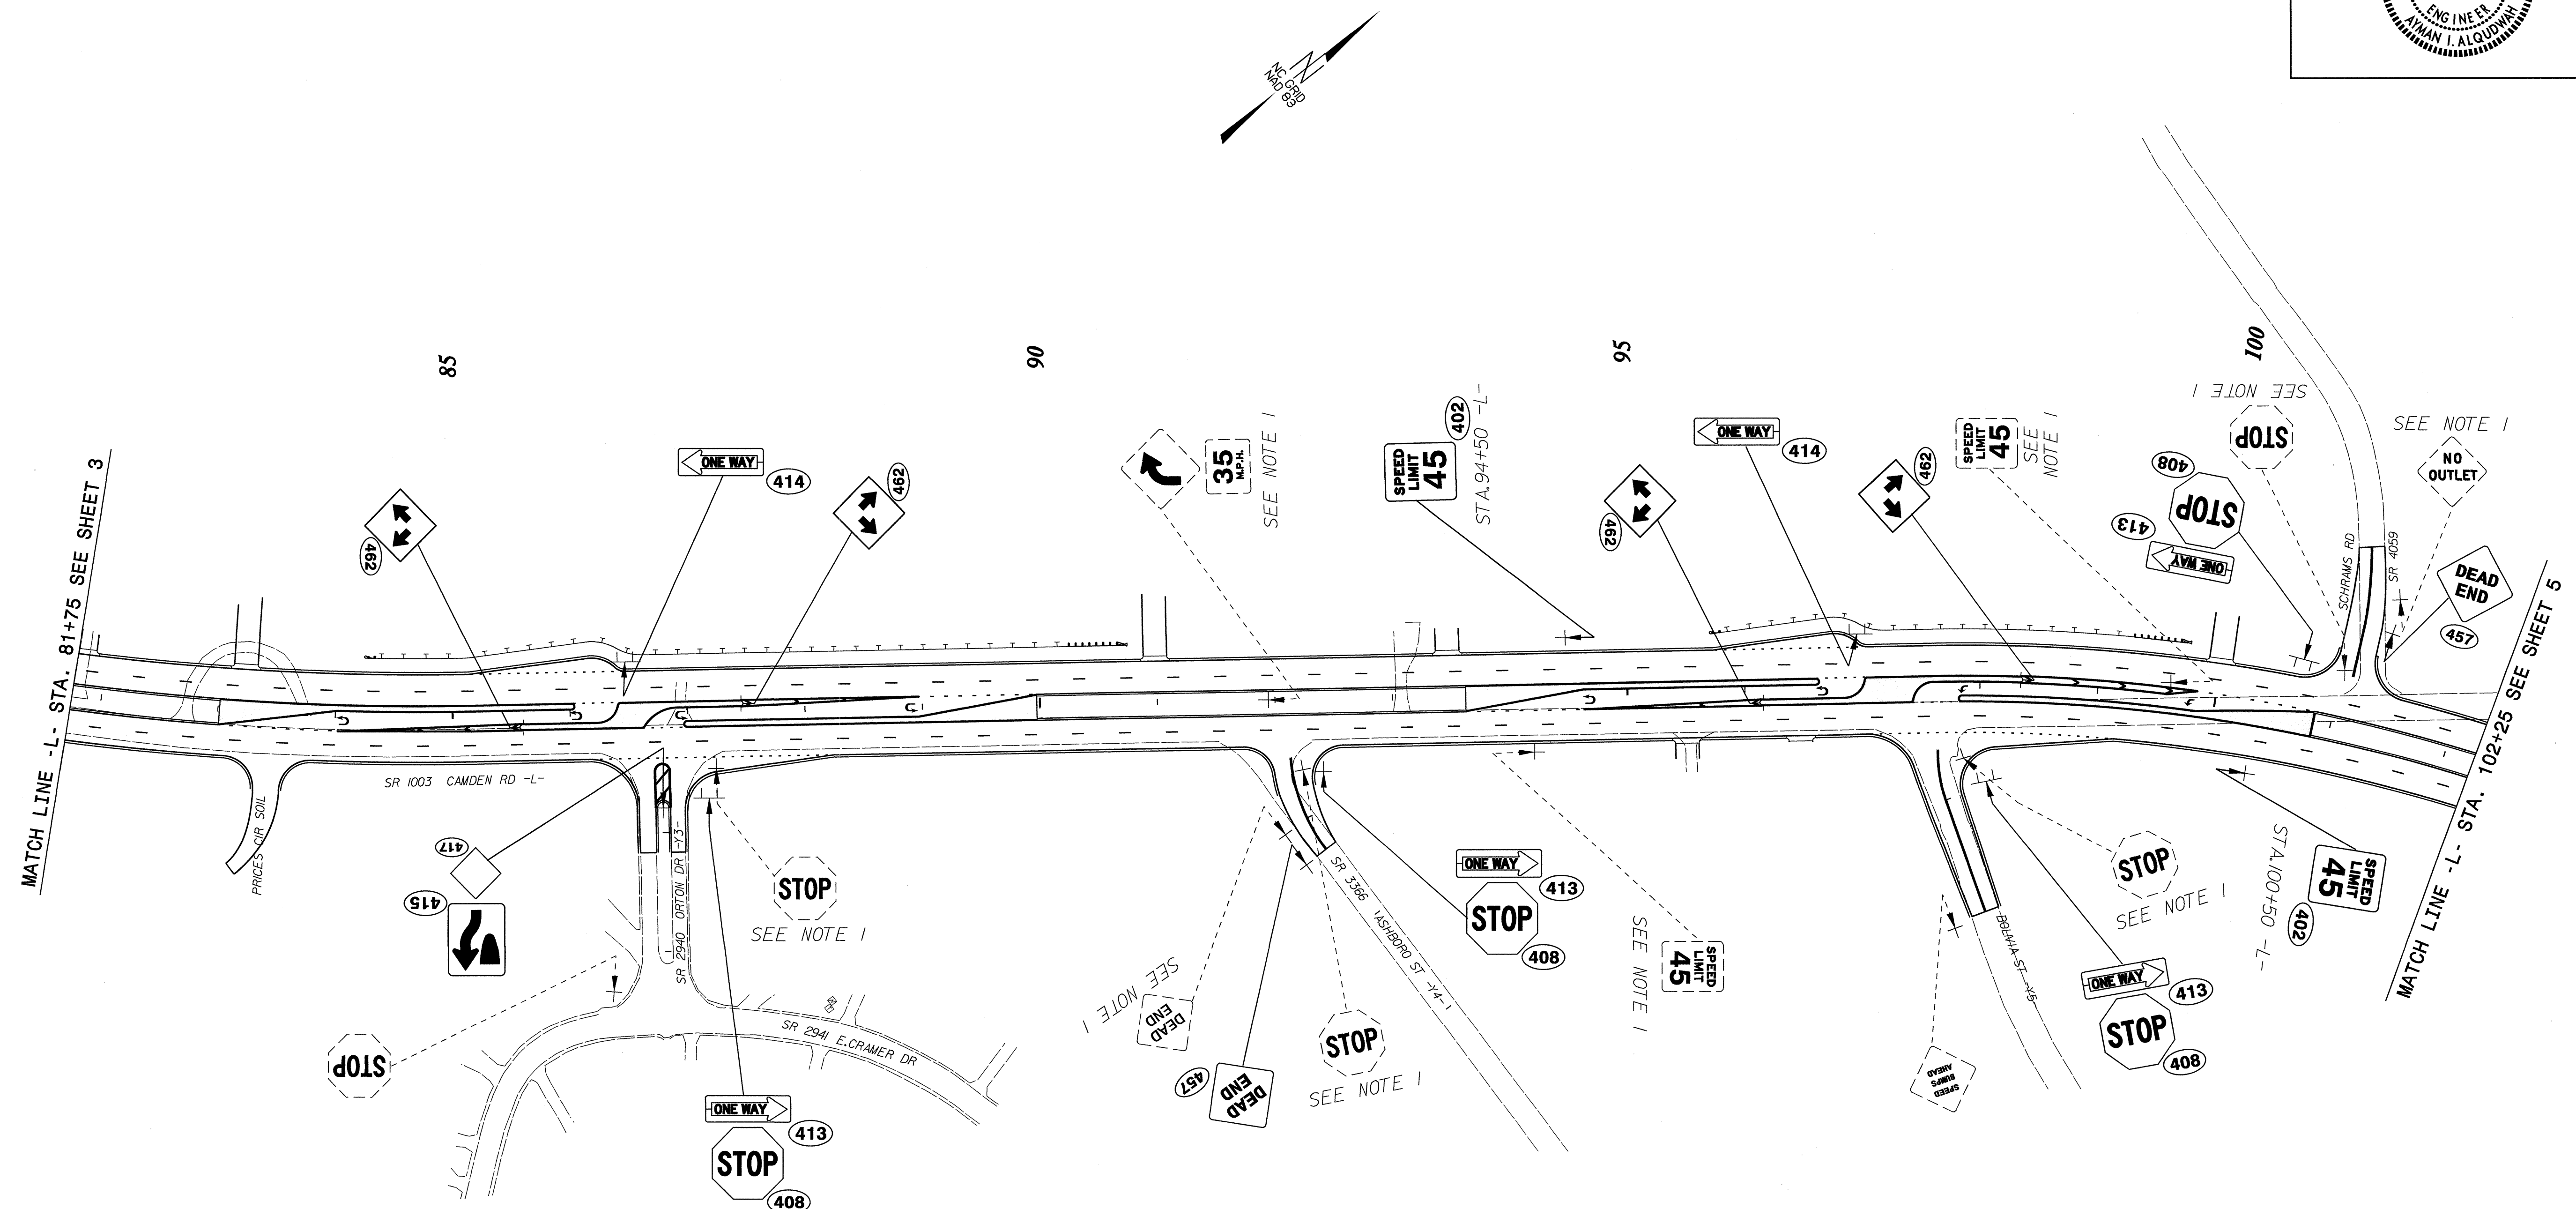

2-AUG-2012 09:43
 P:\Projects\U-28108\Traffic\Signing\CADD\Signing Layout Plans\U28108b_sgn_psh4.dgn
 ericward AT TE247905


SIGNING DETAIL


TIP NO. U-2810B	SHEET NO. SIGN-5
APPROVED: <i>[Signature]</i>	
DATE: 8/24/12	
SEAL	

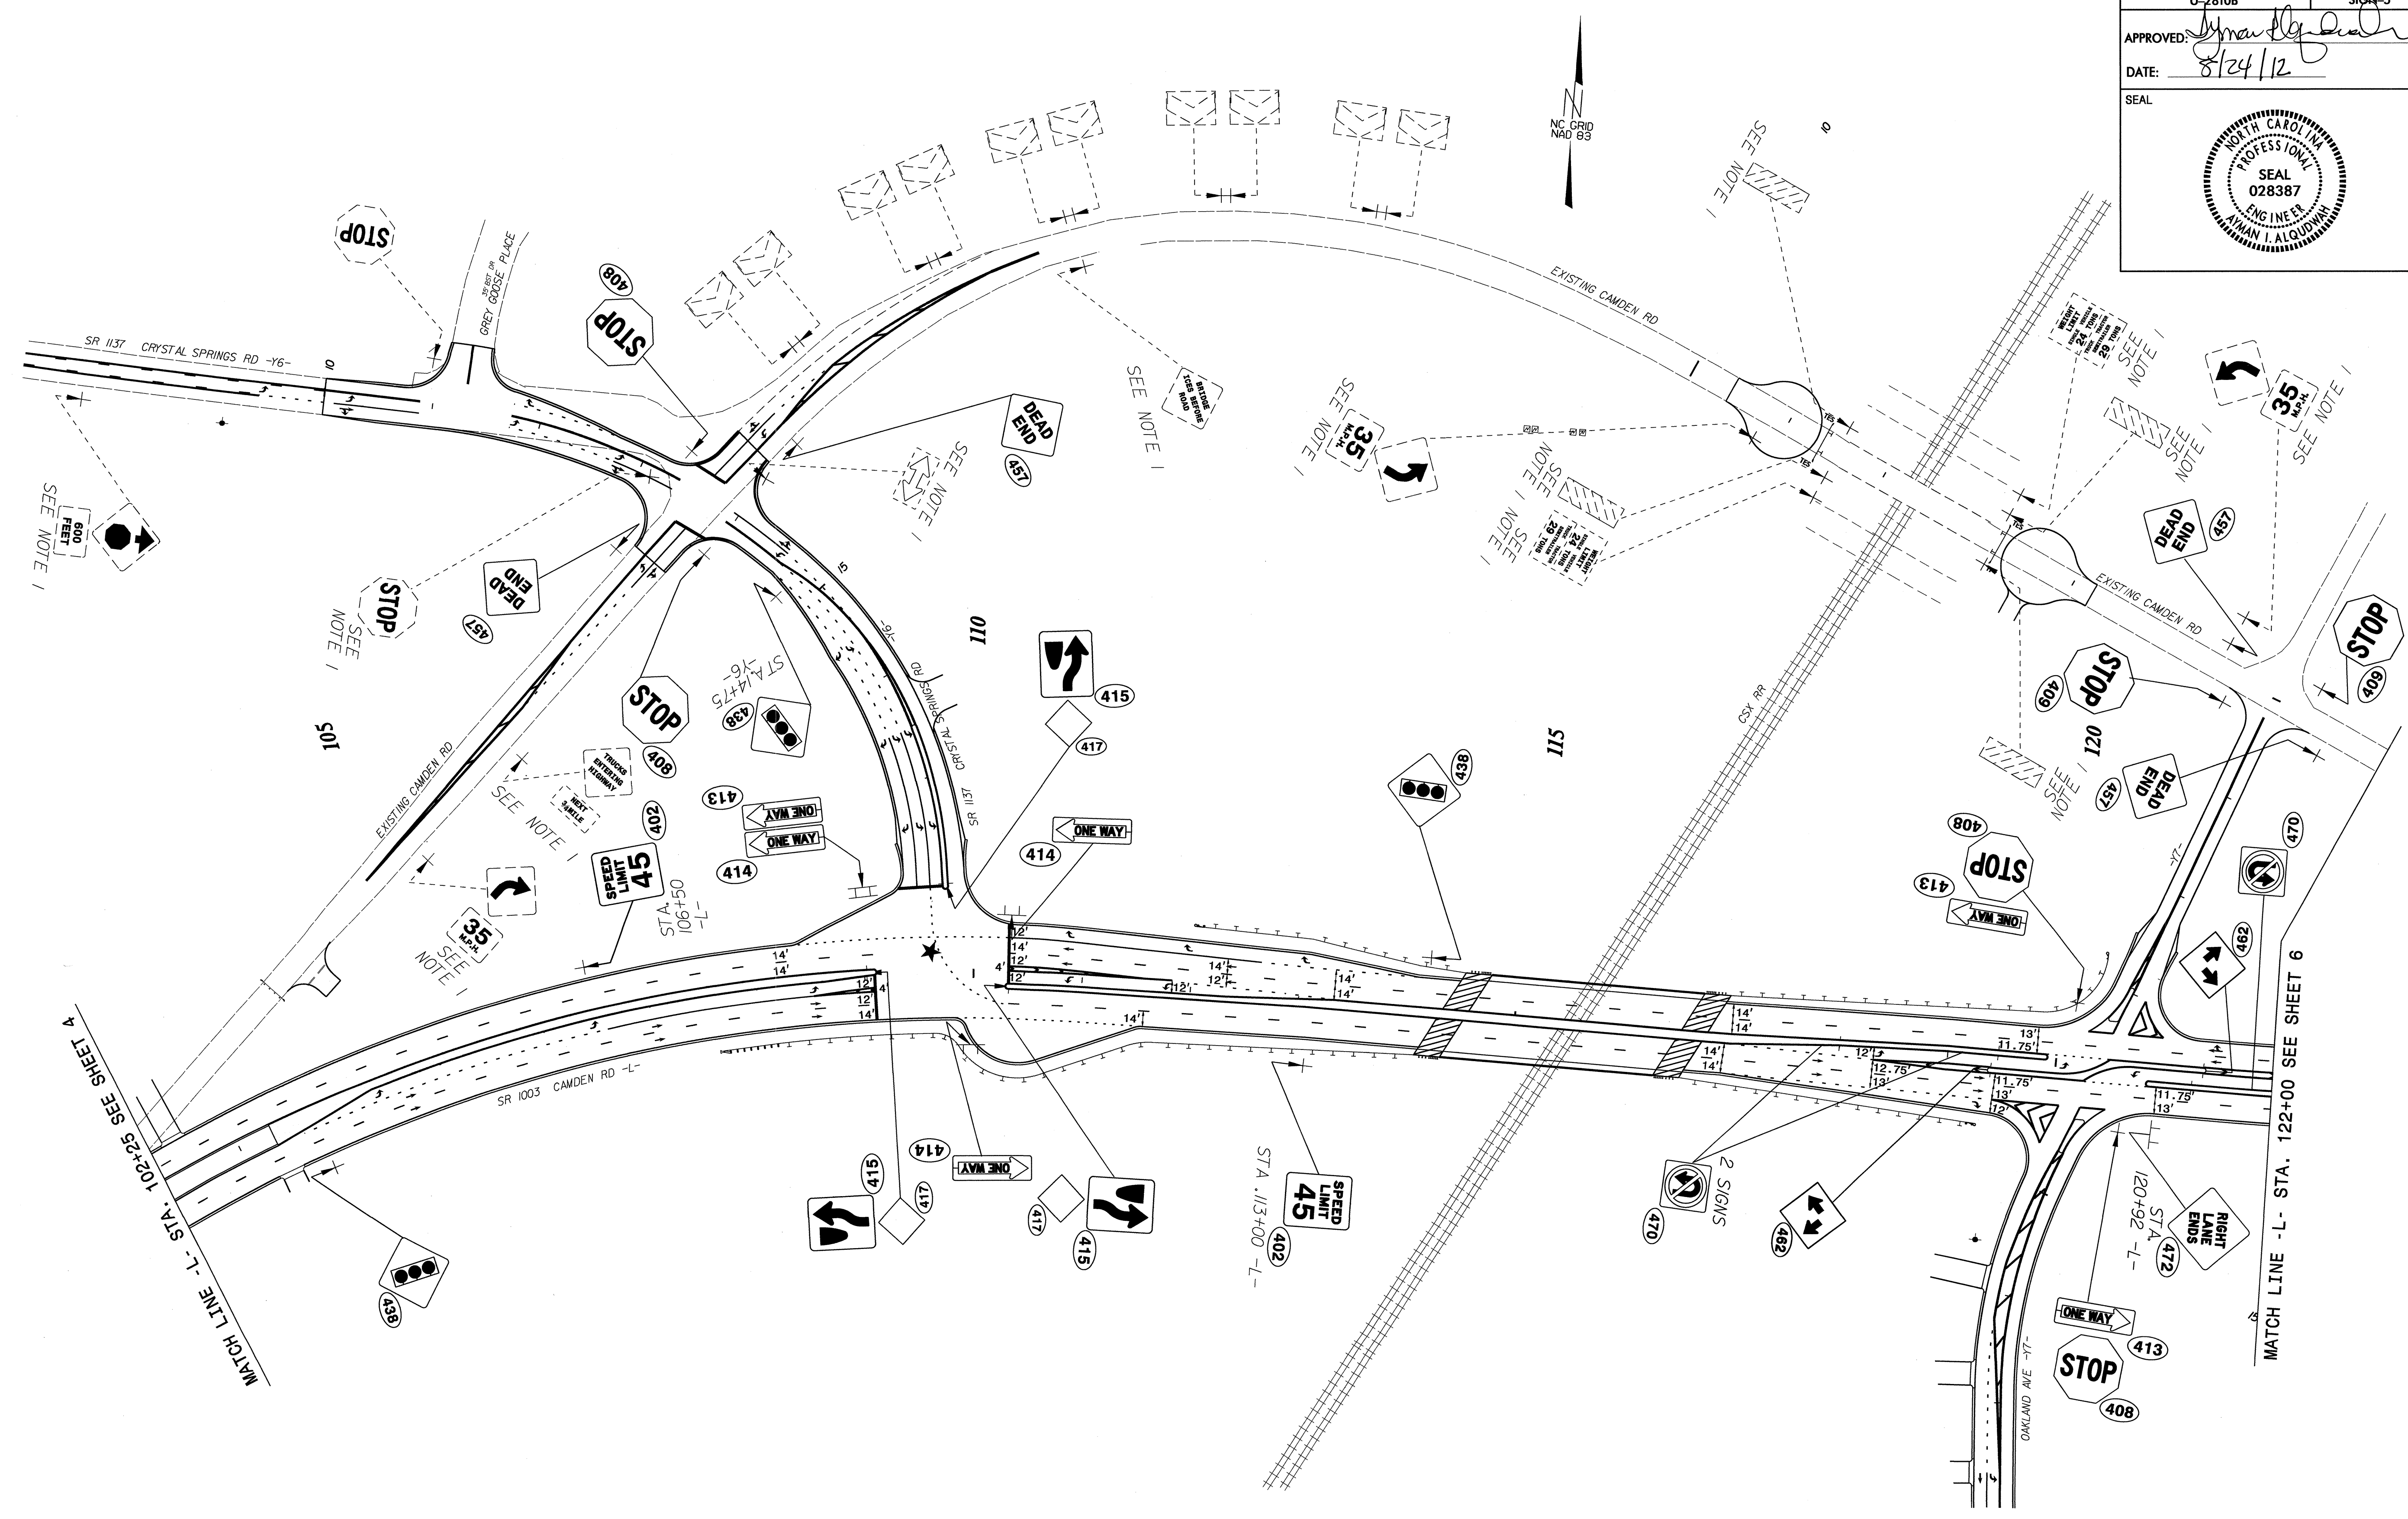

SIGNING DETAIL

24-AUG-2012 10:26 U:\2810B\Traffic\Signing\CADD\Signing Layout\Plans\2810b-sgn-psh5.dgn
 24-AUG-2012 10:26 U:\2810B\Traffic\Signing\CADD\Signing Layout\Plans\2810b-sgn-psh5.dgn
 ericward AT 12/24/12

TIP NO. U-2810B	SHEET NO. SIGN-6
APPROVED: <i>[Signature]</i>	
DATE: 8/24/12	
SEAL	
	

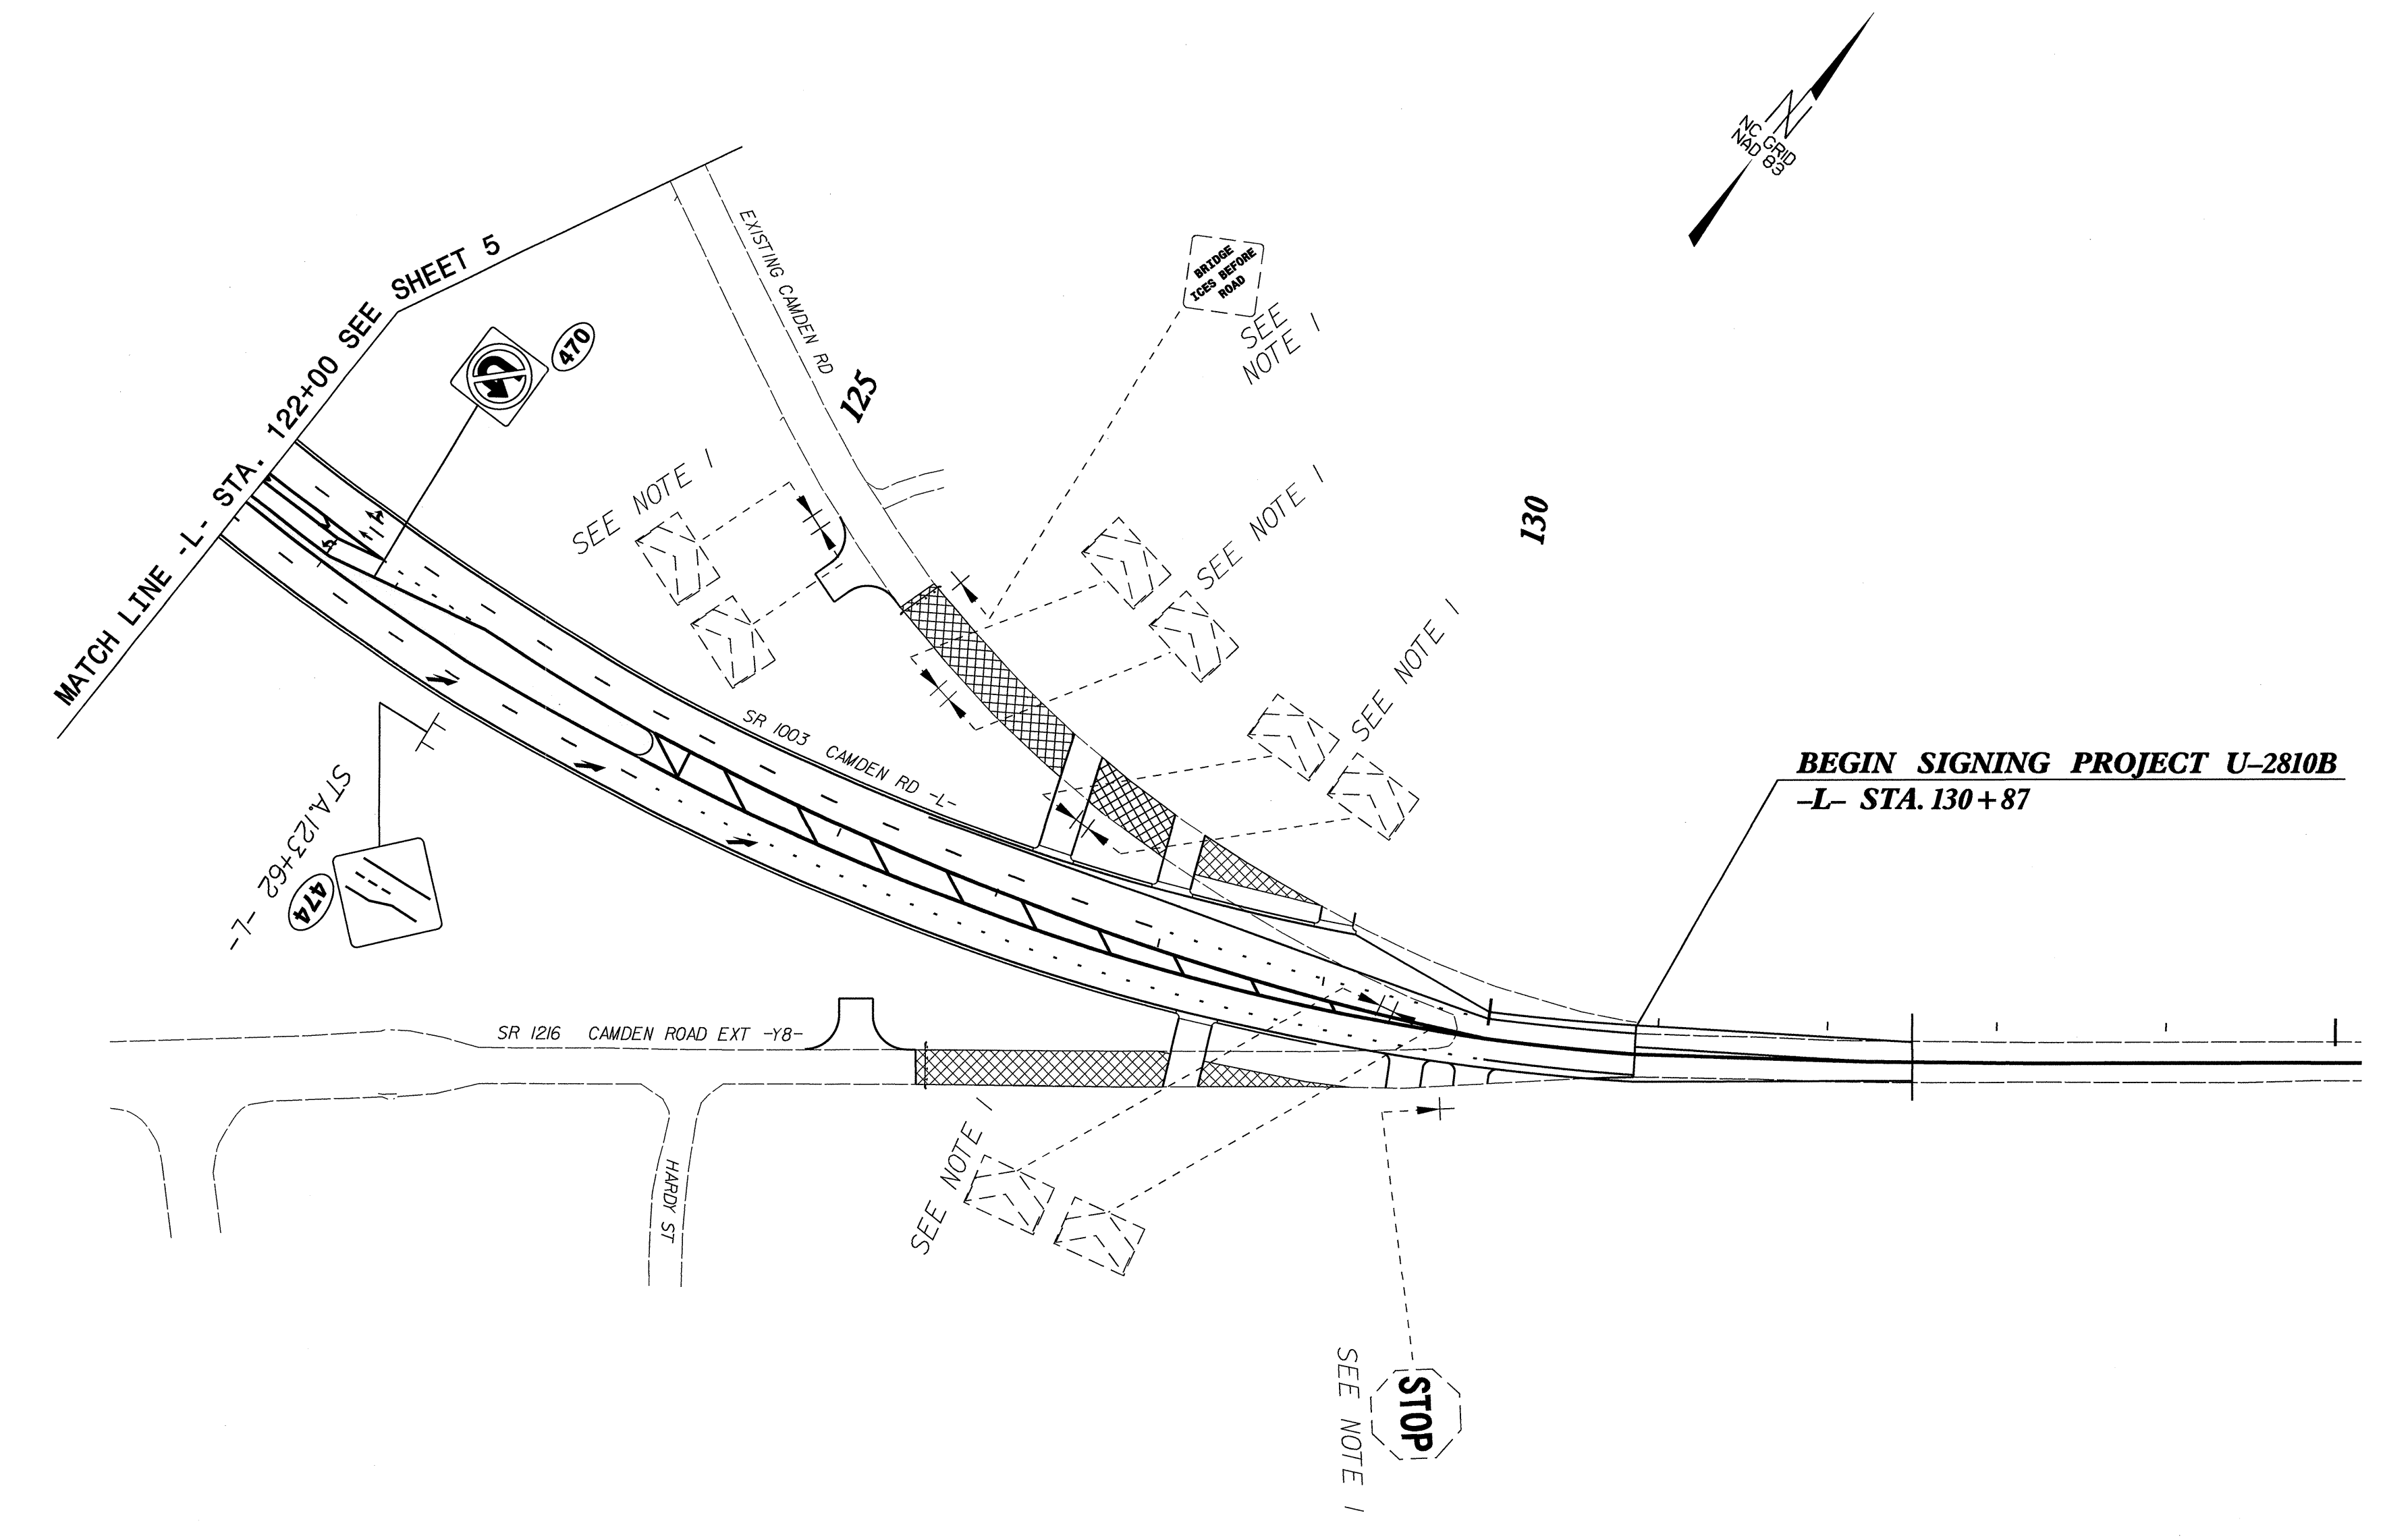

BEGIN SIGNING PROJECT U-2810B
-L- STA. 130+87

SIGNING DETAIL