96 2

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

TIP NO.	SHEET NO.
B-4987	SIGN-1
APPROVED:	W/7 18/12

SIGNING PLAN HENDERSON COUNTY

LOCATION: BRIDGE No. 35 OVER CLEAR CREEK ON SR 1572 (APPLE VALLEY RD)

-	1 1917	
-	SEAL 022959 WE KING THE FRANCE OF THE PARTY	

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.

TITLE

904.10 904.50 ORIENTATION OF GROUND MOUNTED SIGNS

MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


PROJECT NOTES

1 DISPOSAL OF SIGN SYSTEM, U-CHANNEL

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

		SUMMARY OF QUANTITIES		
		SUMMART OF QUARTITIES		
ITEM	NO.	ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
07200000 10200000 155000000	903 904 907	SUPPORTS, 3 LB STEEL U-CHANNEL SIGN ERECTION, TYPE E DISPOSAL OF SIGN SYSTEM, U-CHANNEL	30 2 8	L.F. EA. EA.

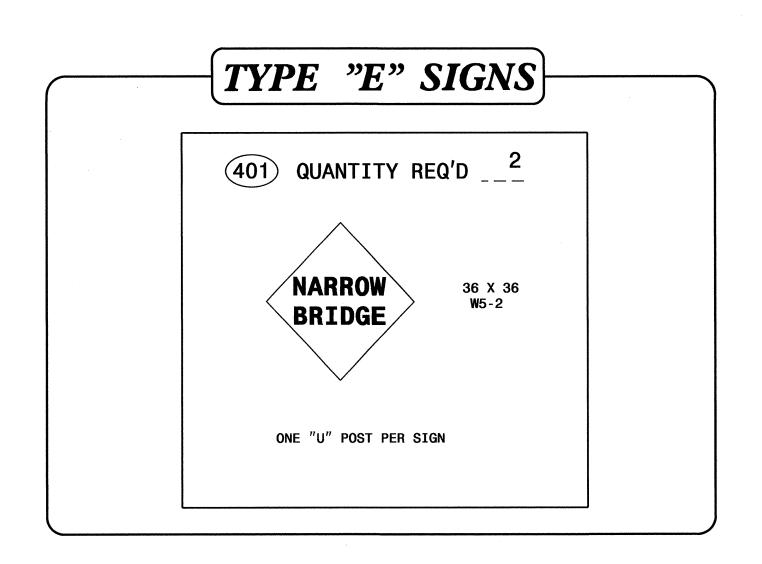

INDEX

SHEET NO.

DESCRIPTION

SIGN-1

TITLE SHEET, TYPE E SIGN

SIGN-2

SIGNING PLAN SHEET

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

K. L. JORDAN SIGNING & DELINEATION REGIONAL ENGINEER

