
STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

SIGNING PLAN JOHNSTON COUNTY

LOCATION: BRIDGE NO. 147 OVER SWIFT CREEK ON SR 1525

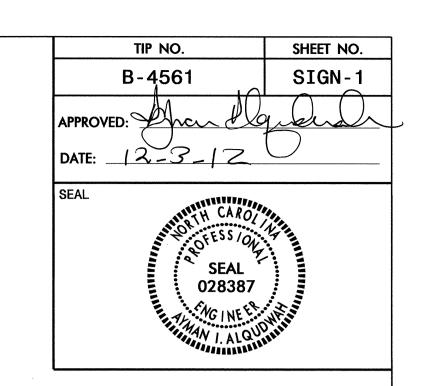

SUMMARY OF QUANTITIES

ITEM NO.		TTEM DECODEDETON	OHANTTTV	LINITT
DESC. NO.	SECT. NO.	ITEM DESCRIPTION	QUANTITY	UNIT
4072000000 4102000000 4155000000	904	SUPPORTS, 3 LB STEEL U-CHANNEL SIGN ERECTION, TYPE E DISPOSAL OF SIGN SYSTEM, U-CHANNEL	26 2 8	L.F. EA. EA.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" -PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.

TITLE

904.10

ORIENTATION OF GROUND MOUNTED SIGNS

904.50

MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

NOTES

1) DISPOSAL OF SIGN SYSTEM, U CHANNEL

INDEX

SHEET NO.

DESCRIPTION

SIGN-1

TITLE SHEET

SIGN-2

SIGN DETAIL SHEET

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

AYMAN ALQUDWAH, PE, CPM, SIGNING & DELINEATION REGIONAL ENGINEER

BASIR A. RASHID

SIGNING & DELINEATION PROJECT DESIGN ENGINEER

