08

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION

TIP NO.	SHEET NO.
P-5208F	SIGN-1
APPROVED: Bl. L. Mar.	
DATE: 2/2//13	

SIGNING PLAN CABARRUS COUNTY

INDEX

SHEET NO.

DESCRIPTION

SIGN-1 SIGN-2 TITLE SHEET SIGNING PLAN SHEET

GENERAL NOTES

- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL $^{\prime}\text{E}^{\prime}$ AND $^{\prime}\text{F}^{\prime}$ SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
- WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE

STD. NO.

TITLE

904.50

MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

SUMMARY OF QUANTITIES ITEM DESCRIPTION QUANTITY UNIT ITEM NO. DESC. SECT. NO. 4072000000 SUPPORTS, 3 LB. STEEL U-CHANNEL SIGN ERECTION, TYPE E 4102000000 4155000000 DISPOSAL OF SIGN SYSTEM, U-CHANNEL SF CONTRACTOR FURNISHED, TYPE 'E' SIGN 6.25 4025000000

PLAN REVIEWED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT


KELVIN JORDAN SIGNING & DELINEATION STANDARDS ENGINEER

JOSE MARTINEZ SIGNING & DELINEATION PROJECT DESIGN ENGINEER



PLAN PREPARED BY: WETHERILL ENGINEERING

BOB MAY, P.E. ROADWAY PROJECT ENGINEER CHARLES MULLEN TRAFFIC CONTROL SPECIALIST




TIP NO. SHEET NO.

P-5208F SIGN-2

APPROVED: May DATE: 1/21/13



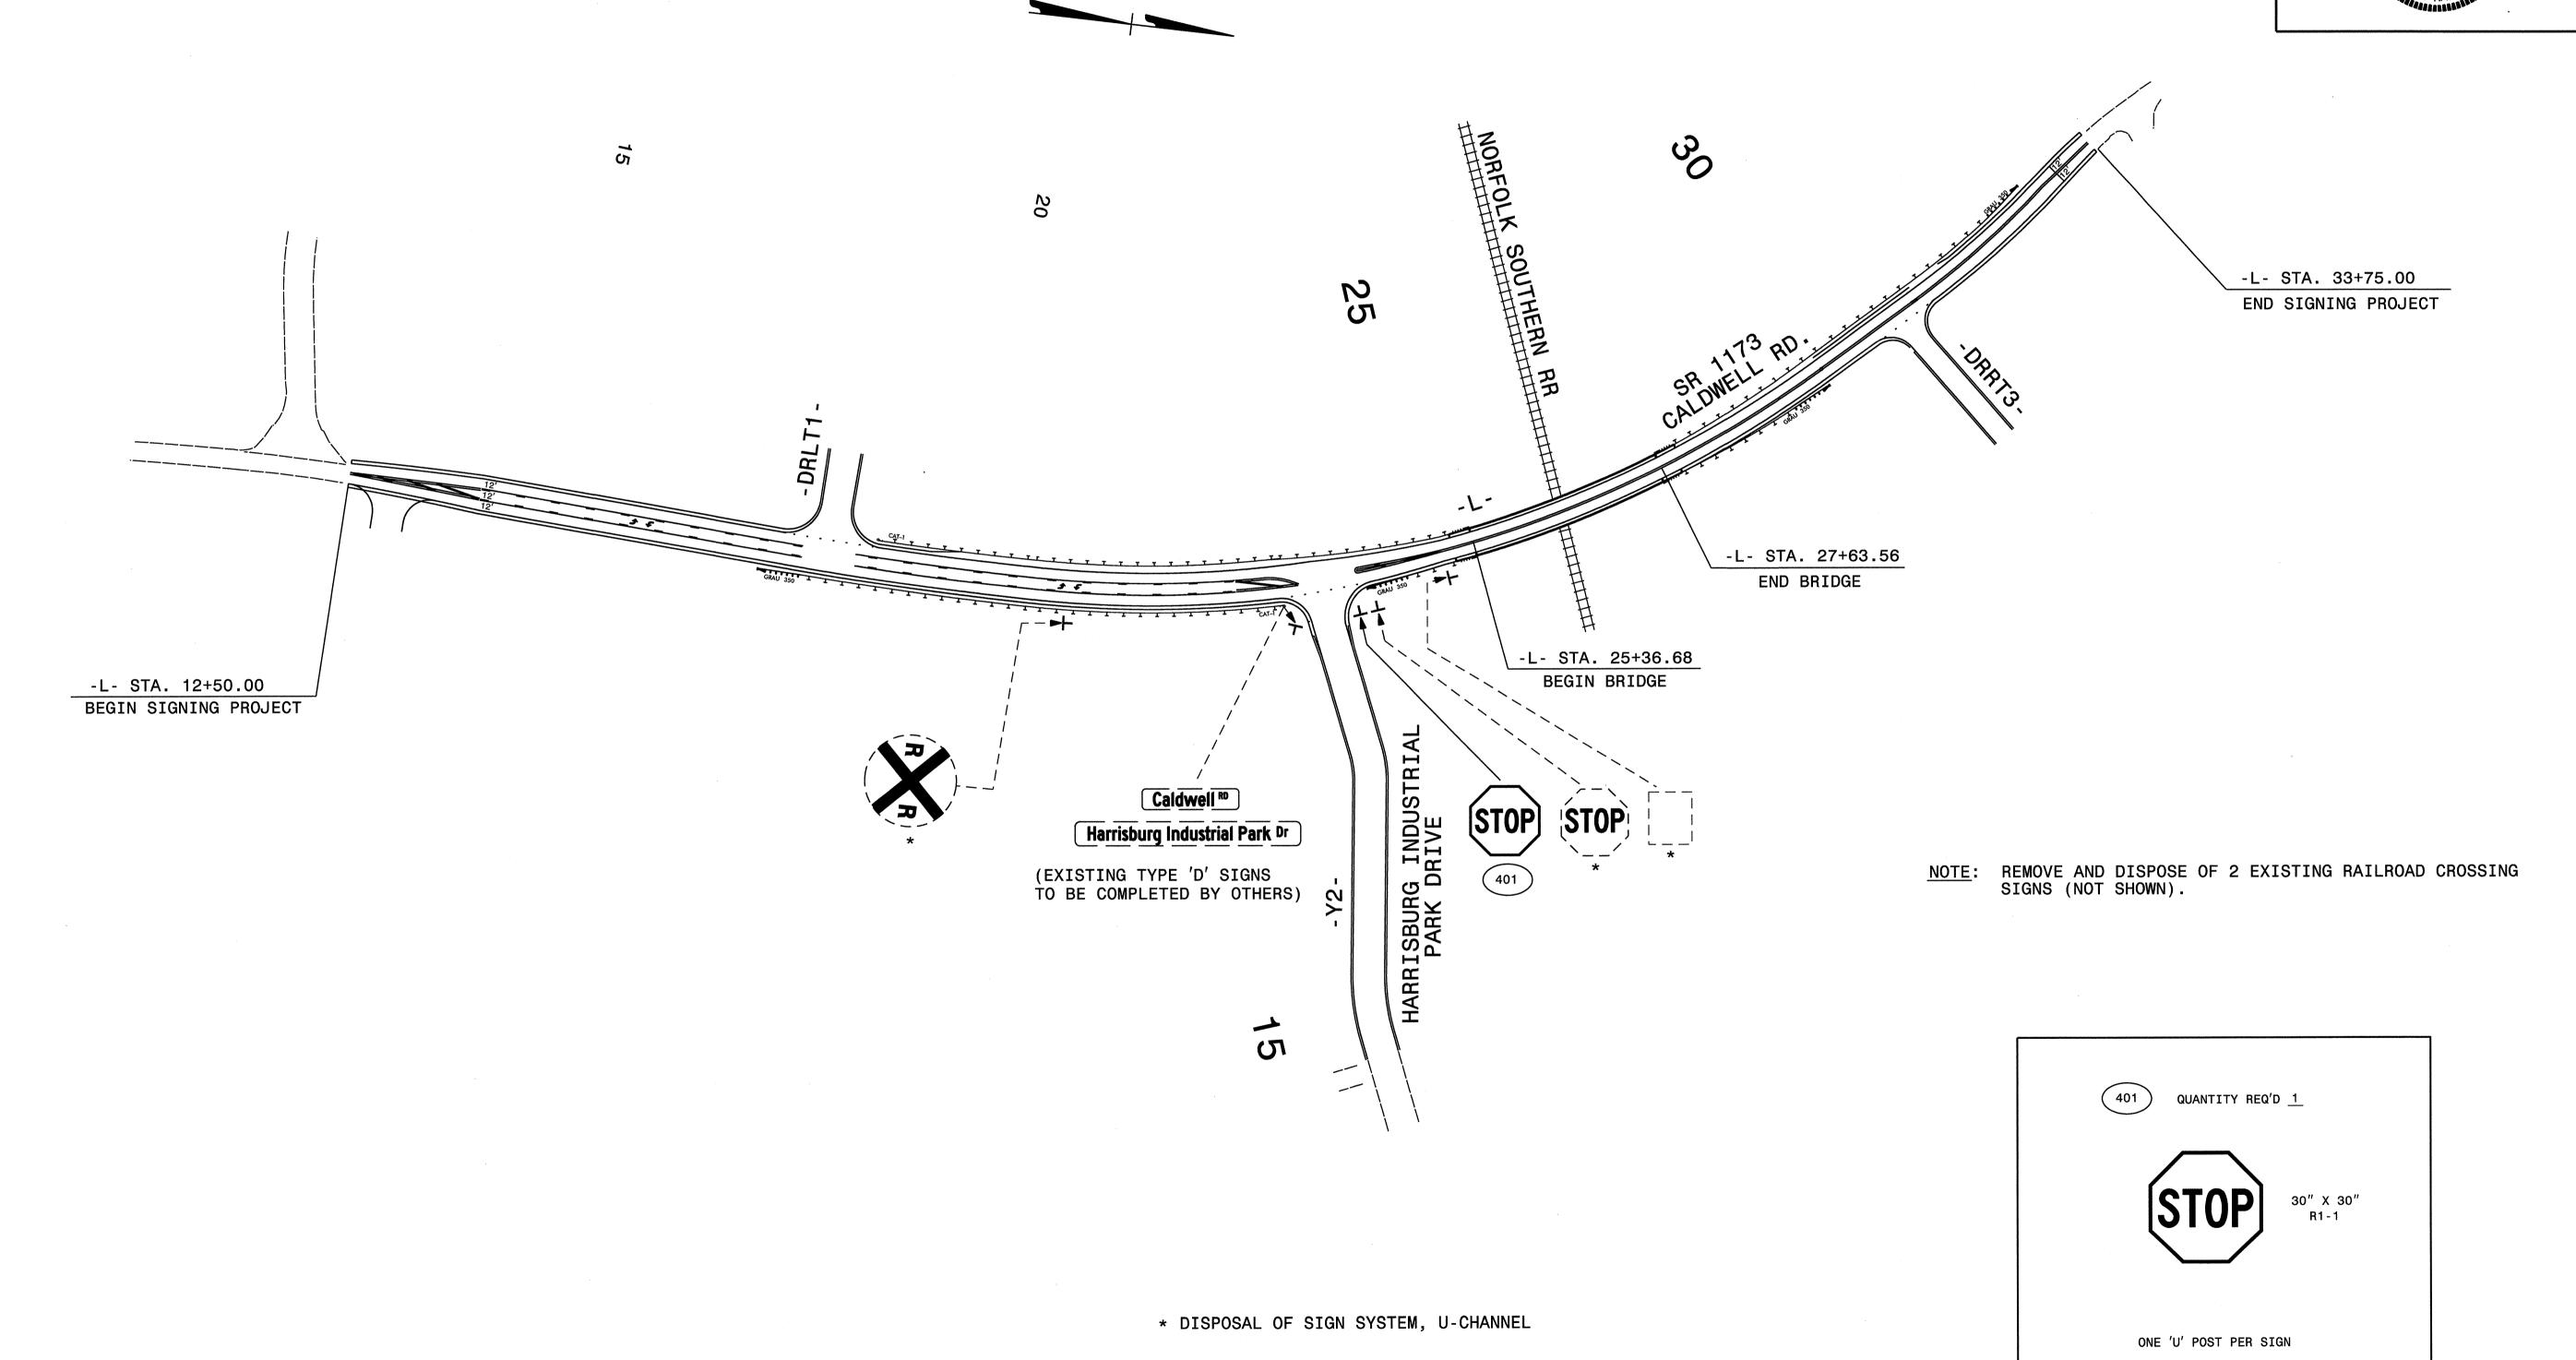

TRANSPORTATION PLANNING/DESIGN - BRIDGE/STRUCTURE DESIGN
CIVIL/SITE DESIGN - GIS/GPS - CONSTRUCTION OBSERVATION

SIGNING PLAN SHEET

|Z/ 3|/ 20|Z 8:|8:20 AM P:\20||\||04.0| P-520