

PLAN

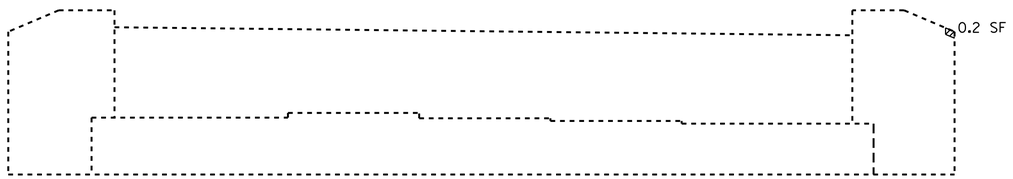

ELEVATION

END BENT 1

LOOKING AT FRONT FACE

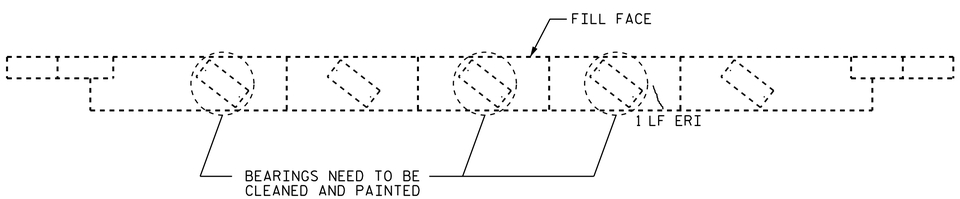

PLAN

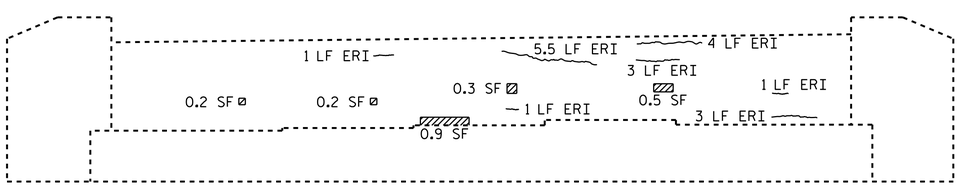

ELEVATION

END BENT 2

LOOKING AT FRONT FACE

NOTES:

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE REPAIR QUANTITY TABLE.

FOR STRUCTURE REPAIRS, SEE "TYPICAL CAP AND COLUMN REPAIR DETAILS" SHEET.

EPOXY COATING SHALL BE APPLIED TO THE TOP FACE OF THE END BENT CAP.

CONCRETE REPAIR

SHOTCRETE REPAIR

ERI – EPOXY RESIN INJECTION

REPAIR QUANTITY TABLE

REPAIRS END BENT 1	QUANTITIES			
	ESTIMATE		ACTUAL	
SHOTCRETE REPAIRS	AREA SF.	VOLUME CF.	AREA SF.	VOLUME CF.
CAP (VERTICAL FACE)	0.0	0.0		
CAP (HORIZONTAL FACE)	0.0	0.0		
CURTAIN WALL & WINGS	0.7	0.2		
CONCRETE REPAIRS	0.0	0.0		
EPOXY RESIN INJECTION		LN. FT.		LN. FT.
CAP		0.0		
CURTAIN WALL & WINGS		0.0		
EPOXY COATING		SQ. FT.		SQ. FT.
TOP OF CAP		72		

REPAIRS END BENT 2	QUANTITIES			
	ESTIMATE		ACTUAL	
SHOTCRETE REPAIRS	AREA SF.	VOLUME CF.	AREA SF.	VOLUME CF.
CAP (VERTICAL FACE)	0.9	0.2		
CAP (HORIZONTAL FACE)	0.0	0.0		
CURTAIN WALL & WINGS	1.2	0.3		
CONCRETE REPAIRS	0.0	0.0		
EPOXY RESIN INJECTION		LN. FT.		LN. FT.
CAP		1.0		
CURTAIN WALL & WINGS		18.5		
EPOXY COATING		SQ. FT.		SQ. FT.
TOP OF CAP		72		

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MIN. OF 1" BEHIND REBAR AND MIN. 1" CL TO SAWCUT. SEE REPAIR DETAILS.

PROJECT NO. I-0914BB

WARREN COUNTY

BRIDGE NO.: 51

NORTH CAROLINA PROFESSIONAL SEAL 16301 ENGINEER TING HSILING FANG

DocuSigned by: Ting H. Fang
E72088400977435...

12/18/2014

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

SUBSTRUCTURE REPAIR
END BENTS 1 & 2

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	SP-23
1			3			TOTAL SHEETS
2			4			28

DRAWN BY : T. KIRSCHBAUM DATE : 10/2013
CHECKED BY : T. H. FANG DATE : 11/2013

17-DEC-2014 10:05
K:\TIPProjects-1\I0914BB\Structures\Preservation\FinalPlans\bdg51_prep_planf.dgn
ttfang