


TOTAL BILL OF MATERIAL

BRIDGE NO.	GROOVING BRIDGE FLOORS	POLLUTION CONTROL	CLASS II SURFACE PREPARATION	FOAM JOINT SEALS	CLEANING & REPAINTING OF EXISTING STRUCTURAL STEEL BRIDGE*-----	PAINTING CONTAINMENT FOR BRIDGE*-----	LATEX MODIFIED CONCRETE- VERY EARLY STRENGTH	BRIDGE JOINT DEMOLITION	EPOXY OVERLAY SYSTEM	HYDRO-DEMOLITION OF BRIDGE DECK	PLACING & FINISHING LATEX MODIFIED CONCRETE- VERY EARLY STRENGTH	SCARIFYING BRIDGE DECK
	SO.FT.	LUMP SUM	SO.YD.	LUMP SUM	LUMP SUM	LUMP SUM	CU.YD.	SO. FT.	SO. FT.	SO.YD.	SO.YD.	SO.YD.
144	5,616	LUMP SUM	7.2	LUMP SUM	LUMP SUM	LUMP SUM	44	98	-	704	704	704
145	5,616	LUMP SUM	7.2	LUMP SUM	LUMP SUM	LUMP SUM	44	98	-	704	704	704
146	9,214	LUMP SUM	11.4	LUMP SUM	LUMP SUM	LUMP SUM	72	208	-	1,157	1,157	1,157
147	-	-	-	-	-	-	-	-	28,600	-	-	-
TOTAL	20,446	LUMP SUM	25.8	LUMP SUM	LUMP SUM	LUMP SUM	160	404	28,600	2,565	2,565	2,565

PROJECT NO. I-5308
ROBESON COUNTY
 BRIDGE NO. 144, 145, 146&147

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

**STRUCTURE
 TOTAL BILL
 OF MATERIAL**

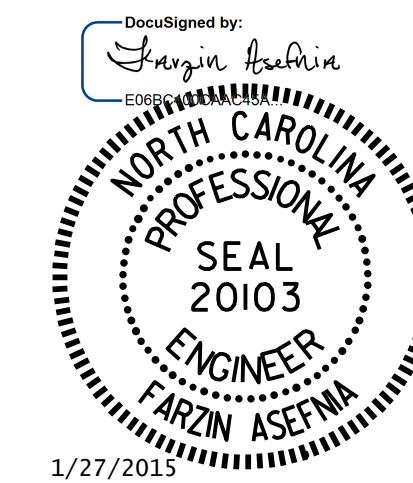

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-1
1			3			TOTAL SHEETS
2			4			23

DRAWN BY : J. YANNACCONE DATE : 03/14
 CHECKED BY : F. ASEFNIA DATE : 03/14