DocuSign Envelope ID: 3269F676-58A7-4DF9-A107-20541A988F53

PROJECT REFERENCE NO.	SHEET NO.
U-2524BC	2C-1

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

SHEET 4 OF 7
862D03

ENGLISH DETAIL DRAWING FOR
GUARDRAIL ANCHOR UNIT
GUARDRAIL ANCHOR UNIT TYPE B-77
FOR F-SHAPE BARRIER

ELEVATION

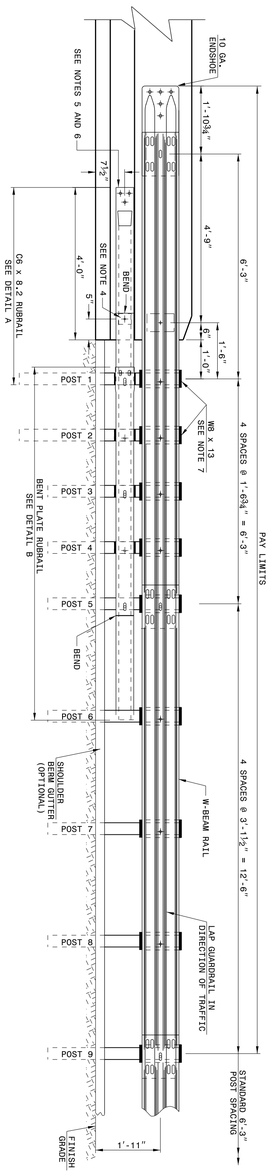

GENERAL NOTES:
1) THIS DESIGN REQUIRES AN ADDITIONAL HOLE TO ATTACH LOWER BLOCKOUTS AND/OR RUBRAIL.
2) RUBRAIL BLOCKOUTS LOCATED ON POSTS THROUGH 4 ARE OFFSET VERTICALLY AND GROUPED WITH 5⅝" BUTTONHEAD BOLTS (SEE CHART FOR BOLT LENGTHS). SECURE BLOCKS ONLY TO POSTS 2 AND 4. SECURE RUBRAIL AND BLOCKOUTS TO POSTS 1 AND 3. RUBRAIL IS SECURED WITH A 5⅝" x 4½" BUTTONHEAD BOLT. RUBRAIL IS FLARED TO BACK OF POST 6 AND NOT SECURED.
3) STEEL SPACER TUBE IS A SCHEDULE 40 GALVANIZED PIPE 6" INSIDE DIAMETER x 9" LONG. ATTACH TUBE TO GUARDRAIL ONLY WITH A 5⅝" x 4½" BUTTONHEAD BOLT AND GALVANIZED PLATE WASHER.
4) SEE DETAIL D FOR SLOPED RUBRAIL BLOCKOUT. BLOCKOUT IS ATTACHED TO RAIL ELEMENT ONLY. USE ⅜" x 3" LAG BOLT WITH FLAT WASHER.
5) SHOP FABRICATE THE C6 x 8.2 RUBRAIL END TO BE CONSISTENT WITH THE SLOPE OF THE F SHAPE AND ATTACH FLUSH WITH THE SLOPED TOE OF THE BARRIER OR BRIDGE RAIL.
6) ANCHORAGE:
   (a) FOR EXISTING BRIDGE RAIL AND NEW OR EXISTING BARRIERS, ANCHOR RUBRAIL USING THREE ⅝" x 6" CHEMICALLY ANCHORED BOLTS WITH WASHERS. MAXIMUM PROJECTION FOR BOLTS IS 1½". ANCHOR THE W-BEAM END SHOE USING A 4 BOLT HOLD DOWN PLATE (SEE STD. DWG. 862.04).
   (b) AT EXISTING BRIDGE RAIL AND NEW OR EXISTING BARRIERS, ANCHOR THE W-BEAM END SHOE USING A 4 BOLT INSERT ASSEMBLY IS ALLOWED ON PRECAST REINFORCED CONCRETE BARRIER (SEE STD. DWG. 857.01). INSTALL THE W-BEAM END SHOE BEHIND THE NESTED W-BEAM ELEMENTS.
   (c) INSTALL THE BRIDGE RAIL ANCHOR UNIT AS DETAILED ON THE STRUCTURE PLANS.
7) POSTS 1 AND 2 ARE W8 x 13, 7'-6" LONG. ALL OTHER POSTS IN THE ANCHOR UNIT ARE W6 x 8.5.

PLAN

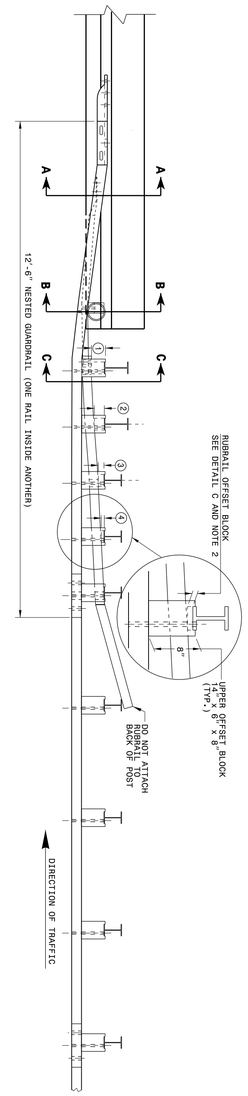

GUARDRAIL ANCHOR UNIT TYPE B-77

SHEET 4 OF 7
862D03

ENGLISH DETAIL DRAWING FOR
STRUCTURE ANCHOR UNIT
GUARDRAIL ANCHOR UNIT TYPE B-77
FOR F-SHAPE BARRIER

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

SECTION A-A



SECTION B-B

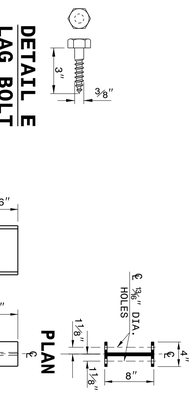

RUBRAIL BLOCKS 7" HIGH x 4" WIDE			
POST	THICKNESS	BOLT LENGTH	
①	4½"	9"	
②	3¼"	5"	*
③	2"	6"	
④	1"	3"	*

* BOLTS FOR POSTS 2 AND 4 ARE USED TO ATTACHED TO BLOCK. RUBRAIL NOT ATTACHED TO POST.

SECTION C-C



DETAIL C
RUBRAIL BLOCKOUT



DETAIL D
SLOPED RUBRAIL BLOCKOUT



FRONT
SIDE

DETAIL E
LAG BOLT

DETAIL F STEEL POST
"W8 X 13 X 7'-6"

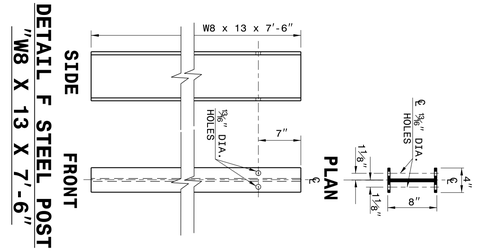

PLAN

ELEVATION

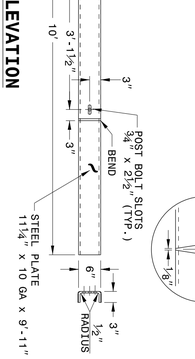

DETAIL A
C6 x 8.2 RUBRAIL

DETAIL B
BENT PLATE RUBRAIL

PLAN

ELEVATION

DETAIL B
BENT PLATE RUBRAIL

GUARDRAIL ANCHOR UNIT TYPE B-77

SHEET 5 OF 7
862D03

ENGLISH DETAIL DRAWING FOR
STRUCTURE ANCHOR UNIT
GUARDRAIL ANCHOR UNIT TYPE B-77
FOR F-SHAPE BARRIER

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

NORTH CAROLINA PROFESSIONAL SEAL 022966 ENGINEER JOSEPH HOWERTON
873F3D17DCDC45F...
4/16/2015

CONTRACT STANDARDS AND DEVELOPMENT UNIT
Office 919-707-6950 FAX 919-250-4119

SEE TITLE BLOCK

ORIGINAL BY: J HOWERTON DATE: 06-22-12
MODIFIED BY: _____ DATE: _____
CHECKED BY: _____ DATE: _____
FILE SPEC.: _____

$$$$$$SYSTIME$$$$$$
$$$$$$SYSNAME$$$$$$
$$$$$$USERNAME$$$$$$