

OVERLAP PROGRAMMING DETAIL

(program controller as shown below)

FROM MAIN MENU PRESS '8' (OVERLAPS), THEN
'1' (VEHICLE OVERLAP SETTINGS).

```

PAGE 1: VEHICLE OVERLAP 'A' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: |      X
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
-----
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'B' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: | X X X X
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
-----
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...N
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```

← NOTICE GREEN FLASH

PRESS '+'

```

PAGE 1: VEHICLE OVERLAP 'C' SETTINGS
PHASE:      |12345678910111213141516
VEH OVL PARENTS: | X
VEH OVL NOT VEH: |
VEH OVL NOT PED: |
VEH OVL GRN EXT: |
STARTUP COLOR:  | _ RED _ YELLOW _ GREEN
FLASH COLORS:   | _ RED _ YELLOW X GREEN
-----
SELECT VEHICLE OVERLAP OPTIONS: (Y/N)
FLASH YELLOW IN CONTROLLER FLASH?...Y
GREEN EXTENSION (0-255 SEC).....0
YELLOW CLEAR (0=PARENT,3-25.5 SEC)..0.0
RED CLEAR (0=PARENT,0.1-25.5 SEC)...0.0
OUTPUT AS PHASE # (0=NONE, 1-16)....0
    
```


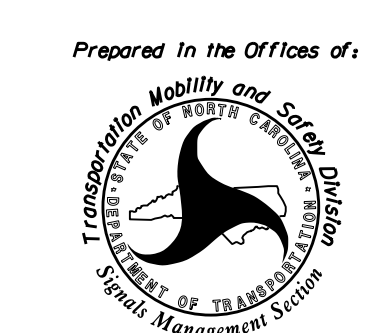
← NOTICE GREEN FLASH

OVERLAP PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 08-0287
DESIGNED: February 2015
SEALED: 2/19/2015
REVISED: N/A

20-SEP-2015 09:21
 C:\PITS\ASST\T\S\Sig\el\work\groups\Sig_Mon\Arms\stronp\080287_sm.ele.xxx.dgn
 sarmsstronp

Electrical Detail - Sheet 2 of 3

ELECTRICAL AND PROGRAMMING DETAILS FOR:	SR 1619 (Prospect Street) at I-85 Bus./US 29 NB-70 EB Ramp and SR 1663 (Auction Road)	SEAL 									
 Prepared in the Offices of: Transportation Mobility and Safety Institute 750 N. Greenfield Pkwy, Garner, NC 27529	Division 8 Randolph County ds High Point PLAN DATE: February 2015 REVIEWED BY: JTR PREPARED BY: S. Armstrong REVIEWED BY:	DocuSigned by: John T. Rowe, Jr. 2/23/2015 841080C145EE4F5 DATE									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 70%;">REVISIONS</th> <th style="width: 15%;">INIT.</th> <th style="width: 15%;">DATE</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>		REVISIONS	INIT.	DATE							SIG. INVENTORY NO. 08-0287
REVISIONS	INIT.	DATE									