


PHASING DIAGRAM



PHASING DIAGRAM DETECTION LEGEND


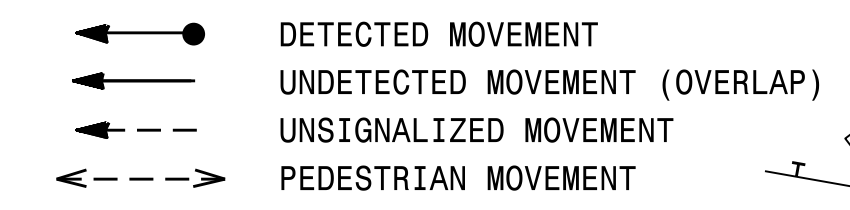


TABLE OF OPERATION

SIGNAL FACE	PHASE					
	01+5	01+6	02+5	02+6	03	04
11	←	←	←	←	←	←
21	R	R	G	G	R	Y
22	R	R	G	G	R	Y
31	R	R	R	R	G	R
32	R	R	R	R	G	R
41	R	R	R	R	G	R
42	R	R	R	R	G	R
51	←	←	←	←	←	←
61	R	G	R	G	R	Y
62	R	G	R	G	R	Y

SIGNAL FACE I.D.




OASIS 2070 LOOP & DETECTOR INSTALLATION CHART

LOOP	SIZE (FT)	DISTANCE FROM STOPBAR (FT)	TURNS	NEW LOOP	DETECTOR PROGRAMMING						
					PHASE	CALLING EXTENSION	FULL TIME DELAY	STRETCH TIME	DELAY TIME	SYSTEM LOOP	NEW CARD
1A	6X40	0	2-4-2	Y	1	Y	Y	-	-	-	-
2A	6X6	300	4	Y	2	Y	Y	-	-	-	-
2B	6X6	300	4	Y	2	Y	Y	-	-	-	-
3A	6X40	0	2-4-2	Y	3	Y	Y	-	-	3	-
3B	6X40	0	2-4-2	Y	3	Y	Y	-	-	10	-
4A	6X40	0	2-4-2	Y	4	Y	Y	-	-	3	-
4B	6X40	0	2-4-2	Y	4	Y	Y	-	-	10	-
5A	6X40	0	2-4-2	Y	5	Y	Y	-	-	-	-
6A	6X6	300	EXIST	-	6	Y	Y	-	-	-	-
6B	6X6	300	EXIST	-	6	Y	Y	-	-	-	-
S13	6X6	+300	4	Y	-	-	-	-	-	-	Y
S14	6X6	+300	4	Y	-	-	-	-	-	-	Y

6 Phase Fully Actuated Concord / Kannapolis CLS-Zone 2

NOTES


- Refer to "Roadway Standard Drawings NCDOT" dated January 2012 and "Standard Specifications for Roads and Structures" dated January 2012.
- Do not program signal for late night flashing operation unless otherwise directed by the Engineer.
- Phase 1 and/or phase 5 may be lagged.
- The order of phase 3 and phase 4 may be reversed.
- Set all detector units to presence mode.
- Maximum times shown in timing chart are for free-run operation only. Coordinated signal system timing values supersede these values.
- Closed loop system data: Controller Asset # 0417.



OASIS 2070 TIMING CHART

FEATURE	PHASE					
	1	2	3	4	5	6
Min Green 1 *	7	12	7	7	7	12
Extension 1	2.0	6.0	2.0	2.0	2.0	6.0
Max Green 1 *	15	90	15	30	15	90
Yellow Clearance	3.0	4.7	3.8	3.8	3.0	4.3
Red Clearance	2.6	1.3	2.5	2.5	2.9	1.5
Red Revert	2.0	2.0	2.0	2.0	2.0	2.0
Walk 1 *	-	-	-	-	-	-
Don't Walk 1	-	-	-	-	-	-
Seconds Per Actuation *	-	1.5	-	-	-	1.5
Max Variable Initial *	-	34	-	-	-	34
Time Before Reduction *	-	15	-	-	-	15
Time To Reduce *	-	45	-	-	-	45
Minimum Gap	-	3.0	-	-	-	3.0
Recall Mode	-	MIN RECALL	-	-	-	MIN RECALL
Vehicle Call Memory	-	YELLOW	-	-	-	YELLOW
Dual Entry	-	-	-	-	-	-
Simultaneous Gap	ON	ON	ON	ON	ON	ON

* These values may be field adjusted. Do not adjust Min Green and Extension times for phases 2 and 6 lower than what is shown. Min Green for all other phases should not be lower than 4 seconds.

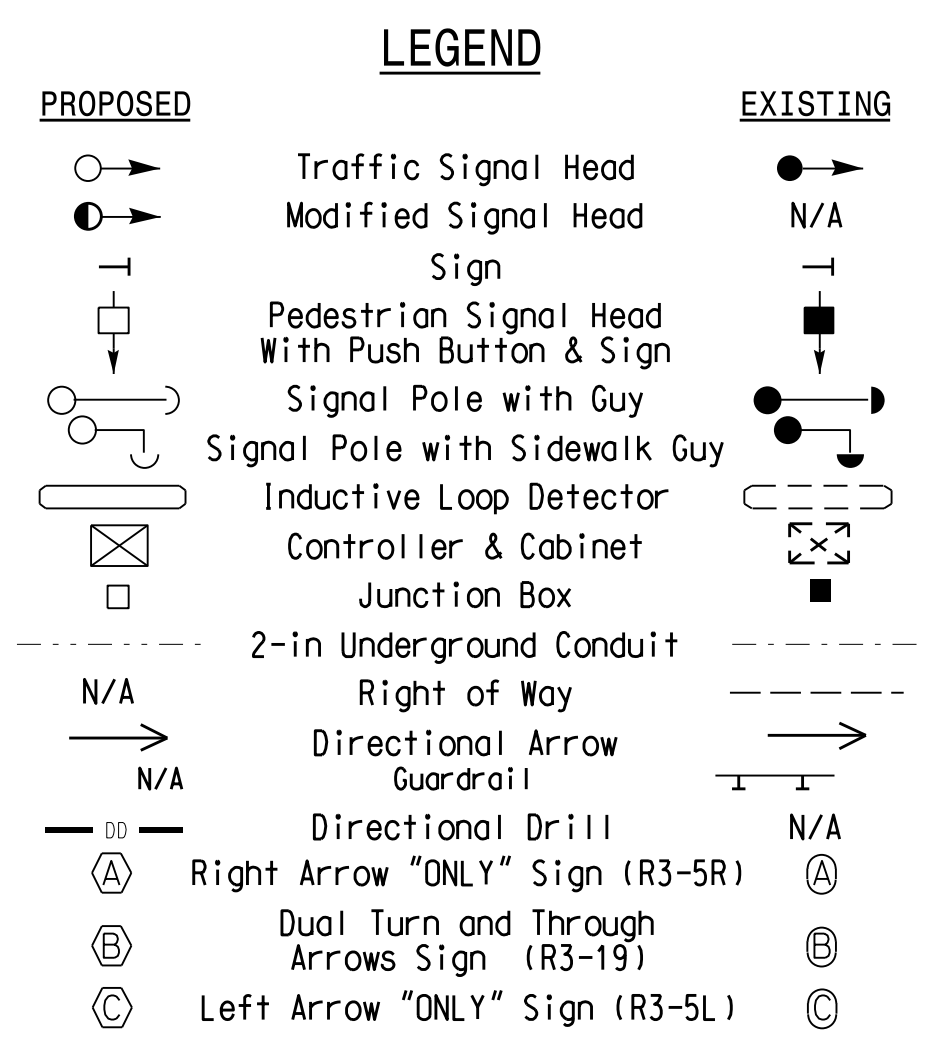

Signal Upgrade Final Design

750 N. Greenfield Pkwy, Garner, NC 27529

**US 29-601 / NC 73
(Concord Parkway North) at
NC 73 (Davidson Drive) /
Davidson Drive**

Division 10 Cabarrus County Concord

PLAN DATE: November 2014 REVIEWED BY: T. Williams

PREPARED BY: M. Mahbooba REVIEWED BY:

SEAL

12/15/2014

SIG. INVENTORY NO. 10-0417

SCALE 0 40
1"=40'

15-066-2014_11-13
 R:\Projects\2014\11-13\Signal\Signal Design\Signal Design Section
 mmb0000