

PLANT SCHEDULE L9

SHRUBS	QTY	BOTANICAL NAME	COMMON NAME	SIZE	WIDTH	HEIGHT	SPACING	REMARKS
CA	29	Clethra alnifolia 'Sixteen Candles'	Summersweet Clethra	Cont.	24"	24"	36" o.c.	
SOD/SEED	QTY	BOTANICAL NAME	COMMON NAME	CONT	WIDTH	HEIGHT	SPACING	REMARKS
ET	6,860 sf	Eremochloa ophiuroides 'Tif Blair' TM	Centipede Grass	Seed				
MULCH	300 SF	Double Shredded Hardwood						

PLAN LEGEND	
	NEIGHBORHOOD MARKER DETAIL SHEET LD 2
	PEDESTRIAN POST TOP LIGHT
	STREET LIGHT
	SODDED LAWN ALL OTHER DISTURBED AREAS TO BE SEEDED AS PART OF ROADWAY WORK
	SEEDED LAWN

LANDSCAPE NOTES:

1. ALL PLANT MATERIAL SHALL COMPLY WITH 'AMERICAN STANDARDS FOR NURSERY STOCK' (ANSI Z60.1).
2. ANY PLANT SUBSTITUTIONS OR FIELD ADJUSTMENTS SHALL BE APPROVED BY THE CITY OF GREENVILLE OR OWNER'S REPRESENTATIVE.
3. ALL PLANTED BEDS TO BE AMENDED WITH THE SPECIFIED AMOUNT OF COMPOST AND TOPSOIL PER PROJECT SPECIAL PROVISIONS.
4. ANY TREES NOT INCORPORATED INTO PLANT BEDS SHALL HAVE A 4' DIAMETER MULCH RING.
5. ALL SINGLE STEM TREES SHALL BE LIMBED UP MINIMUM 6' FOR SITE DISTANCE.
6. ALL PLANT BEDS TO HAVE MULCH LAYER PER DETAILS.
7. ALL SODDED AND SEEDED AREAS TO BE IMPROVED VARIETY CENTIPEDE PER SPECIAL PROVISIONS.

GENERAL NOTES:

1. DESIGN SPEED : 45MPH

Kimley»Horn

Kimley-Horn
and Associates, Inc.



P.O. BOX 33068
RALEIGH, N.C. 27636

RIGHT-OF-WAY REV.
CONST. REV.

PROJECT REFERENCE NO.	SHEET NO.
U-3315	L 9
R/W SHEET NO.	
DocuSigned by: <i>Brandon P. White</i> 9931B1C7B2D44DE... 5/8/2015	



REVISIONS

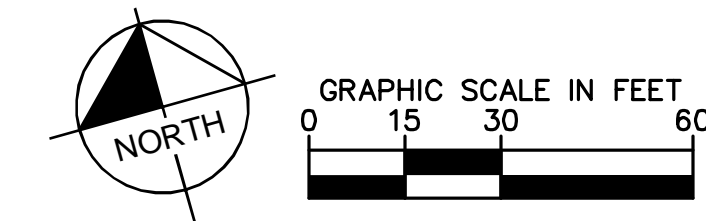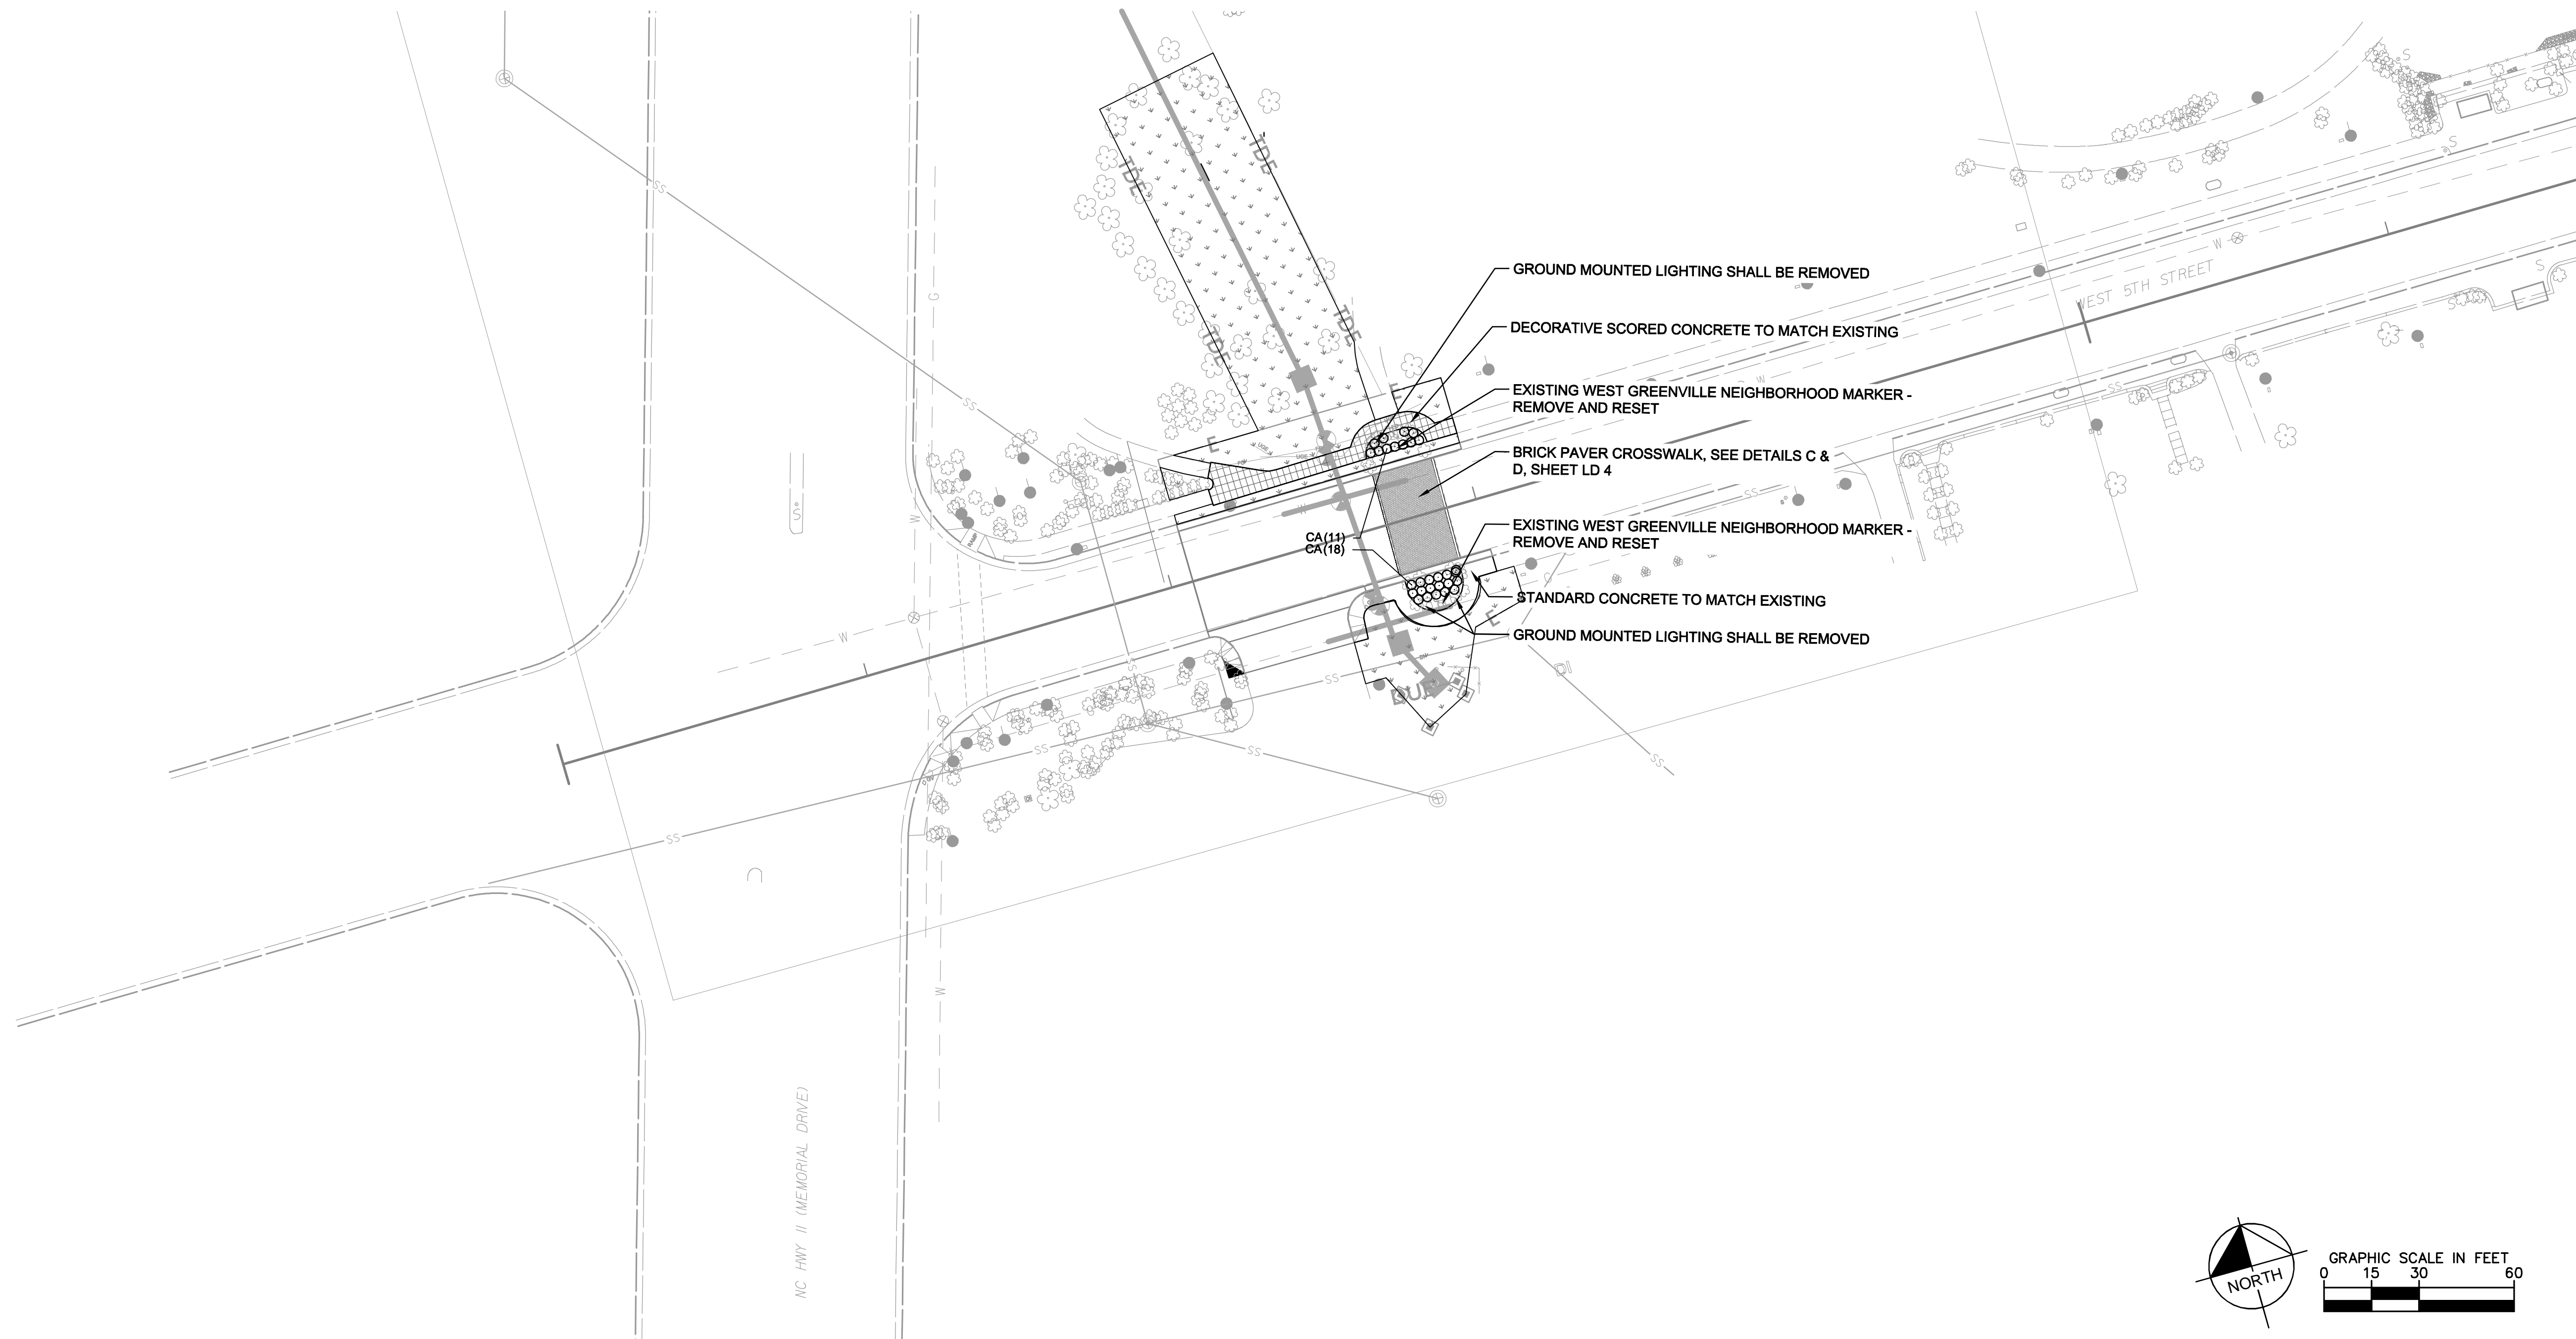

05-08-2015