

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**


**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN
GUILFORD COUNTY**

LOCATION: BRIDGE NO 193 OVER BUFFALO CREEK ON SR 2719 (HIGH ROCK RD)

PROJECT REFERENCE NO. B-4959	SHEET NO. SIGN-1
APPROVED:  066607A8577C4DC	
DATE: 7/1/2015	
SEAL 	

T.I.P.: B-4959

CONTRACT: C203625

GENERAL NOTES

- SIGNS FURNISHED BY STATE
- ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	91	L.F.
4096000000	904	SIGN ERECTION, TYPE D	2	EA.
4102000000	904	SIGN ERECTION, TYPE E	2	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	11	EA.

ROADWAY STANDARD DRAWING


THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

RENEE B. ROACH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER

STACEY W. JOHNS SIGNING & DELINEATION PROJECT DESIGN ENGINEER



SIGN NUMBER: 301,302	BACKG COLOR: Green	DESIGN BY: S.JOHNS	CHECKED BY: R.Roach	DATE: Feb 09, 2015
TYPE: D	COPY COLOR: White	PROJECT ID: B-4959	DIV: 7	
QUANTITY: 2				
SIGN WIDTH: 3'-0"				
HEIGHT: 2'-0"				
TOTAL AREA: 6.0 Sq.Ft.				
BORDER TYPE: FLUSH				
RECESS: 0"				
WIDTH: 1"				
RADII: 3"				
NO. Z BARS:				
LENGTH:				

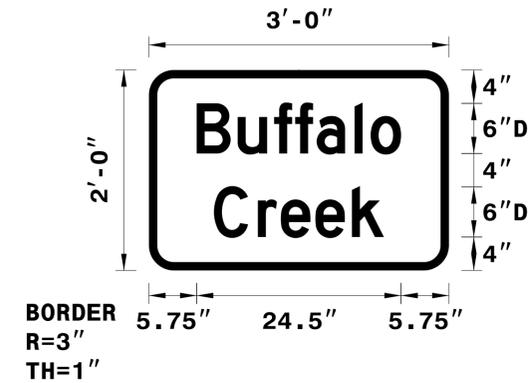

BORDER R=3" TH=1"

Spacing Factor is 1 unless specified otherwise

LETTER POSITIONS

Letter spacings are to start of next letter

	B	u	f	f	a	l	o															Series/Size Text Length	
	5.7	4.9	4.4	2.5	2.6	4.6	1.9	3.7	5.7													D 2000 24.5	
																							D 2000 20.4

FILENAME: SignDesigns NORTH CAROLINA D.O.T. SIGN DETAIL


"E" SIGNS


401 QUANTITY REQ'D <u>1</u>  36 X 36 R1-1 ONE "U" POST PER SIGN	402 QUANTITY REQ'D <u>1</u>  30 X 30 W1-3 ONE "U" POST PER SIGN	403 QUANTITY REQ'D <u>1</u>  18 X 18 W13-1P MOUNT BELOW SIGN 402 IN 1 INSTALLATIONS
---	---	---

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET, SIGN DESIGN, E-SIGN, & NOTES,
SIGN-2	SIGN DETAIL SHEET

6/30/2015 P:\TIP\Projects-B\B4959\Traffic\Signing\CADD\Signing Layout Plans\B4959Signing.dgn Users:johns

PROJECT REFERENCE NO. <i>B-4959</i>	SHEET NO. <i>SIGN-2</i>
APPROVED:  <small>DocuSigned by: Ronald W. King 066507A9677CADC...</small>	
DATE: <i>7/1/2015</i>	
SEAL 	

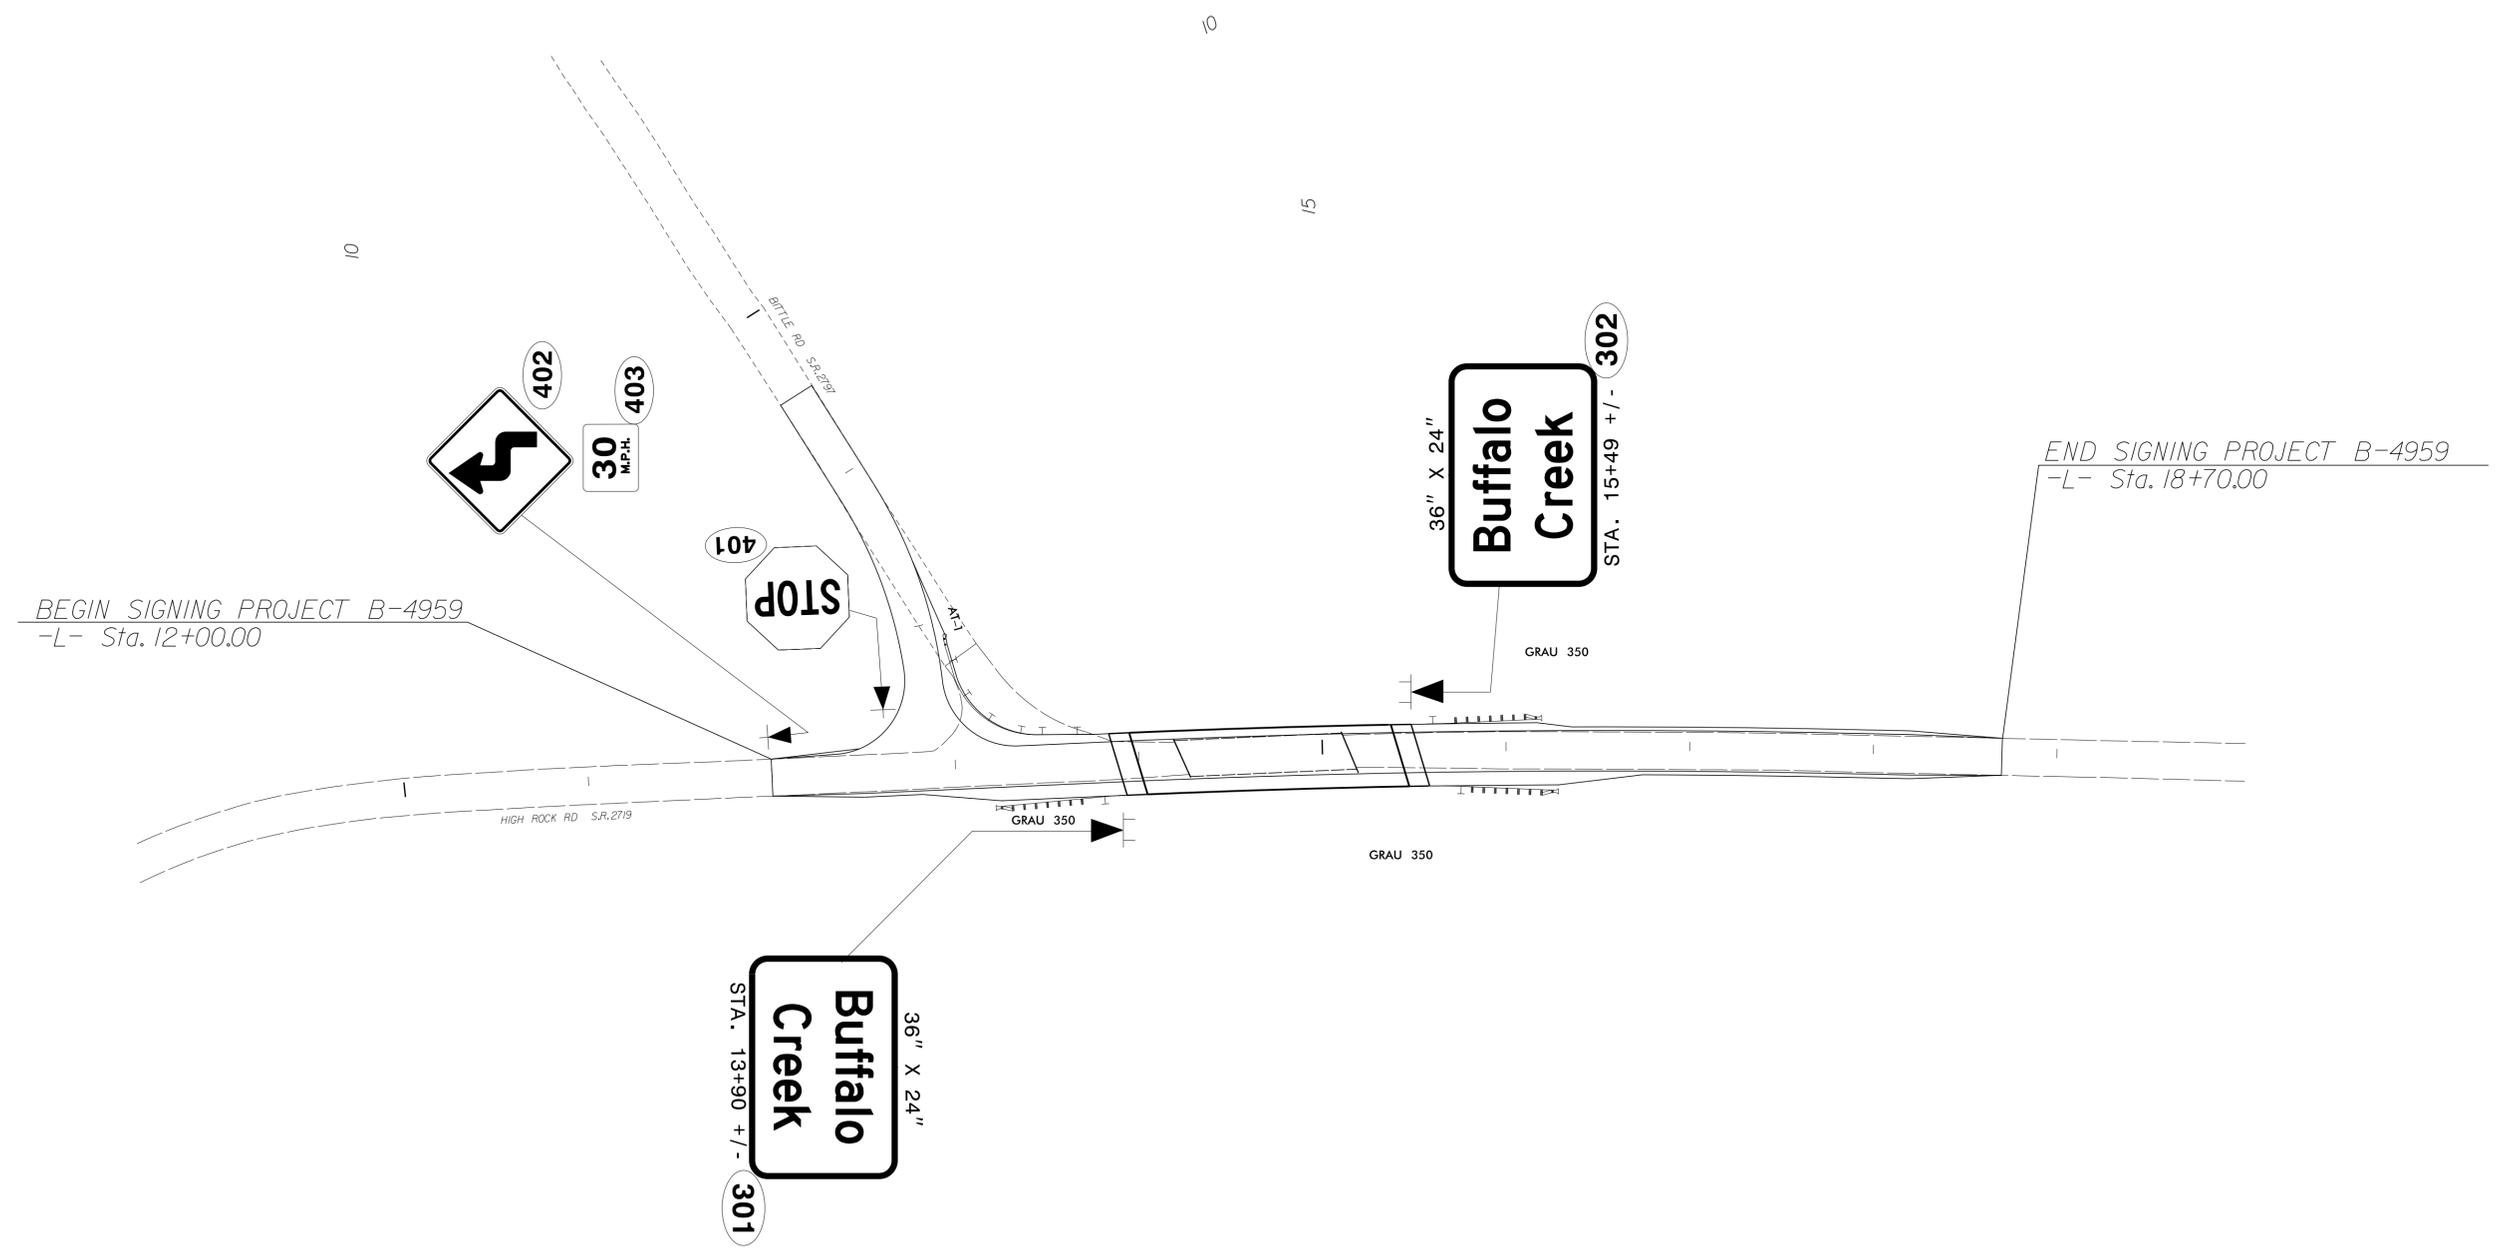

6/30/2015 P:\TIP\Projects-B\B4959-Traffic\Signing\CADD\Signing Layout Plans\B4959Signing.dgn

SIGN DETAIL SHEET