

PROJECT NOTES

GENERAL NOTES

CHANGES MAY BE REQUIRED WHEN PHYSICAL DIMENSIONS IN THE DETAIL DRAWINGS, STANDARD DETAILS AND ROADWAY DETAILS ARE NOT ATTAINABLE TO MEET FIELD CONDITIONS, OR RESULT IN DUPLICATE, OR UNDESIRED OVERLAPPING OF DEVICES. MODIFICATION MAY INCLUDE: MOVING, SUPPLEMENTING, COVERING OR REMOVAL OF DEVICES, AS DIRECTED BY THE ENGINEER.

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLANS, OR DIRECTED BY THE ENGINEER.

TIME RESTRICTIONS

A) DO NOT CLOSE OR NARROW TRAVEL LANES AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS
US 311 / I-74 BUSINESS 85 / US 29/70 I-85 RAMPS, LOOPS	6:00 AM TO 8:00 PM MONDAY THRU FRIDAY, 8:00 AM TO 8:00 PM SATURDAY, 10:00 AM TO 8:00 PM SUNDAY

DO NOT CLOSE OR NARROW TRAVEL LANES DURING HOLIDAYS AND SPECIAL EVENTS AS FOLLOWS:

ROAD NAME
US 311 / I-74 BUSINESS 85 / US 29/70 I-85 RAMPS, LOOPS

HOLIDAY

- FOR ANY UNEXPECTED OCCURRENCE THAT CREATES UNUSUALLY HIGH TRAFFIC VOLUMES, AS DIRECTED BY THE ENGINEER.
- FOR NEW YEAR'S, BETWEEN THE HOURS OF 6:00 AM DECEMBER 31ST TO 8:00 PM JANUARY 2ND. IF NEW YEAR'S DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY, THEN UNTIL 8:00 PM THE FOLLOWING TUESDAY.
- FOR EASTER, BETWEEN THE HOURS OF 6:00 AM THURSDAY AND 8:00 PM MONDAY.
- FOR MEMORIAL DAY, BETWEEN THE HOURS OF 6:00 AM FRIDAY TO 8:00 PM TUESDAY.
- FOR INDEPENDENCE DAY, BETWEEN THE HOURS OF 6:00 AM THE DAY BEFORE INDEPENDENCE DAY AND 8:00 PM THE DAY AFTER INDEPENDENCE DAY.

IF INDEPENDENCE DAY IS ON A FRIDAY, SATURDAY, SUNDAY OR MONDAY THEN BETWEEN THE HOURS OF 6:00 AM THE THURSDAY BEFORE INDEPENDENCE DAY AND 8:00 PM THE TUESDAY AFTER INDEPENDENCE DAY.

- FOR LABOR DAY, BETWEEN THE HOURS OF 6:00 AM FRIDAY AND 8:00 PM TUESDAY.
- FOR THANKSGIVING DAY, BETWEEN THE HOURS OF 6:00 AM TUESDAY AND 8:00 PM MONDAY.
- FOR CHRISTMAS, BETWEEN THE HOURS OF 6:00 AM THE FRIDAY BEFORE THE WEEK OF CHRISTMAS DAY AND 8:00 PM THE FOLLOWING TUESDAY AFTER THE WEEK OF CHRISTMAS DAY.

SPECIAL EVENTS

- FOR THE ACC AND NCAA BASKETBALL TOURNAMENTS, OCCURRING AT GREENSBORO COLISEUM AND COMPLEX BETWEEN THE HOURS OF 6:00 A.M. THE DAY BEFORE THE START OF THE TOURNAMENT AND 8:00 P.M. THE DAY AFTER THE END OF THE TOURNAMENT.

B) DO NOT CLOSE OR NARROW TRAVEL LANES AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS
ANY ROAD OTHER THAN US 311 / I-74, BUSINESS 85 / US 29/70, AND I-85.	6:00 AM TO 9:00 AM AND 4:00 PM TO 7:00 PM MONDAY THRU FRIDAY

DO NOT CLOSE OR NARROW TRAVEL LANES DURING HOLIDAYS AND SPECIAL EVENTS AS FOLLOWS:

ROAD NAME
ANY ROAD OTHER THAN US 311 / I-74, BUSINESS 85 / US 29/70, AND I-85.

HOLIDAY

- FOR ANY UNEXPECTED OCCURRENCE THAT CREATES UNUSUALLY HIGH TRAFFIC VOLUMES, AS DIRECTED BY THE ENGINEER.
- FOR NEW YEAR'S, BETWEEN THE HOURS OF 6:00 AM DECEMBER 31ST TO 8:00 PM JANUARY 2ND. IF NEW YEAR'S DAY IS ON A FRIDAY, SATURDAY, SUNDAY, OR MONDAY, THEN UNTIL 8:00 PM THE FOLLOWING TUESDAY.
- FOR EASTER, BETWEEN THE HOURS OF 6:00 AM THURSDAY AND 8:00 PM MONDAY.
- FOR MEMORIAL DAY, BETWEEN THE HOURS OF 6:00 AM FRIDAY TO 8:00 PM TUESDAY.
- FOR INDEPENDENCE DAY, BETWEEN THE HOURS OF 6:00 AM THE DAY BEFORE INDEPENDENCE DAY AND 8:00 PM THE DAY AFTER INDEPENDENCE DAY.

IF INDEPENDENCE DAY IS ON A FRIDAY, SATURDAY, SUNDAY OR MONDAY THEN BETWEEN THE HOURS OF 6:00 AM THE THURSDAY BEFORE INDEPENDENCE DAY AND 8:00 PM THE TUESDAY AFTER INDEPENDENCE DAY.
- FOR LABOR DAY, BETWEEN THE HOURS OF 6:00 AM FRIDAY AND 8:00 PM TUESDAY.
- FOR THANKSGIVING DAY, BETWEEN THE HOURS OF 6:00 AM TUESDAY AND 8:00 PM MONDAY.
- FOR CHRISTMAS, BETWEEN THE HOURS OF 6:00 AM THE FRIDAY BEFORE THE WEEK OF CHRISTMAS DAY AND 8:00 PM THE FOLLOWING TUESDAY AFTER THE WEEK OF CHRISTMAS DAY.

SPECIAL EVENTS

- FOR HIGH POINT UNIVERSITY BASEBALL GAMES AT WILLARD STADIUM BETWEEN FOUR (4) HOURS BEFORE THE START OF A GAME AND FOUR (4) HOURS AFTER THE END OF A GAME. (THIS NOTE ONLY APPLIES TO E. LEXINGTON AVENUE, N. COLLEGE DRIVE, N. CENTENNIAL STREET AND MONTLIEU AVENUE).
- FOR HIGH POINT UNIVERSITY SOCCER AND LACROSSE GAMES, OCCURRING AT VERT STADIUM BETWEEN FOUR (4) HOURS BEFORE THE START AND FOUR (4) HOURS AFTER THE END OF THE HIGH POINT UNIVERSITY SOCCER AND LACROSSE GAMES. (THIS NOTE ONLY APPLIES TO E. LEXINGTON AVENUE, N. COLLEGE DRIVE, N. CENTENNIAL STREET AND MONTLIEU AVENUE).
- FOR HIGH POINT UNIVERSITY BASKETBALL GAMES, OCCURRING AT MILLS CENTER BETWEEN TWO (2) HOURS BEFORE THE START AND TWO (2) HOURS AFTER THE END OF THE HIGH POINT UNIVERSITY BASKETBALL GAMES. (THIS NOTE ONLY APPLIES TO E. LEXINGTON AVENUE, N. COLLEGE DRIVE, N. CENTENNIAL STREET AND MONTLIEU AVENUE).
- FOR WEEKENDS DURING THE HOLIDAY SHOPPING PERIOD AT OAK HOLLOW MALL BETWEEN THE WEEKEND OF THANKSGIVING AND THE WEEKEND OF CHRISTMAS, BETWEEN THE HOURS OF 9:00 AM AND 9:00 PM ON BOTH SATURDAY AND SUNDAY. (THIS NOTE ONLY APPLIES TO E. HARTLEY DRIVE AND EASTCHESTER DRIVE).

C) DO NOT CLOSE OR NARROW TRAVEL LANES OR CLOSE SIDEWALKS OR PEDESTRIAN CROSSINGS WITHIN THE HIGH POINT UNIVERSITY (HPU) MAIN CAMPUS AREA. SUBMIT TO THE CITY FOR REVIEW AND APPROVAL TWO WEEKS IN ADVANCE A SCHEDULE FOR PROPOSED WORK THAT WILL REQUIRE NARROWING OR CLOSING A LANE, ROAD, SIDEWALK OR PEDESTRIAN CROSSING. THE HPU MAIN CAMPUS AREA IS DEFINED AS THE AREA BOUNDED BY E. LEXINGTON AVENUE, N. COLLEGE DRIVE, N. CENTENNIAL STREET AND MONTLIEU AVENUE.

D) DO NOT CLOSE OR NARROW TRAVEL LANES OR CLOSE SIDEWALKS OR PEDESTRIAN CROSSINGS WITHIN 1/2 MILE OF A SCHOOL DURING ARRIVAL AND DISMISSAL HOURS ON A SCHOOL DAY. COORDINATE WITH THE AFFECTED SCHOOL CONCERNING OPERATIONAL HOURS AND SCHOOL DAYS. AS A MINIMUM, DO NOT CLOSE OR NARROW A LANE OR CLOSE A SIDEWALK OR PEDESTRIAN CROSSING DURING HOURS POSTED ON SCHOOL SPEED ZONE SIGNS (WHEN PRESENT).

E) DO NOT STOP TRAFFIC AS FOLLOWS:

ROAD NAME	DAY AND TIME RESTRICTIONS	DURATION AND OPERATION
ALL ROADS	MON. - SUN. 6:00 AM TO 9:00 PM	20 MINUTES INSTALLING CABLE ACROSS ROAD (USING RSD. 1101.03, SHEETS 8 & 9 OF 9)

LANE AND SHOULDER CLOSURE REQUIREMENTS

F) ON STREETS WHERE POSTED SPEED LIMIT IS 40 MPH OR LESS AND WORK IS ON THE SHOULDER, CLOSE THE SHOULDER USING RSD 1101.04 OR USE A SHOULDER CLOSURE WITH MINOR ENCROACHMENT INTO THE ADJACENT TRAFFIC LANE AS SHOWN IN M.U.T.C.D. FIGURE 6H-6, "SHOULDER WORK WITH MINOR ENCROACHMENT (TA-6)." WHEN USING TA-6, COMPLY WITH THE APPLICATION NOTES ON MUTCD PAGE 6H-16, AND MAINTAIN A MINIMUM OF 10-FT TRAVEL LANE. CLOSE AFFECTED SIDEWALKS AND PEDESTRIAN PATHS. WHERE A 10FT. OR GREATER TRAVEL LANE CANNOT BE MAINTAINED OR AS DIRECTED BY THE ENGINEER, CLOSE THE ADJACENT TRAFFIC LANE USING RSD 1101.02, SHEETS 1 THRU 4 OF 15.

G) REMOVE LANE CLOSURE DEVICES FROM THE LANE WHEN WORK IS NOT BEING PERFORMED BEHIND THE LANE CLOSURE OR WHEN A LANE CLOSURE IS NO LONGER NEEDED, OR AS DIRECTED BY THE ENGINEER.

H) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING GREATER THAN 5 FT BUT LESS THAN 15 FT FROM AN OPEN TRAVEL LANE ON A ROADWAY WITH A POSTED SPEED LIMIT OF 45 MPH OR GREATER, CLOSE THE ADJACENT SHOULDER USING ROADWAY STANDARD DRAWING NO. 1101.04 UNLESS THE WORK AREA IS PROTECTED BY BARRIER OR GUARDRAIL OR A LANE CLOSURE IS INSTALLED.



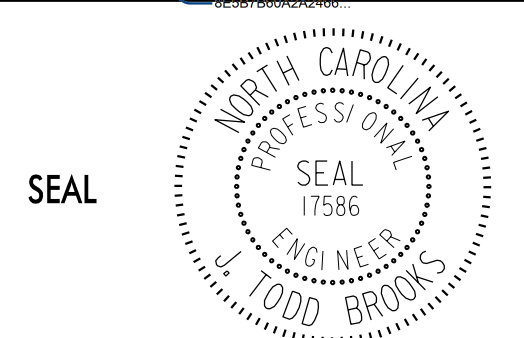
I) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING WITHIN 5 FT OF AN OPEN TRAVEL LANE ON A ROADWAY WITH A POSTED SPEED LIMIT OF 45 MPH OR GREATER, CLOSE THE NEAREST OPEN TRAVEL LANE USING ROADWAY STANDARD DRAWING NO. 1101.02 UNLESS THE WORK AREA IS PROTECTED BY BARRIER OR GUARDRAIL.

J) WHEN PERSONNEL AND/OR EQUIPMENT ARE WORKING WITHIN A LANE OF TRAVEL OF AN UNDIVIDED OR DIVIDED FACILITY, CLOSE THE LANE ACCORDING TO THE ROADWAY STANDARD DRAWINGS OR AS DIRECTED BY THE ENGINEER. CONDUCT THE WORK SO THAT ALL PERSONNEL AND/OR EQUIPMENT REMAIN WITHIN THE CLOSED TRAVEL LANE.

K) DO NOT INSTALL MORE THAN ONE LANE CLOSURE IN ANY ONE DIRECTION ON ANY ROADWAY.

(CONTINUED ON TMP-7.03)

ATKINS 1616 EAST MILLBROOK ROAD, SUITE 310
RALEIGH, NORTH CAROLINA 27609
(919) 876-6888 NCBEES #F-0326

APPROVED:  DATE: 8/14/2015		<p style="text-align: center;">PROJECT NOTES (SHEET 1 OF 2)</p>
		

14-AUG-2015 13:43
 C:\Users\jbrooks\Documents\Projects\High Point Stg Sys\TMP\C-5558-TMP-01.dgn
 AT-DUS29040