


CL-10

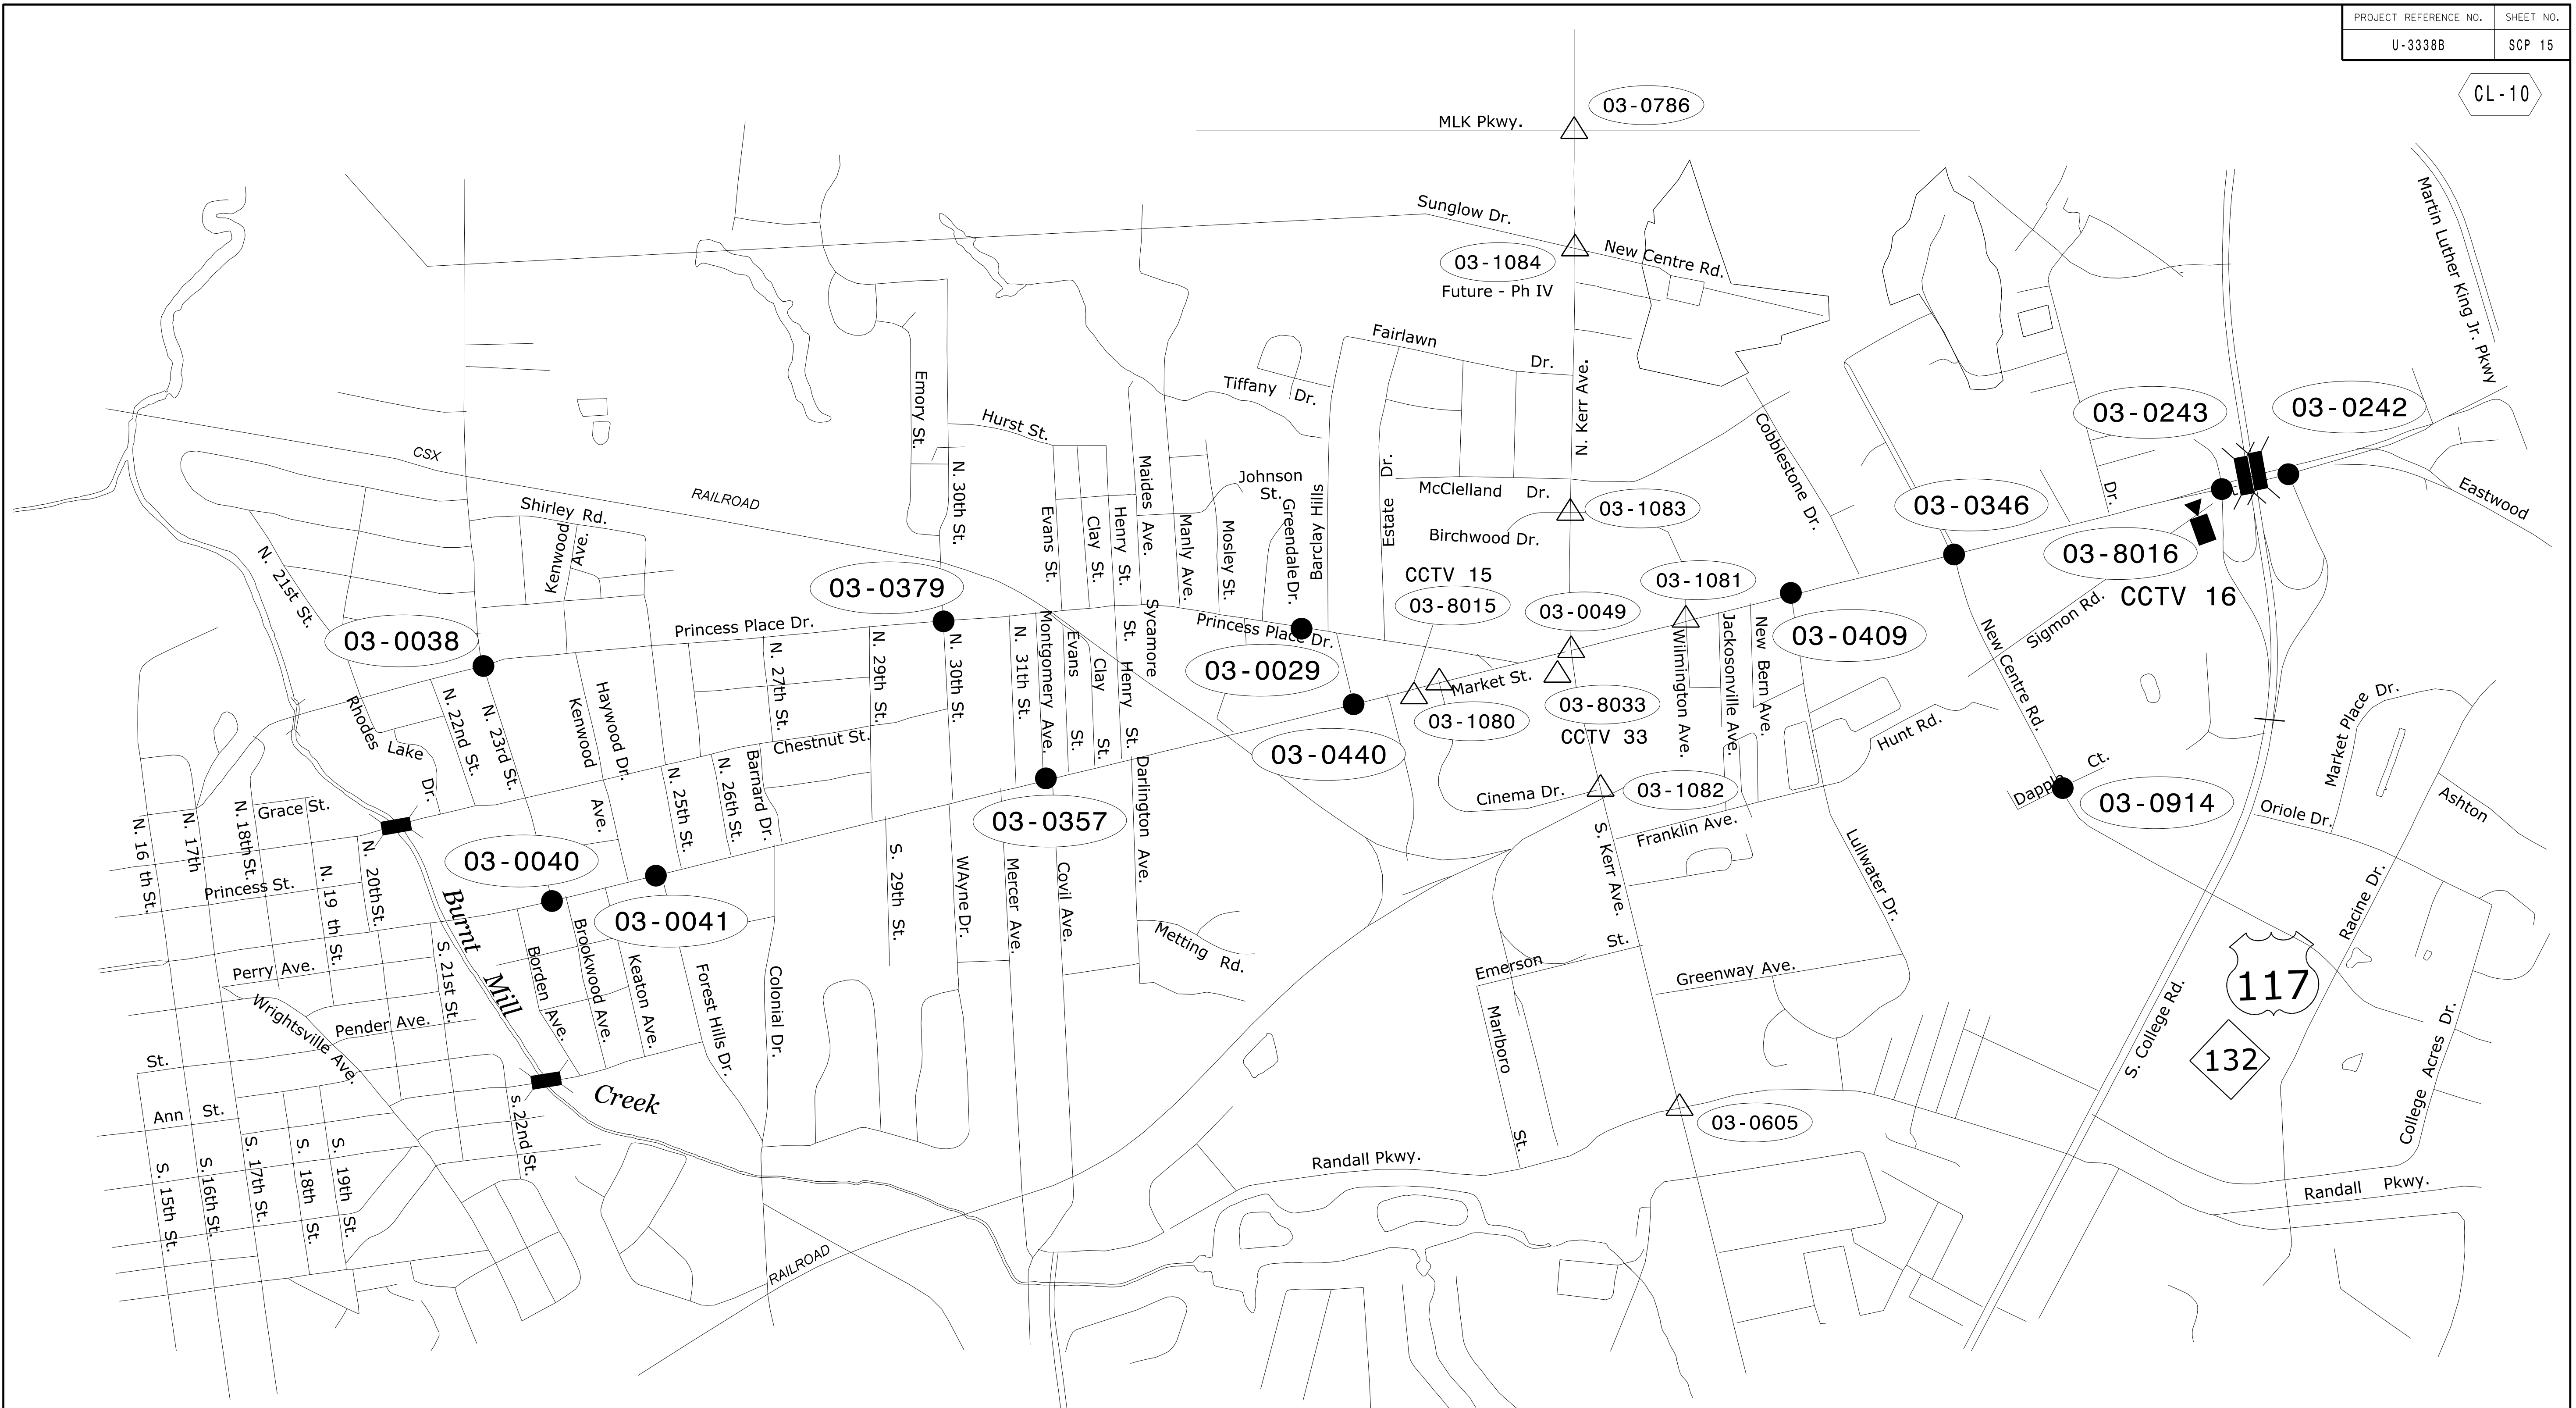

- NOTES:
- IN COORDINATION WITH TRAFFIC SHIFT DURING TMP PHASE II, STEP 2, COMPLETE THE FOLLOWING WORK TO MIGRATE LOCATIONS SHOWN TO PROPOSED ETHERNET CHANNELS.
    - FOR SIGNALS AS SHOWN ABOVE WITH SOLID CIRCLE (●):
      - REPLACE TRANSCEIVER WITH FIELD ETHERNET SWITCH
      - REPLACE 2070-1B CPU MODULE WITH 2070-1E CPU MODULE
      - REPLACE EXISTING CONFLICT MONITORS
      - INSTALL SMFO JUMPERS
    - FOR CCTVS AS SHOWN ABOVE WITH SOLID CAMERA SYMBOL (■◀):
      - REPLACE TRANSCEIVER WITH FIELD ETHERNET SWITCH
      - REPLACE CCTV CAMERA WITH NEW CCTV CAMERA
      - MODIFY ADJACENT SPLICE AS SHOWN IN SPLICE PLANS
      - MODIFY INTERCONNECT CENTER AS SHOWN IN PLANS
      - INSTALL SMFO JUMPERS
  - SEE SHEETS CL-1 THRU CL-09 FOR DETAILS OF ITS WORK ON SIGNALS AND CCTV SHOWN WITH HOLLOW TRIANGLE (△)

WORK UNDER ICT

**ATKINS** 1616 EAST MILLBROOK ROAD, SUITE 310 RALEIGH, NORTH CAROLINA 27609 (919) 876-6888 NCBEEES #F-0326

	<b>System Conversion To Ethernet</b> <b>TMP Phase II, Step 2</b>		
	Division 03 New Hanover County Wilmington	PLAN DATE: November 2014 REVIEWED BY: JT Brooks	
PREPARED BY: LM Moon	REVIEWED BY: MB Toth	REVISIONS INIT. DATE	
750 Greenfield Parkway, Garner, NC 27529		Declassified by: Melissa B. Toth 7/15/2015	

15-JUL-2015 08:45 D:\projects\atkins\proj\00036295\_U33388\_Kerr\_Sig\_ITS\CR\U33388\_CL\_10.dgn AT DUS290140 WILE2054