
STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

PLAN FOR PROPOSED HIGHWAY EROSION CONTROL

TRANSYLVANIA COUNTY

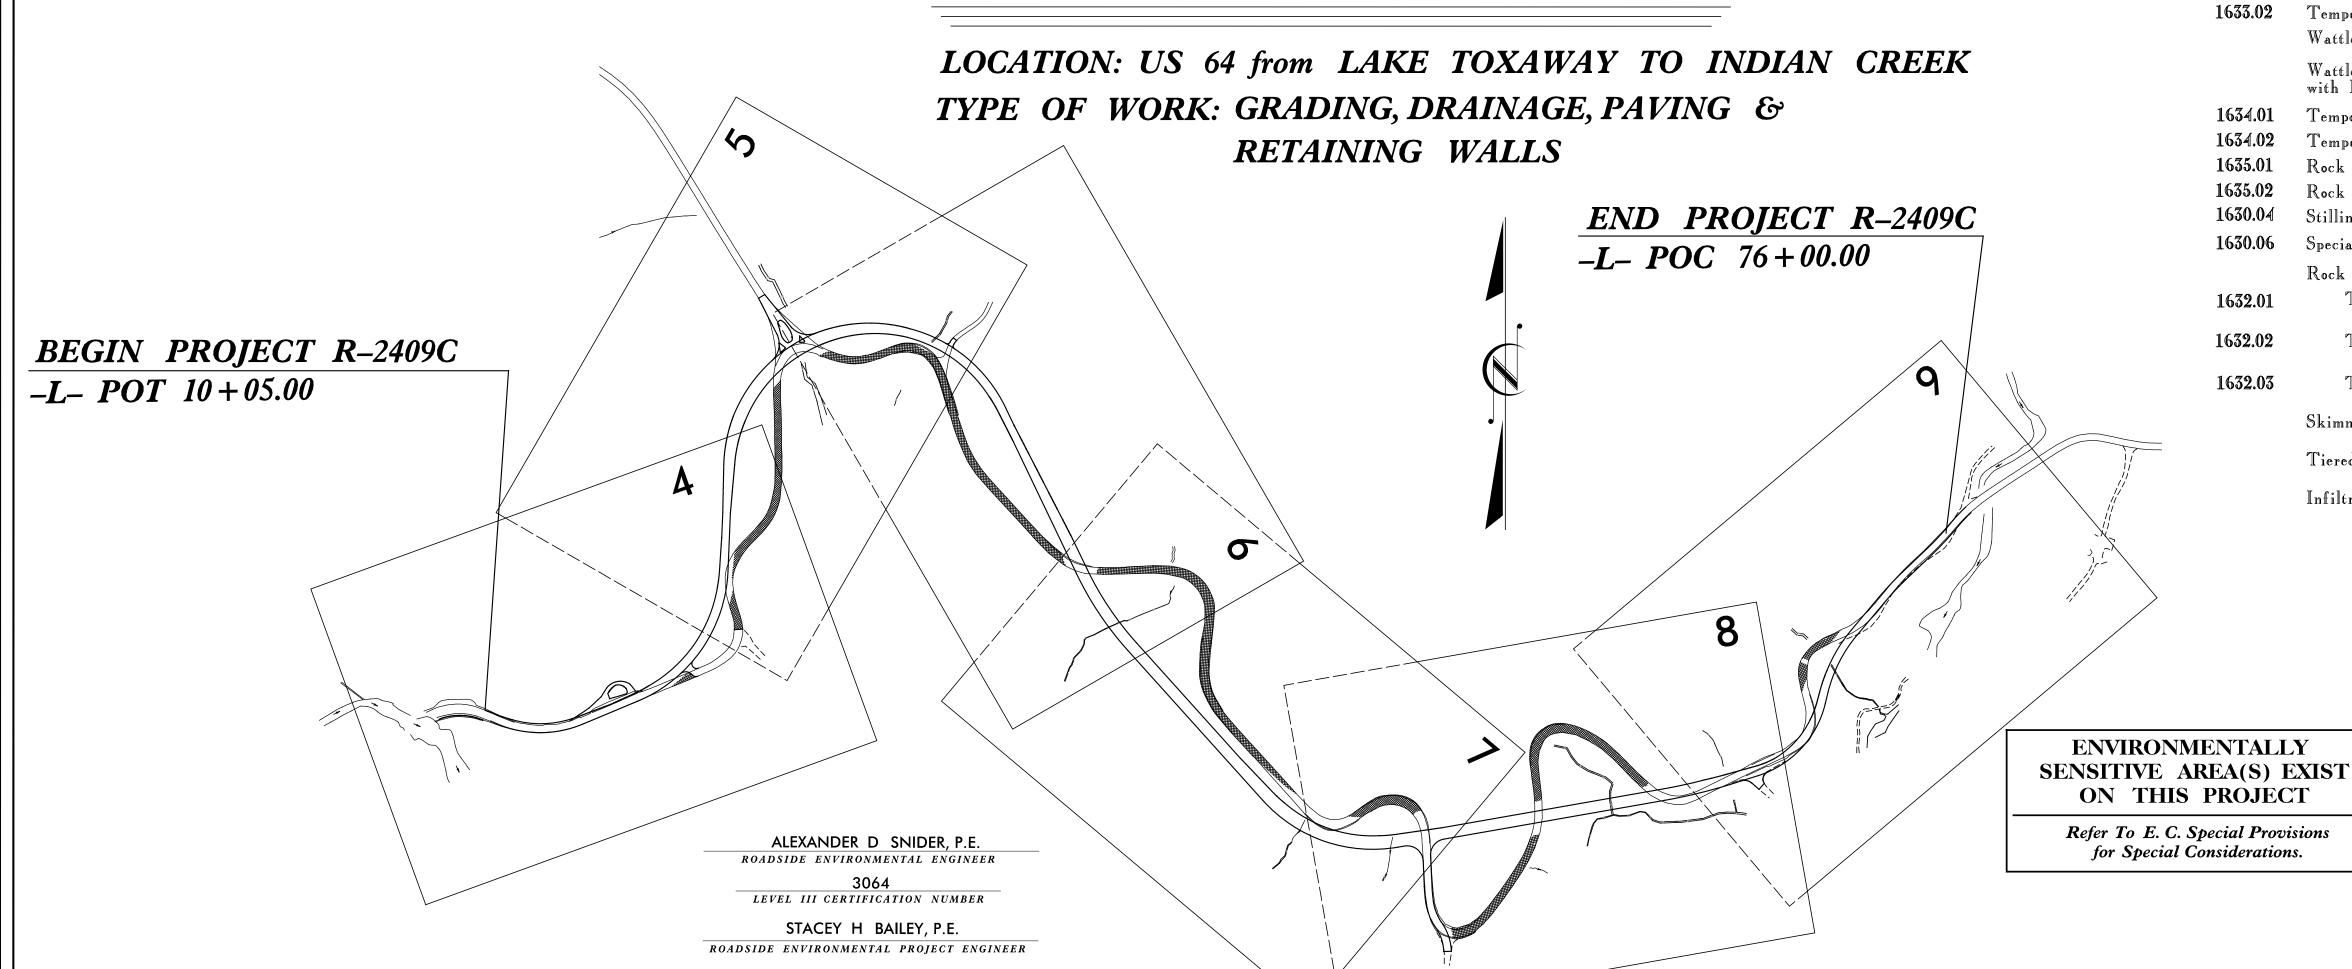

STATE PROJECT REFERENCE NO R=2409C

EROSION AND SEDIMENT CONTROL MEASURES Temporary Silt Fence Special Sediment Control Fence Temporary Berms and Slope Drains Silt Basin Type B. Temporary Rock Silt Check Type-A. Temporary Rock Silt Check Type-A with Matting and Polyacrylamide (PAM) 1633.02 Temporary Rock Silt Check Type-B. Wattle / Coir Fiber Wattle Wattle / Coir Fiber Wattle with Polyacrylamide (PAM). Temporary Rock Sediment Dam Type-A. Temporary Rock Sediment Dam Type-B....

Rock Pipe Inlet Sediment Trap Type-A.... Rock Pipe Inlet Sediment Trap Type-B. Stilling Basin Special Stilling Basin Rock Inlet Sediment Trap: Туре А 1632.01 1632.02 Туре В. 1632.03 Type C. Skimmer Basin Tiered Skimmer Basin Infiltration Basin

> THIS PROJECT CONTAINS EROSION CONTROL PLANS FOR CLEARING AND GRUBBING PHASE OF CONSTRUCTION.

THIS PROJECT HAS BEEN DESIGNED TO SENSITIVE WATERSHED STANDARDS.



GRAPHIC SCALE **PLANS** PROFILE (HORIZONTAL) PROFILE (VERTICAL)

ROADSIDE ENVIRONMENTAL UNIT **DIVISION OF HIGHWAYS** STATE OF NORTH CAROLINA

> LEVEL III CERTIFIED BY: STACEY H. BAILEY, PE **CERTIFICATION NUMBER: 3074** ISSUED: JUNE 25, 2014

THESE EROSION AND SEDIMENT CONTROL PLANS COMPLY WITH THE REGULATIONS SET FORTH BY THE NCG-010000 GENERAL CONSTRUCTION PERMIT EFFECTIVE AUGUST 3, 2011 ISSUED BY THE NORTH CAROLINA DEPARTMENT OF ENVIRONMENT AND NATURAL RESOURCES DIVISION OF WATER QUALITY.

LEVEL III CERTIFICATION NUMBER

Prepared in the Office of:

ICA ENGINEERING

5121 KINGDOM WAY SUITE 100 RALEIGH, NC 27607 919-851-6066 NC LIC. NO. F-0258

2012 STANDARD SPECIFICATIONS

Roadway Standard Drawings

The following roadway english standards as appear in "Roadway Standard Drawings"- Roadway Design Unit - N. C. Department of Transportation - Raleigh, N. C., dated January 2012 and the latest revison thereto are applicable to this project and by reference hereby are considered a part of

1604.01	Railroad Erosion Control Deta
1605.01	Temporary Silt Fence
1606.01	Special Sediment Control Fence
1607.01	Gravel Construction Entrance
1/22 01	T D 1 C1 T

1630.01 Riser Basin

1630.02 Silt Basin Type B 1630.03 Temporary Silt Ditch 1630.04 Stilling Basin 1630.05 Temporary Diversion 1630.06 Special Stilling Basin

1631.01 Matting Installation

1632.01 Rock Inlet Sediment Trap Type A 1632.02 Rock Inlet Sediment Trap Type B 1632.03 Rock Inlet Sediment Trap Type C 1633.01 Temporary Rock Silt Check Type A 1633.02 Temporary Rock Silt Check Type B 1634.01 Temporary Rock Sediment Dam Type A 1634.02 Temporary Rock Sediment Dam Type B 1635.01 Rock Pipe Inlet Sediment Trap Type A 1635.02 Rock Pipe Inlet Sediment Trap Type B

1640.01 Coir Fiber Baffle 1645.01 Temporary Stream Crossing