

**This electronic collection of documents is provided
for the convenience of the user
and is Not a Certified Document –**


**The documents contained herein were originally issued
and sealed by the individuals whose names and license
numbers appear on each page, on the dates appearing
with their signature on that page.**

**This file or an individual page
shall not be considered a certified document.**

**STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN
BEAUFORT COUNTY**

LOCATION: REPLACE BRIDGE NO.55 OVER PANTEGO CREEK ON US 264

PROJECT REFERENCE NO. <i>B-5300</i>	SHEET NO. <i>SIGN-1</i>
APPROVED: <i>Ayman Alqudwah</i> <small>F30ACSCAF66472</small>	
DATE: 1/21/2016	
SEAL 	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

T.I.P.: B-5300

CONTRACT: C203775A

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	13	LF.
4082000000	903	SUPPORTS, WOOD	92	LF.
4096000000	904	SIGN ERECTION, TYPE D	2	EA.
4102000000	904	SIGN ERECTION, TYPE E	4	EA.
4108000000	904	SIGN ERECTION, TYPE F	2	EA.
4158000000	907	DISPOSAL OF SIGN SYSTEM, WOOD	12	EA.

GENERAL NOTES

- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO WOOD POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON WOOD POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

<u>STD. NO.</u>	<u>TITLE</u>
903.20	WOOD SIGN POST
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


PROJECT NOTES

1	DISPOSAL OF SIGN SYSTEM, WOOD
---	-------------------------------

INDEX

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
SIGN - 1	TITLE SHEET
SIGN - 2	TYPE D SIGNS SHEET
SIGN - 3	TYPE E & F SIGNS SHEET
SIGN - 4	SIGN DETAIL SHEETS

PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT	
<u>AYMAN ALQUDWAH, P.E.</u>	SIGNING & DELINEATION REGIONAL ENGINEER
<u>ERIC E WARD</u>	SIGNING & DELINEATION PROJECT DESIGN ENGINEER

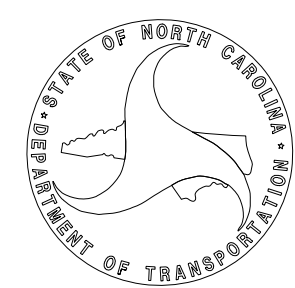


APPROVED: *Ayman Alqudwah*
FS0ACSCAF86472
 DATE: 1/21/2016




**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

401 QUANTITY REQ'D 1

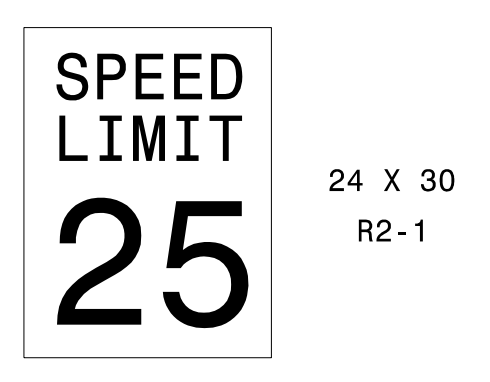


1 WOOD POST PER SIGN

501

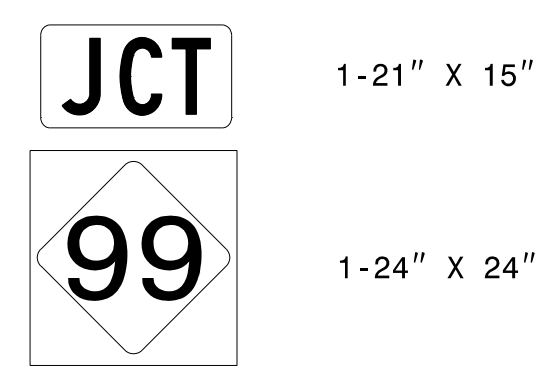


1 WOOD POST PER SIGN

402 QUANTITY REQ'D 1

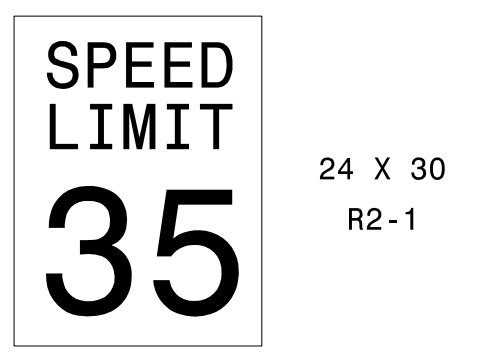


1 WOOD POST PER SIGN

502

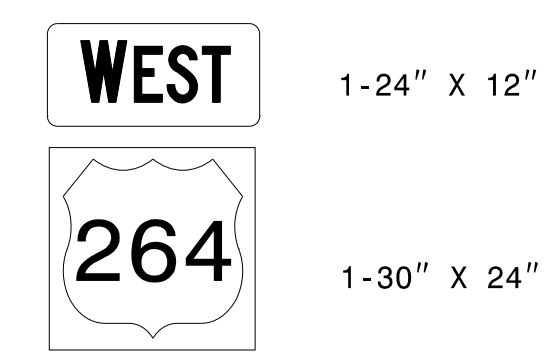

1 WOOD POST PER SIGN


403 QUANTITY REQ'D 1

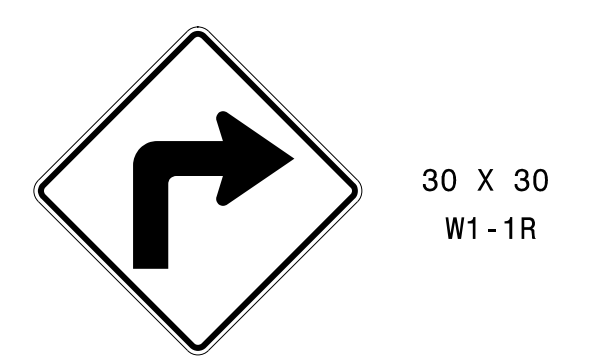

1 WOOD POST PER SIGN

TYPE "F" SIGNS


404 QUANTITY REQ'D 1

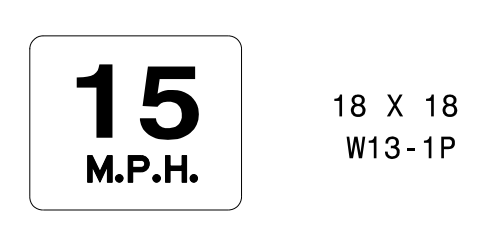

MOUNT BELOW SIGN 403

TYPE "E" SIGNS

TYPE "E" & "F" SIGNS

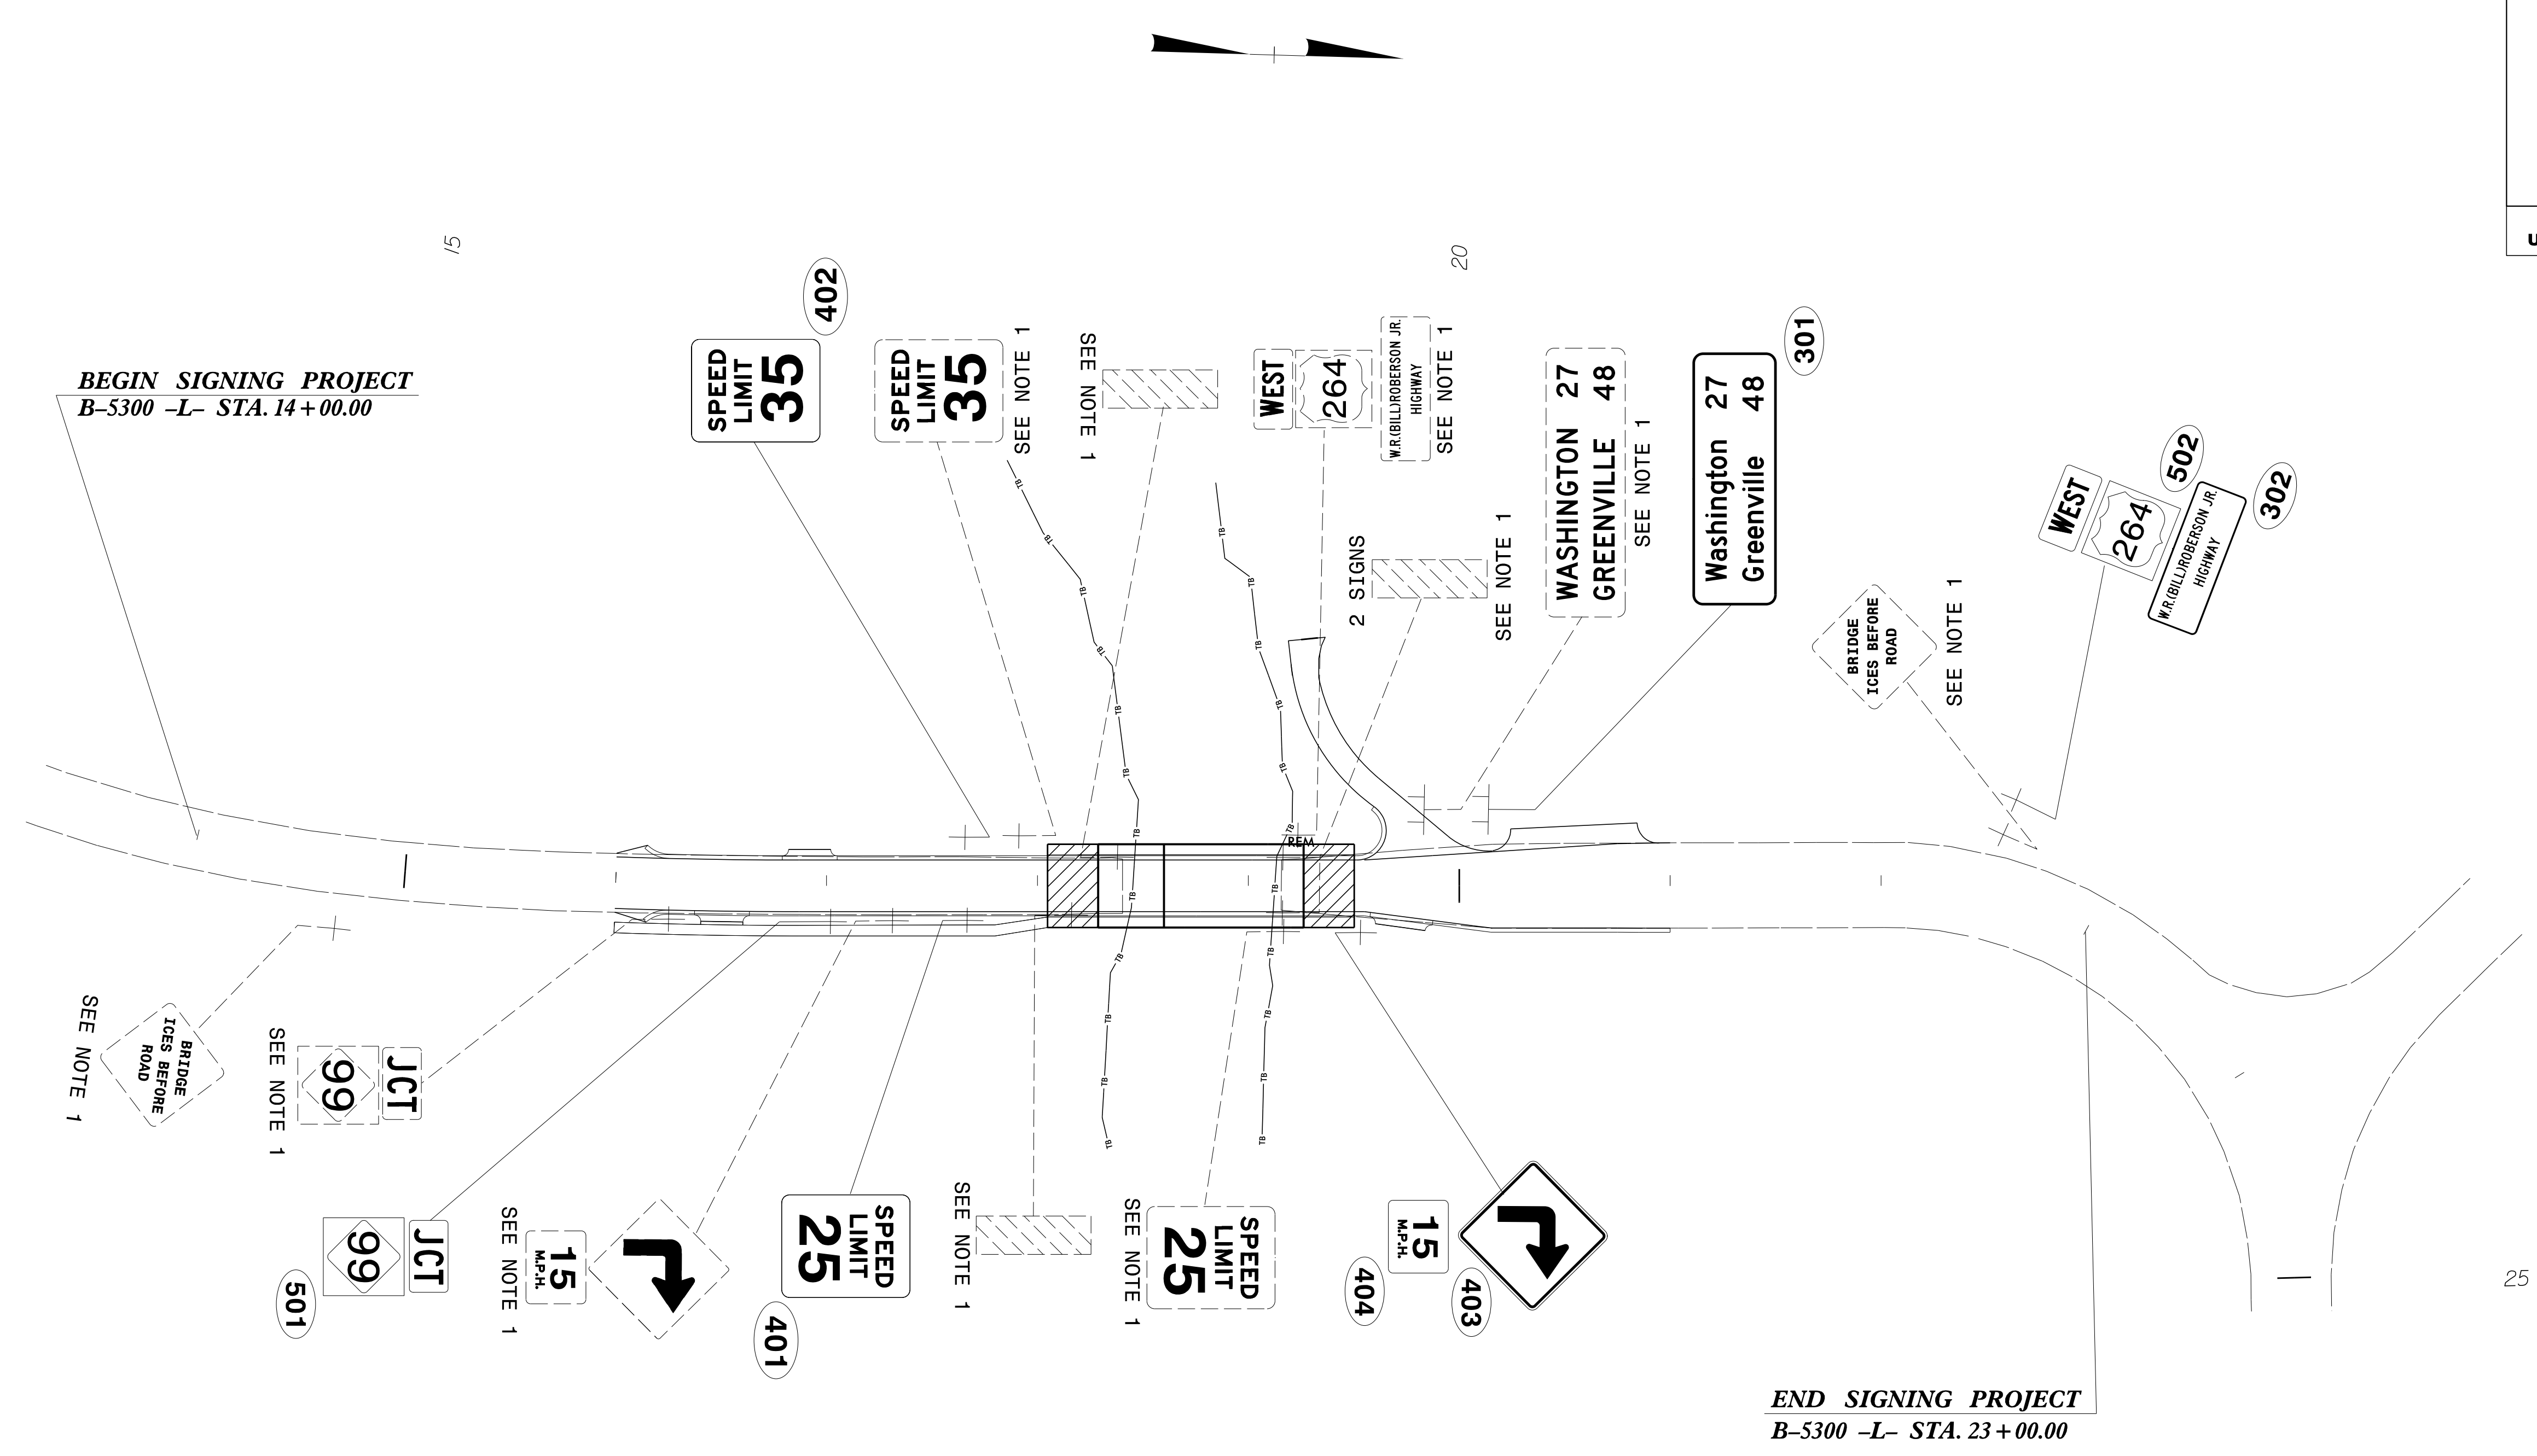

EXISTING & PROPOSED SIGNS
US HWY 264
-L- 14+00 TO 23+00

1/21/2016
 P:\Projects-B\B5300\Traffic\Signing\CA00\Signing Layout Plans\B5300_sgn_psh_s04.dgn
 User:rteward