



PROJ. REFERENCE NO.	SHEET NO.	TOTAL SHEETS
IREDELL COUNTY	11	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION
2016CPT.12.08.10491		PRIMARY RESURFACING
2016CPT.12.08.20491		SECONDARY RESURFACING

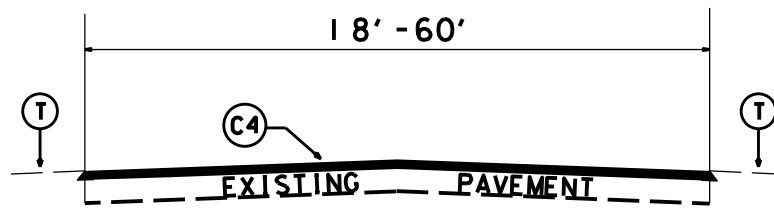


TYPICAL SECTION NO.1

Map 1
 Map 2 Sta. 0+00 to Sta. 295+68
 Map 5 Sta. 113+98 to Sta. 317+73
 Map 6 Sta. 28+15 to Sta. 87+02
 Map 6 Sta. 92+94 to Sta. 198+64
 Map 54 Sta. 0+00 to Sta. 245+47

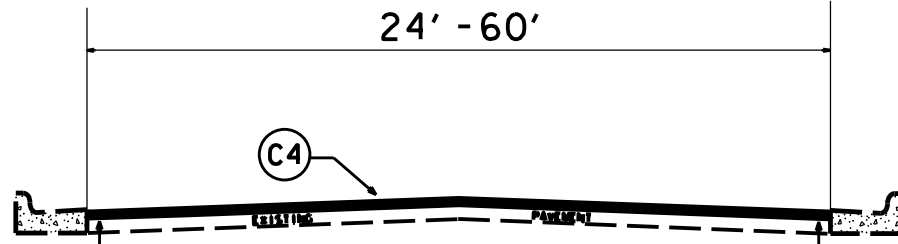


TYPICAL SECTION NO.5

Map 2 Sta. 350+43 to Sta. 388+25
 Map 5 Sta. 104+68 to Sta. 113+98
 Map 6 Sta. 198+64 to Sta. 210+24

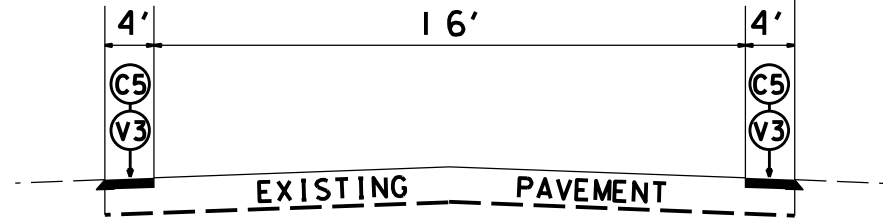


TYPICAL SECTION NO.9

Maps 11 & 12
 •PAVED SHOULDERS ONLY•

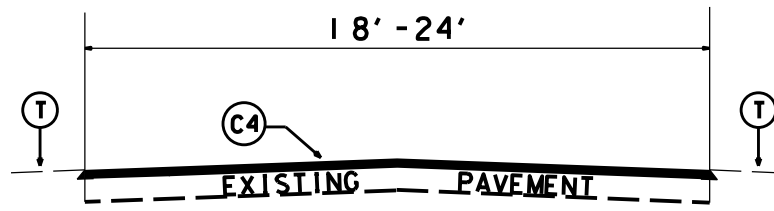


TYPICAL SECTION NO.2

Map 3, 4, 14, 19, 23, 34, 35, 36, 38, 45, 47, 55, 57, 58
 Map 5 Sta. 0+00 to Sta. 104+68
 Map 5 Sta. 321+03 to Sta. 359+20

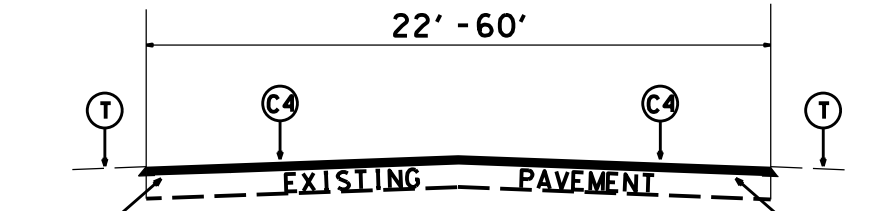


TYPICAL SECTION NO.6

Map 5 Sta. 317+73 to Sta. 321+03
 Map 5 Sta. 359+20 to Sta. 399+93
 Map 5 Sta. 399+93 to Sta. 404+50
 Map 5 Sta. 404+50 to Sta. 421+00
 Map 7 Sta. 73+40 to Sta. 118+80

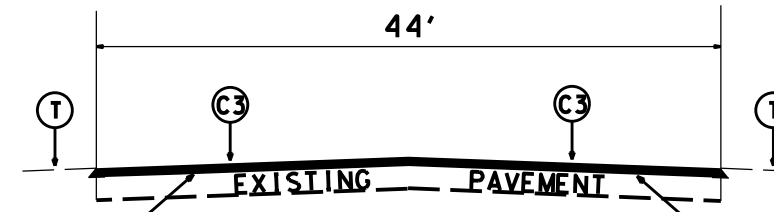


TYPICAL SECTION NO.3

Map 6 Sta. 0+00 to Sta. 28+15

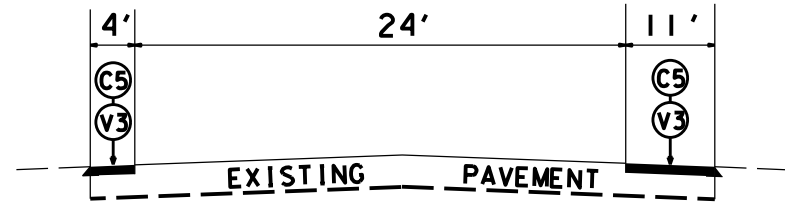


TYPICAL SECTION NO.7

Map 8 Sta. 0+00 to Sta. 27+30
 Map 9
 •PAVED SHOULDERS ONLY•

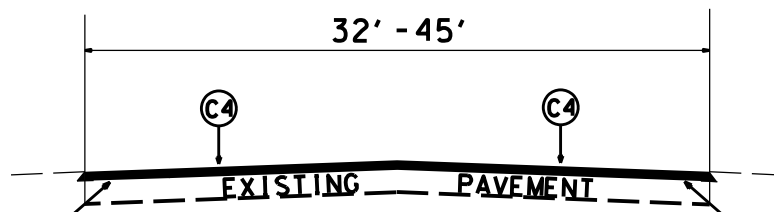

TYPICAL SECTION NO.4

Map 2 Sta. 295+68 to Sta. 350+43
 Map 6 Sta. 87+02 to Sta. 92+94

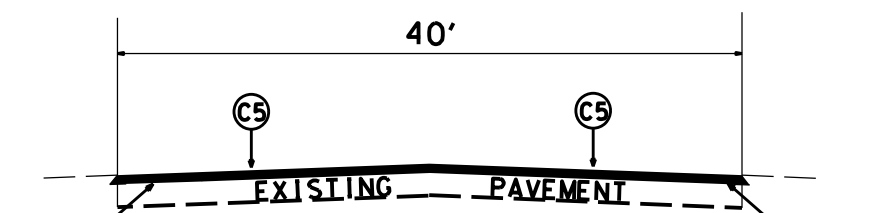

TYPICAL SECTION NO.8

Map 8 Sta. 30+30 to Sta. 61+40
 •FULL WIDTH MILL/FILL•

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.0" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
C2	PROP. APPROX. 3.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LIFTS
C3	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C5	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.
E2	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
V1	MILL EXISTING ASPHALT PAVEMENT APPROX. 4" IN DEPTH IN TWO PASSES FOR A TOTAL DEPTH OF 8"
V2	MILL EXISTING ASPHALT PAVEMENT APPROX. 3" IN DEPTH
V3	MILL EXISTING ASPHALT PAVEMENT APPROX. 2" IN DEPTH
V4	MILL EXISTING ASPHALT PAVEMENT APPROX. 1.5" IN DEPTH
V5	MILL EXISTING ASPHALT PAVEMENT APPROX. 0" TO 1.5" IN DEPTH BEGINNING 5' FROM EDGE OF CURB & GUTTER

2016 - 2017
 Resurfacing Program
 Typical Sections
 Iredell County