



STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.		23	23
WBS NO.	2016CPT.10.22.10601J		

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
C4	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C5	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
D2	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.
D3	PROP. ASPHALT CONCRETE INTERMEDIATE COURSE FOR PAVEMENT REPAIR AT A VARIABLE DEPTH WITH AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 8.0" ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
T1	SHOULDER RECONSTRUCTION
V1	PROFILE MILLING 0" TO 1.5"
V3	MILLING 1.5" DEPTH
V4	MILLING 2.0" DEPTH
V5	MILLING 4" DEPTH

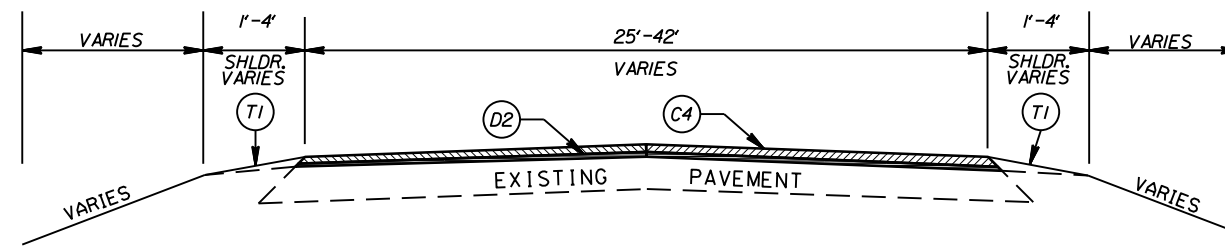

TYPICAL SECTION NO. 26

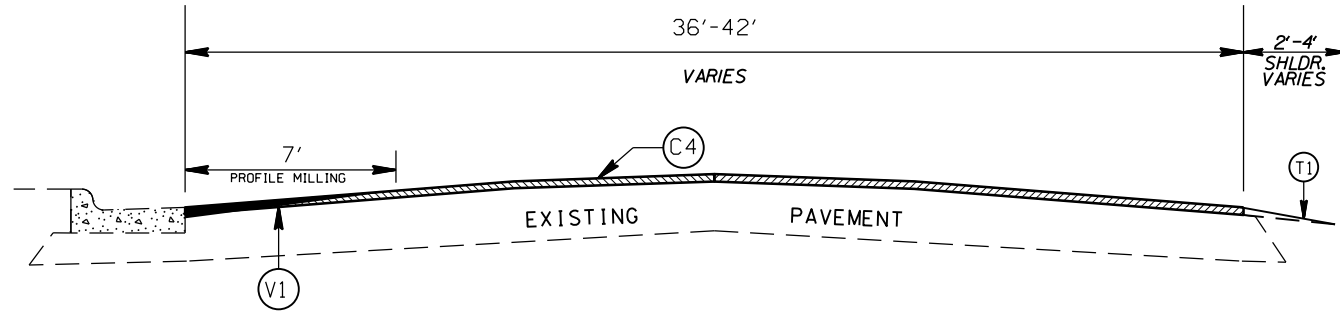

TYPICAL SECTION NO. 27

2016/2017 MECKLENBURG COUNTY RESURFACING

SCALE	-NA-
DATE	4/16
DWG. BY	TJP
DESIGN BY	TJP
APPROVED	WAT



REVISIONS	