
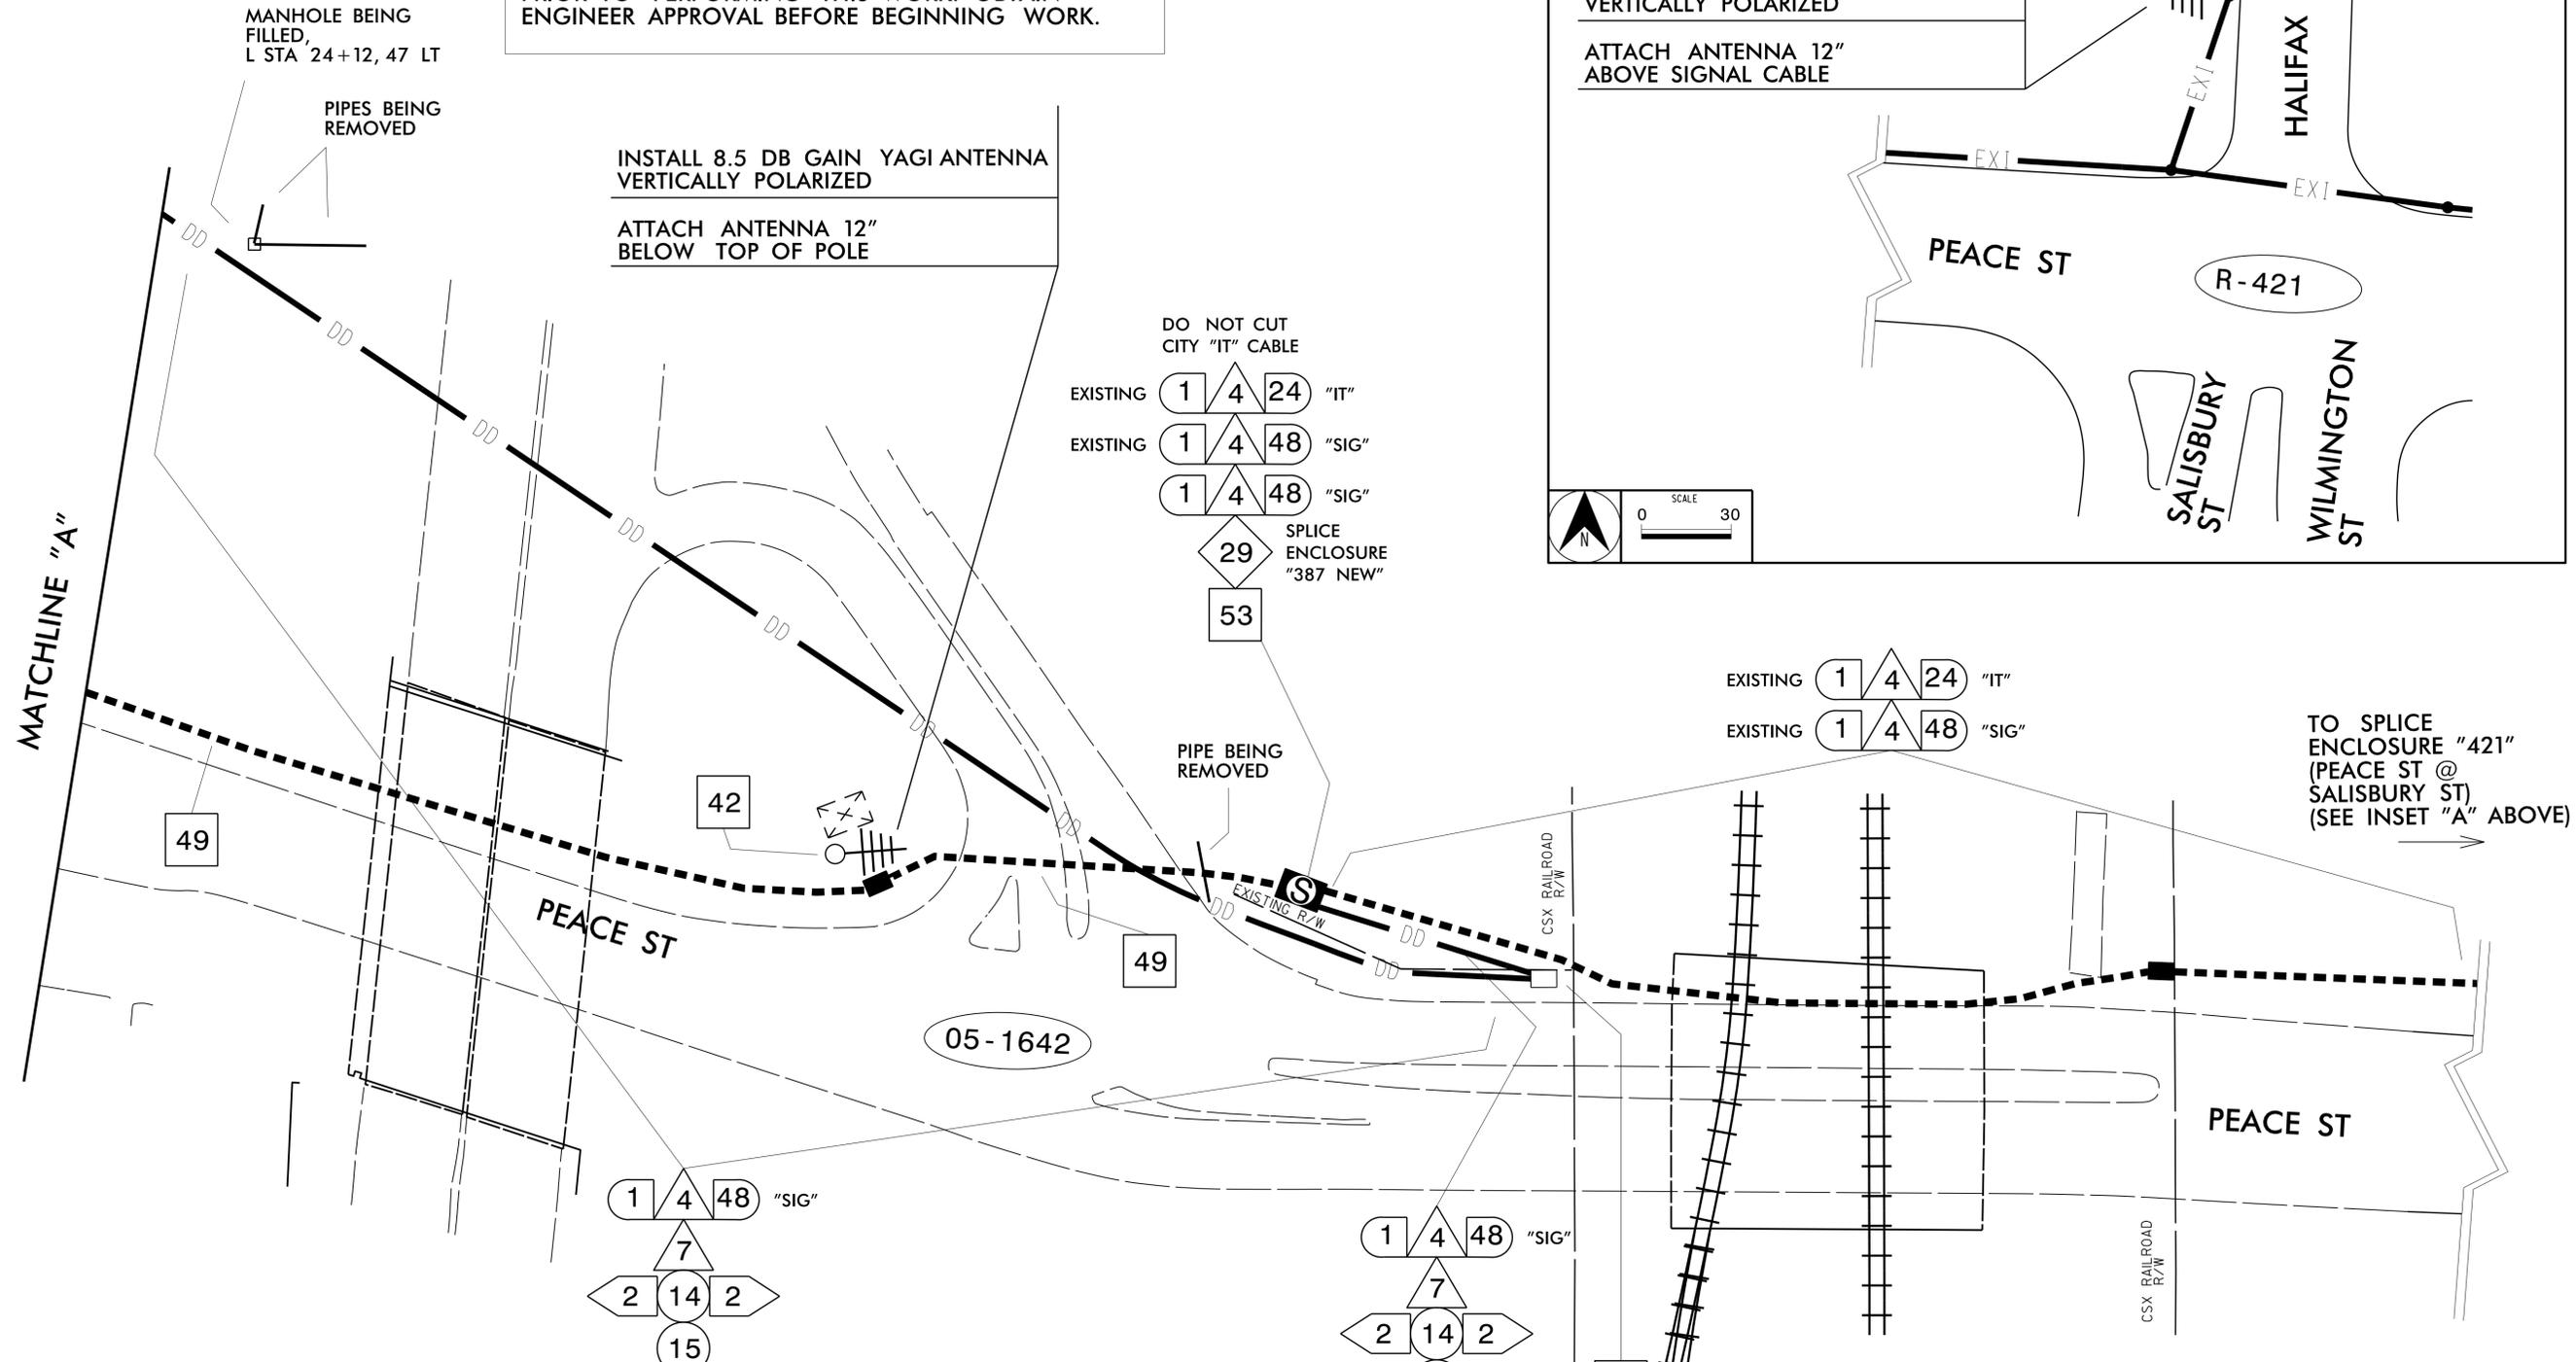


GENERAL NOTE:

INSTALL COMMUNICATION CABLE ID MARKERS ON "SIG" CABLES AT POLES AND IN JUNCTION BOXES. MARK ID MARKER WITH CABLE DESIGNATION "SIG".

ALL UTILITIES MAY NOT HAVE BEEN RELOCATED PRIOR TO PERFORMING THIS WORK. OBTAIN ENGINEER APPROVAL BEFORE BEGINNING WORK.

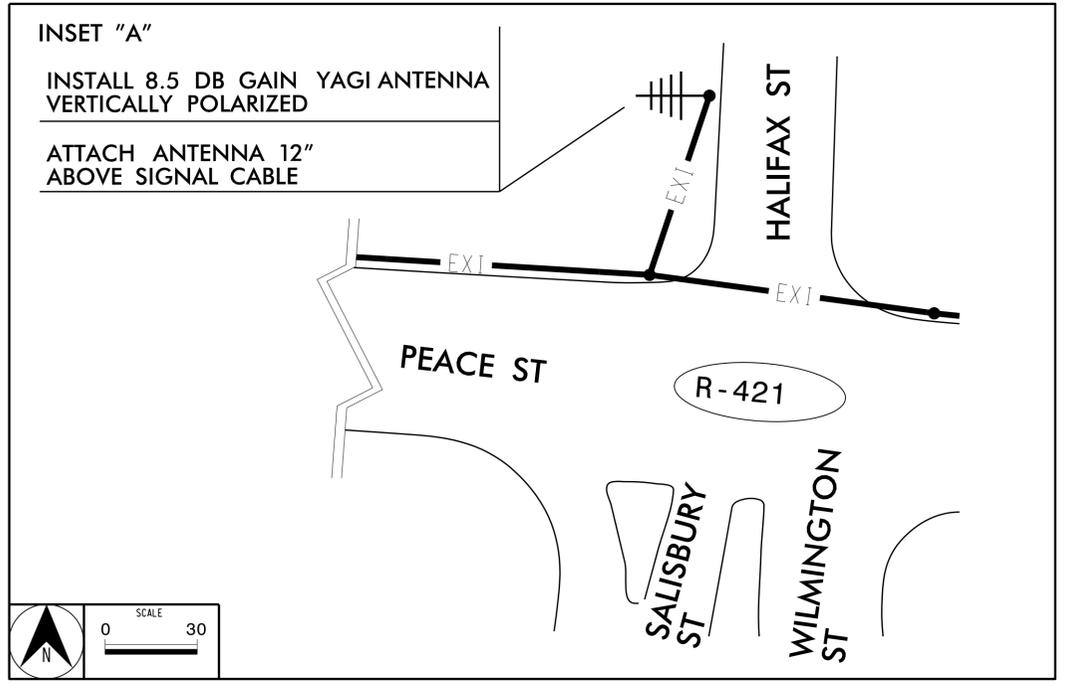

- NOTES:**
1. SURVEY AND RECORD FINAL DRILL DEPTHS EVERY 10' AND PROVIDE TO THE ENGINEER.

LEGEND

- YAGI ANTENNA (DOUBLE) FOR REPEATER OPERATION
- YAGI ANTENNA (SINGLE)
- OMNI ANTENNA
- EXISTING CONTROLLER AND CABINET

PHASE I STAGE I

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

Prepared in the Offices of:

COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS

DIVISION 05 WAKE CO. DocuSigned by: RALEIGH

PLAN DATE: FEBRUARY 2016 REVIEWED BY: [Signature]

PREPARED BY: B.A. STOUCHKO DocuSigned by: [Signature]

750 N. Greenfield Pkwy., Garner, NC 27529

REVISIONS INIT. DATE

SCALE 0 30

DocuSigned by: G. H. Fuller 2/9/2016

SEAL NORTH CAROLINA PROFESSIONAL ENGINEER GREGORY A. FULLER SEAL 023919

CADD Filename: