
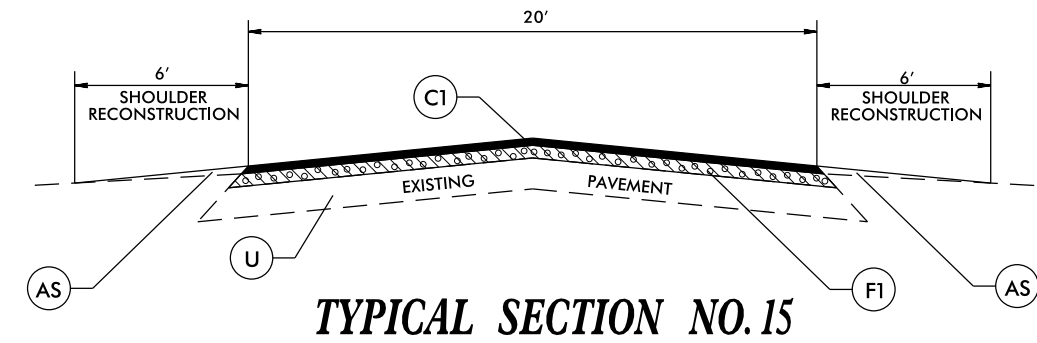
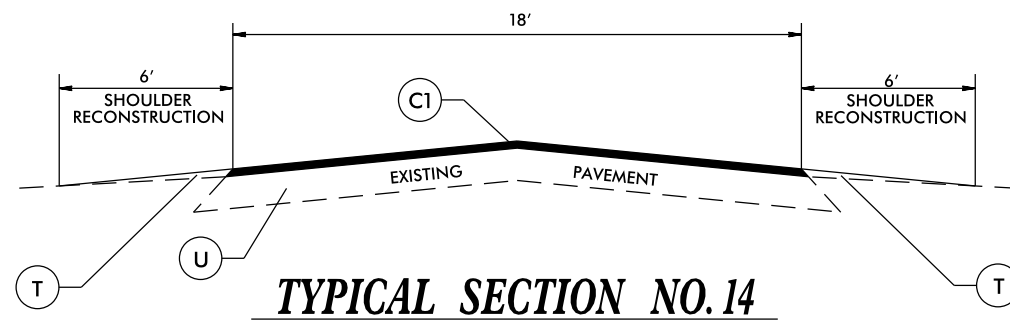
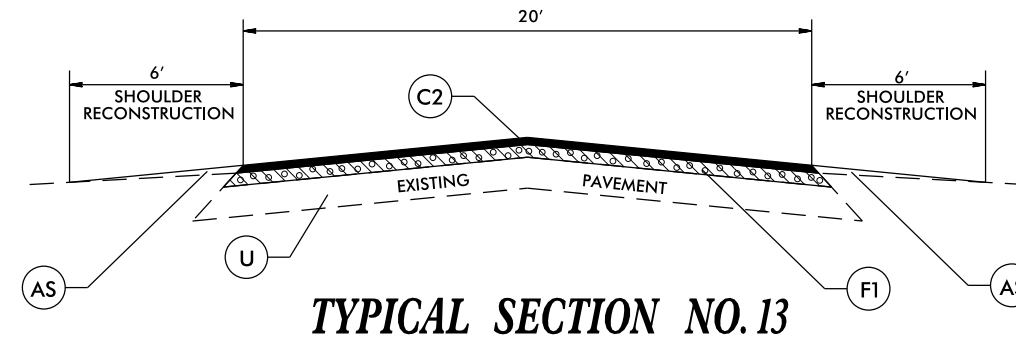


RANDOLPH COUNTY TYPICALS

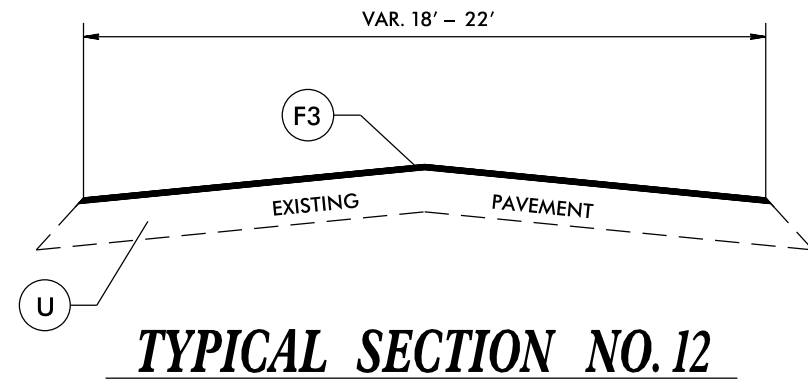

| PAVEMENT SCHEDULE | |
|-------------------|---|
| C1 | PROP. APPROX. 1.25" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD. |
| C2 | PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. |
| D1 | PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285LBS. PER SQ. YD. |
| F1 | ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE |
| F3 | MICROSURFACING, TYPE III |
| AS | AGGREGATE SHOULDER BORROW |
| T | EARTH MATERIAL. |
| U | EXISTING PAVEMENT. |