



PAT McCrory
Governor

NICHOLAS J. TENNYSON
Secretary

August 2, 2016

Addendum No. 1

RE: Contract # C203868
WBS # 52038.3.1
F. A. # NHPP-0040(017)
New Hanover County (I-5760)
I-40 From US-421 To 0.640 Miles East Of I-40

August 16, 2016 Letting

To Whom It May Concern:

Reference is made to the plans and proposal form furnished to you on this project.

The following revision has been made to the plans:

Sheet No.	Revisions
6	Revised the table for Bridge Joint Repair to reflect the below noted quantity changes for "Foam Seal Joint Replacement" and "Elastomeric Joint Repair"

Please void Sheet No. 6 in your plans and staple the revised Sheet No. 6 thereto.

The following revisions have been made to the proposal:

Page No.	Revisions
Proposal Cover	Note added that reads "Includes Addendum No. 1 Dated 08-02-16"
G-30	Removed the last note in the project special provision entitled "Notes To Contractor"

Please void the Proposal Cover and Page G-30 in your proposal and replace with the revised pages.




On the item sheets the following pay item quantity changes have been made:

<u>Item</u>	<u>Description</u>	<u>Old Quantity</u>	<u>New Quantity</u>
005-0000930000-E-SP	Foam Seal Joint Replacement	1,210 LF	724 LF
073-8882000000-E-SP	Joint Repair Using Elastomeric Concrete	408 CF	183 CF

The Contractor's bid must include these pay item quantity changes. The contract will be prepared accordingly.

The Expedite File has been updated to reflect these revisions. Please download the Expedite Addendum File and follow the instructions for applying the addendum. Bid Express will not accept your bid unless the addendum has been applied.

Sincerely,

^{DS}

 R. A. Garris, PE
 Contract Officer

RAG/jag

cc: Mr. Lamar Sylvester, PE	Mr. Ray Arnold, PE
Ms. Karen Collette, PE	Ms. Theresa Canales, PE
Mr. Rodger Rochelle, PE	Ms. Marsha Sample
Mr. R.E. Davenport, PE	Mr. Mike Gwyn
Mr. Ken Kennedy, PE	Mr. Mitchell Dixon
Ms. Jaci Kincaid	Ms. Penny Higgins
Project File (2)	Ms. Lori Strickland

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH, N.C.

PROPOSAL

INCLUDES ADDENDUM No.1 DATED 08-02-16

DATE AND TIME OF BID OPENING: **AUGUST 16, 2016 AT 2:00 PM**

CONTRACT ID C203868
WBS 52038.3.1

FEDERAL-AID NO. NHPP-0040(017)
COUNTY NEW HANOVER
T.I.P. NO. I-5760
MILES 7.442
ROUTE NO. I 140
LOCATION I-140 FROM US-421 TO 0.640 MILES EAST OF I-40.

TYPE OF WORK MILLING, RESURF, SHDR RECON, SIGNALS, BRG APPR & JT REPAIR.

NOTICE:

ALL BIDDERS SHALL COMPLY WITH ALL APPLICABLE LAWS REGULATING THE PRACTICE OF GENERAL CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA WHICH REQUIRES THE BIDDER TO BE LICENSED BY THE N.C. LICENSING BOARD FOR CONTRACTORS WHEN BIDDING ON ANY NON-FEDERAL AID PROJECT WHERE THE BID IS \$30,000 OR MORE, EXCEPT FOR CERTAIN SPECIALTY WORK AS DETERMINED BY THE LICENSING BOARD. BIDDERS SHALL ALSO COMPLY WITH ALL OTHER APPLICABLE LAWS REGULATING THE PRACTICES OF ELECTRICAL, PLUMBING, HEATING AND AIR CONDITIONING AND REFRIGERATION CONTRACTING AS CONTAINED IN CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA. NOTWITHSTANDING THESE LIMITATIONS ON BIDDING, THE BIDDER WHO IS AWARDED ANY FEDERAL - AID FUNDED PROJECT SHALL COMPLY WITH CHAPTER 87 OF THE GENERAL STATUTES OF NORTH CAROLINA FOR LICENSING REQUIREMENTS WITHIN 60 CALENDAR DAYS OF BID OPENING.

BIDS WILL BE RECEIVED AS SHOWN BELOW:

THIS IS A ROADWAY PROPOSAL

5% BID BOND OR BID DEPOSIT REQUIRED

STATE HIGHWAY ADMINISTRATOR TITLE CHANGE:

(9-18-12)

SP1 G185

Revise the *2012 Standard Specifications* as follows:

Replace all references to “State Highway Administrator” with “Chief Engineer”.

SUBLETTING OF CONTRACT:

(11-18-2014)

108-6

SP1 G186

Revise the *2012 Standard Specifications* as follows:

Page 1-66, Article 108-6 Subletting of Contract, line 37, add the following as the second sentence of the first paragraph:

All requests to sublet work shall be submitted within 30 days of the date of availability or prior to expiration of 20% of the contract time, whichever date is later, unless otherwise approved by the Engineer.

Page 1-67, Article 108-6 Subletting of Contract, line 7, add the following as the second sentence of the fourth paragraph:

Purchasing materials for subcontractors is not included in the percentage of work required to be performed by the Contractor. If the Contractor sublets items of work but elects to purchase material for the subcontractor, the value of the material purchased will be included in the total dollar amount considered to have been sublet.

NOTES TO CONTRACTOR:

Map Nos. 1- 4: *Patching Existing Pavement (Mill)* and *Patching Existing Pavement (Full Depth)* shall be performed after milling is completed.

Map Nos. 1 & 2 (I-140 EB & WB): Contractor shall perform *Debris Removal Existing Shoulder Berm Gutter* only one time near the completion of this project.

Map Nos. 1, 2, 13, 16, 21 & 22: Grinding shall NOT be permitted to complete *Removal of Pavement Marking Lines (4”)* on all Bridges.

Map Nos. 7 & 10: Excavation within 1,000 feet of a signalized intersection will require a one (1) week notification (prior to excavation) to the NCDOT Traffic Services Signal unit at telephone number (910) 341-0300. All traffic signal or detection cables must be located prior to excavation. Cost to replace or repair NCDOT signs, signals, or associated equipment shall be the responsibility of the Contractor.

County: New Hanover

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
ROADWAY ITEMS						
0001	0000100000-N	800	MOBILIZATION	Lump Sum	L.S.	
0002	0000915000-N	SP	GENERIC MISCELLANEOUS ITEM BRIDGE APPROACH SLAB INVESTIGATION	30 EA		
0003	0000915000-N	SP	GENERIC MISCELLANEOUS ITEM BRIDGE SLOPE PROTECTION INVESTIGATION	10 EA		
0004	0000930000-E	SP	GENERIC MISCELLANEOUS ITEM DEBRIS REMOVAL FROM EXISTING SHOULDER BERM GUTTER	8,740 LF		
0005	0000930000-E	SP	GENERIC MISCELLANEOUS ITEM FOAM SEAL JOINT REPLACEMENT	724 LF		
0006	0000990000-E	SP	GENERIC MISCELLANEOUS ITEM SOIL STABILIZATION FOAM	1,800 GAL		
0007	0000990000-E	SP	GENERIC MISCELLANEOUS ITEM STRUCTURAL FOAM VOID FILL/STABILIZATION	10 GAL		
0008	0255000000-E	SP	GENERIC GRADING ITEM AGGREGATE SHOULDER BORROW	1,261 TON		
0009	1077000000-E	SP	#57 STONE	3 TON		
0010	1245000000-E	SP	SHOULDER RECONSTRUCTION	38.04 SMI		
0011	1297000000-E	607	MILLING ASPHALT PAVEMENT, **** DEPTH (2-1/2")	28,160 SY		
0012	1308000000-E	607	MILLING ASPHALT PAVEMENT, **** TO ***** (0" TO 1-1/2")	6,690 SY		
0013	1330000000-E	607	INCIDENTAL MILLING	10,795 SY		
0014	1503000000-E	610	ASPHALT CONC INTERMEDIATE COURSE, TYPE I19.0C	4,222 TON		
0015	1523000000-E	610	ASPHALT CONC SURFACE COURSE, TYPE S9.5C	29,684 TON		
0016	1524000000-E	SP	ASPHALT CONC SURFACE COURSE, TYPE S9.5C (LEVELING COURSE)	275 TON		

County: New Hanover

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0017	1575000000-E	620	ASPHALT BINDER FOR PLANT MIX	1,975	TON	
0018	1840000000-E	665	MILLED RUMBLE STRIPS (ASPHALT CONCRETE)	157,164	LF	
0019	1880000000-E	SP	GENERIC PAVING ITEM PATCHING EXISTING PAVEMENT (FULL DEPTH)	417	TON	
0020	1880000000-E	SP	GENERIC PAVING ITEM PATCHING EXISTING PAVEMENT (MILL)	500	TON	
0021	1891000000-E	SP	GENERIC PAVING ITEM FINE MILLING (1-1/2")	16,636	SY	
0022	2752000000-E	SP	GENERIC PAVING ITEM REMOVE AND REPLACE SHOULDER BERM GUTTER	50	LF	
0023	3210000000-N	862	GUARDRAIL ANCHOR UNITS, TYPE CAT-1	1	EA	
0024	3420000000-E	SP	GENERIC GUARDRAIL ITEM REMOVE AND REPLACE EXISTING GUARDRAIL	100	LF	
0025	4400000000-E	1110	WORK ZONE SIGNS (STATIONARY)	406	SF	
0026	4405000000-E	1110	WORK ZONE SIGNS (PORTABLE)	485	SF	
0027	4410000000-E	1110	WORK ZONE SIGNS (BARRICADE MOUNTED)	32	SF	
0028	4415000000-N	1115	FLASHING ARROW BOARD	2	EA	
0029	4420000000-N	1120	PORTABLE CHANGEABLE MESSAGE SIGN	3	EA	
0030	4422000000-N	1120	PORTABLE CHANGEABLE MESSAGE SIGN (SHORT TERM)	30	DAY	
0031	4430000000-N	1130	DRUMS	200	EA	
0032	4445000000-E	1145	BARRICADES (TYPE III)	36	LF	
0033	4480000000-N	1165	TMA	1	EA	

County: New Hanover

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0034	4510000000-N	SP	LAW ENFORCEMENT	200 HR		
0035	4600000000-N	SP	GENERIC TRAFFIC CONTROL ITEM WORK ZONE DIGITAL SPEED LIMIT SIGN	3 EA		
0036	4650000000-N	1251	TEMPORARY RAISED PAVEMENT MARKERS	1,358 EA		
0037	4688000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (6", 90 MILS)	199,261 LF		
0038	4690000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (6", 120 MILS)	20,250 LF		
0039	4700000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (12", 90 MILS)	10,700 LF		
0040	4710000000-E	1205	THERMOPLASTIC PAVEMENT MARKING LINES (24", 120 MILS)	80 LF		
0041	4725000000-E	1205	THERMOPLASTIC PAVEMENT MARKING SYMBOL (90 MILS)	29 EA		
0042	4770000000-E	1205	COLD APPLIED PLASTIC PAVEMENT MARKING LINES, TYPE ** (4") (IV)	23,505 LF		
0043	4780000000-E	1205	COLD APPLIED PLASTIC PAVEMENT MARKING LINES, TYPE ** (8") (IV)	500 LF		
0044	4805000000-N	1205	COLD APPLIED PLASTIC PAVEMENT MARKING SYMBOL, TYPE ** (II)	8 EA		
0045	4805000000-N	1205	COLD APPLIED PLASTIC PAVEMENT MARKING SYMBOL, TYPE ** (IV)	8 EA		
0046	4810000000-E	1205	PAINT PAVEMENT MARKING LINES (4")	219,511 LF		
0047	4820000000-E	1205	PAINT PAVEMENT MARKING LINES (8")	9,400 LF		
0048	4835000000-E	1205	PAINT PAVEMENT MARKING LINES (24")	80 LF		
0049	4845000000-N	1205	PAINT PAVEMENT MARKING SYMBOL	29 EA		



County: New Hanover

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0050	4847100000-E	1205	POLYUREA PAVEMENT MARKING LINES (6", *****) (HIGHLY REFLECTIVE ELEMENTS)	23,505 LF		
0051	4847120000-E	1205	POLYUREA PAVEMENT MARKING LINES (12", *****) (HIGHLY REFLECTIVE ELEMENTS)	500 LF		
0052	4850000000-E	1205	REMOVAL OF PAVEMENT MARKING LINES (4")	23,505 LF		
0053	4865000000-E	1205	REMOVAL OF PAVEMENT MARKING LINES (12")	500 LF		
0054	4890000000-E	SP	GENERIC PAVEMENT MARKING ITEM POLYUREA PAVEMENT MARKING LINES, 6" BLACK	3,310 LF		
0055	4900000000-N	1251	PERMANENT RAISED PAVEMENT MARKERS	178 EA		
0056	4905000000-N	1253	SNOWPLOWABLE PAVEMENT MARKERS	1,180 EA		
0057	6000000000-E	1605	TEMPORARY SILT FENCE	1,991 LF		
0058	6009000000-E	1610	STONE FOR EROSION CONTROL, CLASS B	498 TON		
0059	6012000000-E	1610	SEDIMENT CONTROL STONE	498 TON		
0060	6015000000-E	1615	TEMPORARY MULCHING	18.93 ACR		
0061	6018000000-E	1620	SEED FOR TEMPORARY SEEDING	1,000 LB		
0062	6021000000-E	1620	FERTILIZER FOR TEMPORARY SEEDING	4.98 TON		
0063	6036000000-E	1631	MATTING FOR EROSION CONTROL	300 SY		
0064	6042000000-E	1632	1/4" HARDWARE CLOTH	768 LF		
0065	6071010000-E	SP	WATTLE	320 LF		
0066	6084000000-E	1660	SEEDING & MULCHING	17.92 ACR		
0067	6090000000-E	1661	SEED FOR REPAIR SEEDING	1,000 LB		

County : New Hanover

Line #	Item Number	Sec #	Description	Quantity	Unit Cost	Amount
0068	6093000000-E	1661	FERTILIZER FOR REPAIR SEEDING	4.97	TON	
0069	6117000000-N	SP	RESPONSE FOR EROSION CONTROL	20	EA	
0070	7324000000-N	1716	JUNCTION BOX (STANDARD SIZE)	1	EA	
0071	7444000000-E	1725	INDUCTIVE LOOP SAWCUT	1,600	LF	
0072	7456000000-E	1726	LEAD-IN CABLE (***** (14-2)	400	LF	
0073	8882000000-E	SP	GENERIC STRUCTURE ITEM JOINT REPAIR USING ELASTOMERIC CONCRETE	183	CF	
0851/Aug02/Q816706.84/D288904000000/E73			Total Amount Of Bid For Entire Project :			

BRIDGE LOCATION MAPS, JOINT REPAIR & BRIDGE APPROACH TABLES

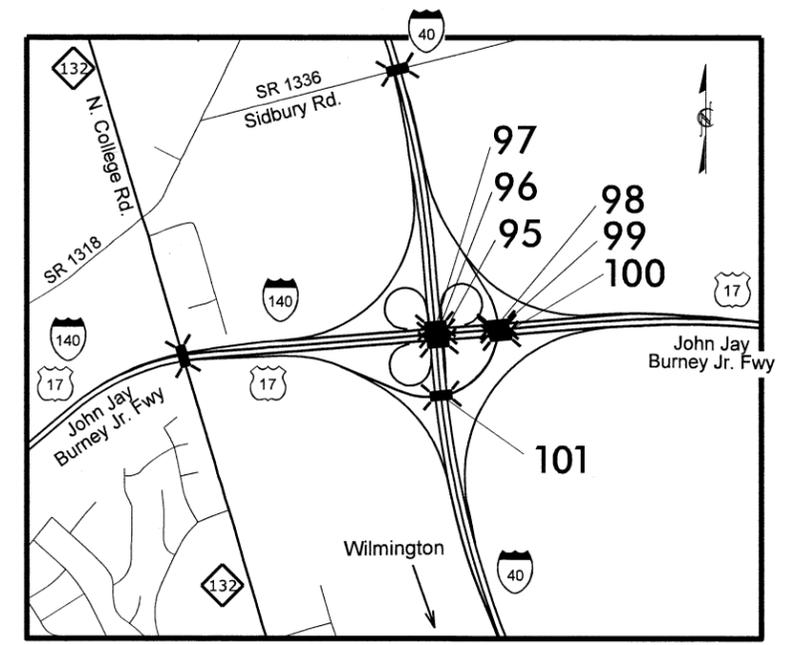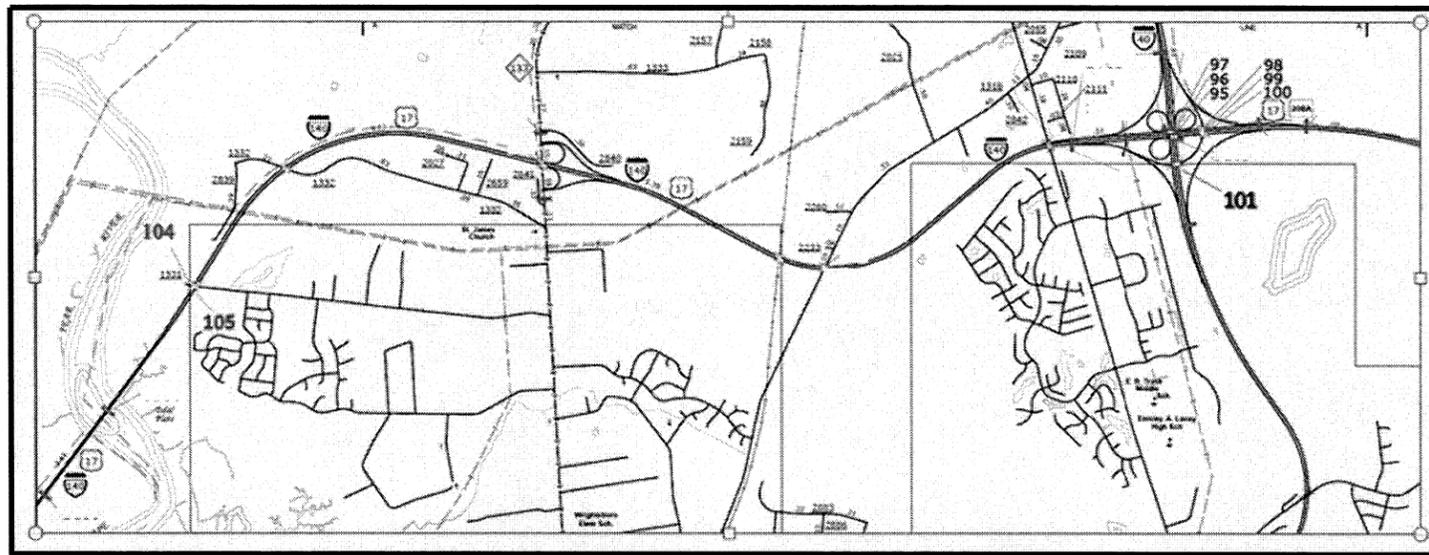

I-140 Bridge Joint Repair


Map #	Bridge #	# Joints	Width	Foam Seal Jt. Replacement (LF)	Elastomeric Joint Repair (CF)
2	104	2	40	80	20
1	105	2	40	80	20
13	101	2	40	80	20
21	100	2	47	94	24
22	99	2	40	80	20
16	98	2	28	56	15
16	97	2	47	94	24
2	96	2	40	80	20
1	95	2	40	80	20
Total:				724	183

I-140 Bridge Approach and Slope Protection Investigation

Map #	Bridge #	# Approaches	# Slopes	Approach and Slope Location	Approach Investigation (EACH)	Slope Investigations (EACH)
1	98	2	2	Leading/Trailing	10	4
2	96	1	1	Leading	10	3
16	95	1	1	Leading	10	3
Total:					30	10

I-140 Bridge Approach and Slope Protection Repair

Map #	Bridge #	Soil Stabilization Foam(GAL)	Foam Void Fill (Gal)	#57 Stone (TON)
1	98	600	4	1
2	96	600	3	1
16	95	600	3	1
Total:		1800	10	3

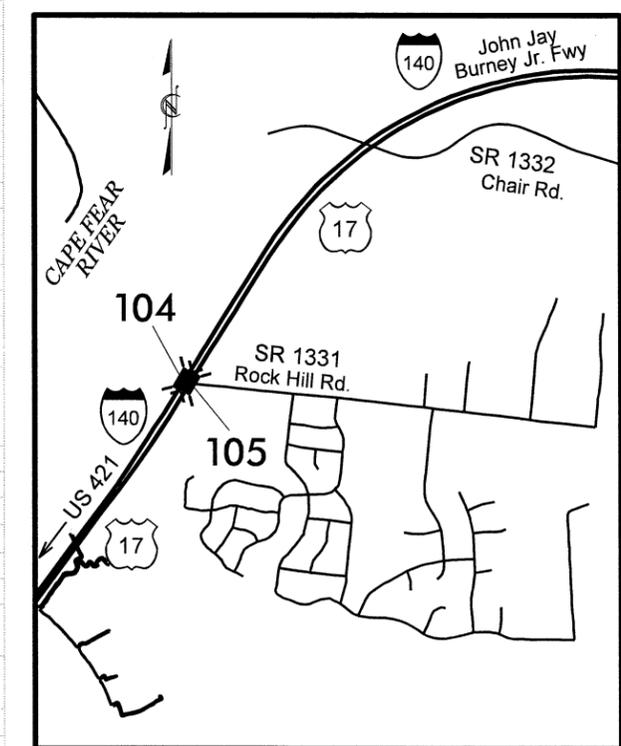

REVISIONS

8/17/99
S:\Contracts\Resurfacing Projects\Division 3\I-5760 New Hanover (August 2016 Letting)\Revised Files\I-5760 I-140 Bdy App BEV 2.dgn