

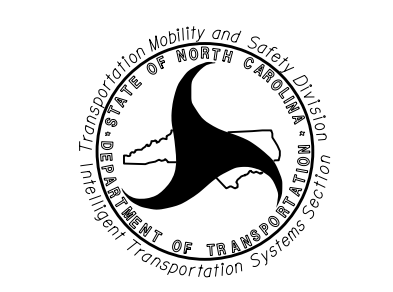

- 1) RECORD THE EXISTING SPLICE ARRANGEMENTS IN "AERIAL SPLICE ENCLOSURE #3" AND THE "SIGNAL CABINET GBO-041" FOR COMPARISON TO THE SUPPLIED SPLICE PLANS FOR FUTURE USE IN THE FINAL PHASE OF CONSTRUCTION "TMP-FINAL". IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED IN THE FINAL CONSTRUCTION PHASE.
- 2) REMOVE 6-FIBER DROP CABLE FROM "SIGNAL CABINET GBO-041" AND BACK PULL TO "POWER POLE #1" AND ABANDON.
- 3) REMOVE 6-FIBER DROP CABLE FROM "EXISTING AERIAL SPLICE ENCLOSURE #3" AND RE-TERMINATE REMAINING FIBER AS SHOWN IN SPLICE PLANS. ABANDON REMAINING FIBER IN PLACE.
- 4) REMOVE 6-FIBER DROP CABLE FROM "EXISTING AERIAL SPLICE ENCLOSURE #4" AND SPLICE REMAINING FIBER AS SHOWN IN THESE PLANS. REMOVE REMAINING FIBER AND MESSENGER CABLE BETWEEN "EXISTING AERIAL SPLICE ENCLOSURE #4" AND "GBO-010".
- 5) SAVE ETHERNET SWITCH FOR RE-INSTALLATION IN THE NEW SIGNAL CABINET DURING THE FINAL PHASE OF CONSTRUCTION "TMP-FINAL".
- 6) REMOVE CCTV CAMERA, CAMERA CONTROL UNIT, CITY NETWORK ACCESS POINT AND METAL POLE. MAKE ARRANGEMENTS WITH THE CITY TRAFFIC ENGINEER JOE MULLINAX (336) 373-2860 FOR DELIVERY OF THE REMOVED CCTV CAMERA EQUIPMENT, CITY NETWORK EQUIPMENT AND METAL POLE TO THE CITY TRANSPORTATION YARD LOCATED AT 401 PATTON AVENUE IN GREENSBORO. IN THE PRESENCE OF THE ENGINEER, ENSURE THE CCTV CAMERA, CAMERA CONTROL UNIT, AND CITY NETWORK ACCESS POINT ARE IN WORKING ORDER PRIOR TO REMOVAL, CONTRACTOR IS RESPONSIBLE FOR ANY DAMAGE DURING REMOVAL AND TRANSPORTATION TO THE CITY.
- 7) REMOVE FOUNDATION AND BACKFILL VOID LEFT FROM THE REMOVAL OF THE FOUNDATION BACK TO GRADE USING SUITABLE MATERIAL. TAMP BACKFILL MATERIAL IN 12 INCH LIFTS.

**GENERAL NOTES:**

- 1) NOTIFY THE CITY OF GREENSBORO TRANSPORTATION ENGINEER, JOE MULLINAX, AT (336) 373-2860; 5 DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM COMMUNICATIONS CABLE. NOTIFY THE TRANSPORTATION ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. ALL WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.

**TMP PHASE 1**

**DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED**

 <p>750 N. Greenfield Pkwy., Garner, NC 27529</p>	<p><b>COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS</b></p>		 <p>SEAL GREGORY A. FULLER ENGINEER 023919</p>
	<p>DIVISION 07 GUILFORD COUNTY</p> <p>PLAN DATE: APRIL 2016</p> <p>PREPARED BY: A. J. SKUCE</p>	<p>REVIEWED BY: <i>Gregory A. Fuller</i></p> <p>DATE: 4/28/2016</p>	