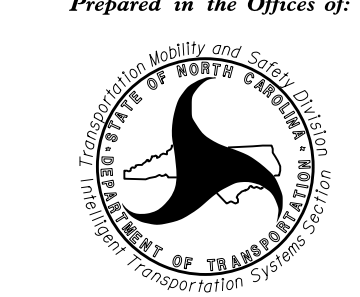



GENERAL NOTE
 NOTIFY THE CITY OF JACKSONVILLE TRANSPORTATION ENGINEER, ROBERT MYERS, AT (910) 938-5070 5 DAYS PRIOR TO BEGINNING WORK ON SIGNAL SYSTEMS COMMUNICATION CABLE. NOTIFY THE CITY TRANSPORTATION ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY.

- 1) INSTALL NEW UNDERGROUND SPLICE ENCLOSURE IN EXISTING JUNCTION BOX "A" AND PULL NEW FIBER TO THE RELOCATED SIGNAL CONTROLLER CABINET AS SHOWN.
- 2) INSTALL NEW HIGH DEFINITION CCTV CAMERA ON METAL SIGNAL POLE. INSTALL NEW POWER OVER ETHERNET CABLE THROUGH METAL POLE. USE 2" HALF COUPLING WITH INTERNAL THREADS LOCATED AT THE TOP OF THE POLE TO BRING THE POWER OVER ETHERNET CABLE OUT OF POLE WITH A 2" WEATHERHEAD.

TMP FINAL (STEP 2) **DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

 750 N. Greenfield Pkwy., Garner, NC 27529	COMMUNICATIONS CABLE AND CONDUIT ROUTING PLANS		SEAL  SEAL 023919 GREGORY A. FULLER ENGINEER
	DIVISION 03 ONSLOW CO. JACKSONVILLE		
	PLAN DATE: SEPTEMBER, 2016	REVIEWED BY:	
PREPARED BY: I. N. AVERY	REVIEWED BY: G. A. FULLER	REVISIONS	INIT. DATE
SCALE: 0 30'		DocuSigned by: Gregory A. Fuller 9/21/2016	
CADD File name:		DATE	