

ALTERNATE PHASING ACTIVATION DETAIL

TO RUN ALT. PHASING DURING FREE RUN - PROGRAM CHANGES (SHOWN BELOW) IN A TIME BASED ACTION PLAN. SCHEDULE A DAY PLAN THAT INCLUDES THE ACTION PLAN PROGRAMMED TO SELECT VEH DET PLAN 2 AND ENABLE SF BITS 1 AND 5.

TO RUN ALT. PHASING DURING COORDINATION - SELECT THE TIME BASED ACTION PLAN THAT IS PROGRAMMED TO SELECT VEH DET PLAN 2 AND ENABLE SF BITS 1 AND 5.

<u>PHASING</u>	<u>VEH DET PLAN</u>	<u>SF BITS ENABLED</u>
ACTIONS REQUIRED TO RUN <u>DEFAULT PHASING</u>	1	NONE
ACTIONS REQUIRED TO RUN <u>ALTERNATE PHASING</u>	2	1.5

IMPORTANT: IF ALT. PHASING IS USED DURING FREE RUN AND COORDINATION, DO NOT OPERATE TIME OF DAY EVENTS CONCURRENTLY WITH COORDINATION PLAN EVENTS IN THE EVENT SCHEDULER. (EX. FREE RUN EVENT SHOULD END BEFORE COORDINATION PLAN EVENT STARTS AND VICE-VERSA).

ALTERNATE PHASING CHANGE SUMMARY

THE FOLLOWING IS A SUMMARY OF WHAT TAKES PLACE WHEN SF BITS 1 AND 5 AND VEH DET PLAN 2 ACTIVATE TO CALL THE "ALTERNATE PHASING":

SF BITS 1 AND 5: Modifies overlap parent phases for heads 11 and 51 to run protected turns only.

VEH DET PLAN 2: Disables phase 6 call on loop 1A and reduces delay time for phase 1 call on loop 1A to 0 seconds.

Disables phase 2 call on loop 5A and reduces delay time for phase 5 call on loop 5A to 0 seconds.

ECONOLITE ASC/3-2070 ACTION PLAN PROGRAMMING DETAIL

1. From Main Menu select 5. TIME BASE
2. From TIME BASE Submenu select 2. ACTION PLAN

```

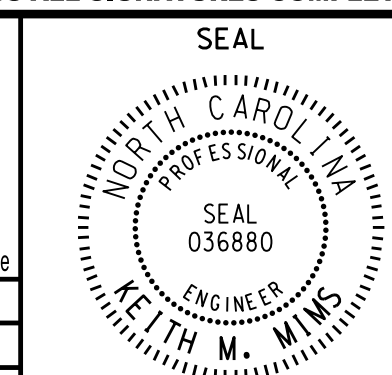
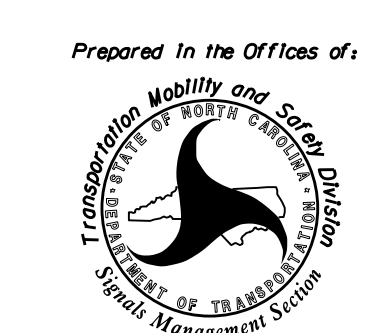

ACTION PLAN...[ 1]
PATTERN.....AUTO   SYS OVERRIDE.... NO
TIMING PLAN..... 0   SEQUENCE..... 0
VEH DETECTOR PLAN.. 2   DET LOG.....NONE
FLASH..... --   RED REST..... NO
VEH DET DIAG PLN... 0   PED DET DIAG PLN..0
DIMMING ENABLE.. NO   PRIORITY RETURN. NO
PED PR RETURN.. NO   QUEUE DELAY..... NO
PMT COND DELAY    NO

  PHASE  1  2  3  4  5  6  7  8  9  0  1  2  3  4  5  6
PED RCL  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
WALK 2   .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
VEX 2    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
VEH RCL  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
MAX RCL  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
MAX 2    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
  PHASE  1  2  3  4  5  6  7  8  9  0  1  2  3  4  5  6
MAX 3    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
CS INH  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
OMIT    .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
SPC FCT  X  .  .  .  X  .  .  .  (1-8)
AUX FCT  .  .  .  (1-3)
          1  2  3  4  5  6  7  8  9  0  1  2  3  4  5
LP 1-15  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 16-30 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 31-45 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 46-60 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 61-75 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 76-90 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .
LP 91-100 .  .  .  .  .  .  .  .  .  .  .  .  .  .  .  .

```

THIS ELECTRICAL DETAIL IS FOR
 THE SIGNAL DESIGN: 06-0448
 DESIGNED: August 2016
 SEALED: 10-07-16
 REVISED: N/A

Electrical Detail Sheet 3 of 3

ELECTRICAL AND PROGRAMMING DETAILS FOR:	US 401 (Ramsey Street) at SR 1615 (Stacy Weaver Drive) / Entrance to Methodist College	SEAL 
Prepared In the Offices of: 		DocuSigned by:  10/31/2016 DATE
PLAN DATE: October 2016 REVIEWED BY: PREPARED BY: James Peterson REVIEWED BY:		
REVISIONS INIT. DATE		SIG. INVENTORY NO. 06-0448

10-30-2016 07:07
 S:\MITS\0615\Sig\Signal\work\hgr\0615\Sig_Mon\ Peterson\060448_sml.ele_xxxx.dgn
 Peterson