WBS ELEMENT	SHEET NO.
2017CPT.08.12.20191 2017CPT.08.12.20531	7

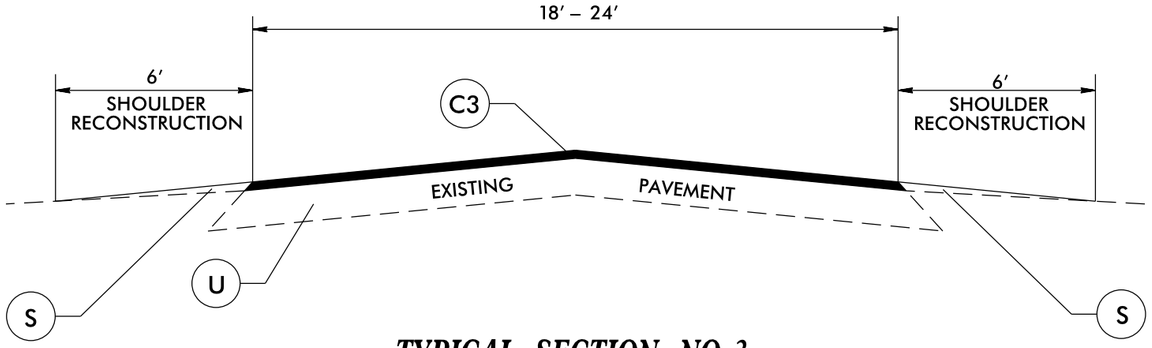

TYPICAL SECTION NO. 3

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.25″ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1.5″ ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
F1	ASPHALT SURFACE TREATMENT, MATCOAT #67 STONE
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.
V1	MILLING 1.5″ IN DEPTH

DETAILS OF PATCHING EXISTING PAVEMENT PRIOR TO RESURFACING

DETAIL

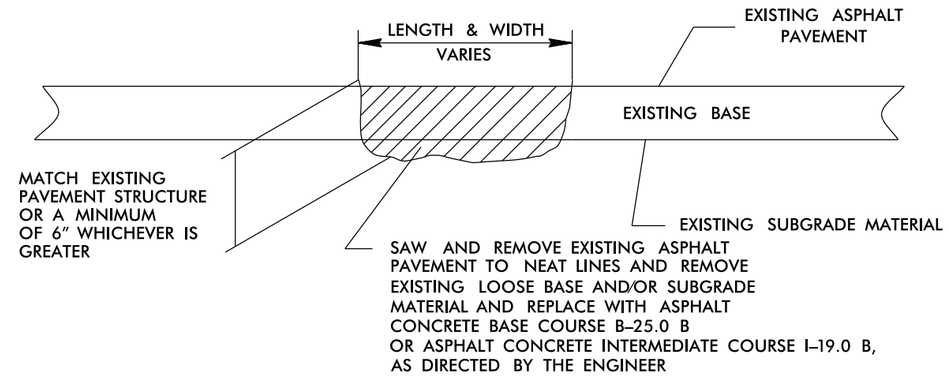

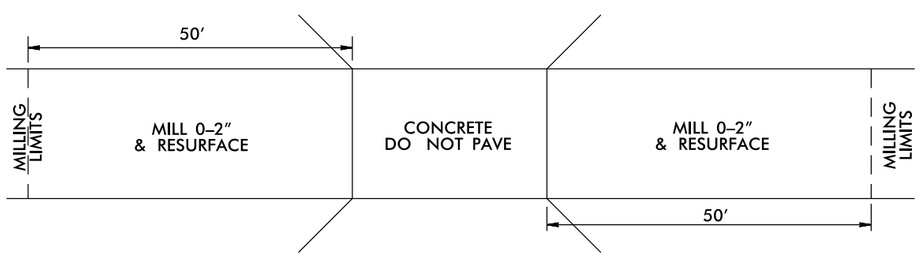

BRIDGE (#24)

USE FOR MAP #1

* MILLING SHALL BE PAID FOR UNDER INCIDENTAL MILLING

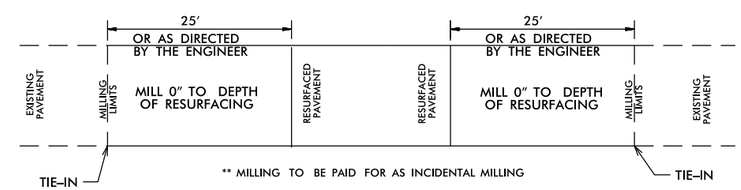

PAVEMENT TIE–IN DETAIL

040397
Lee 13-FEB-2017 08:44
(Mar-ch-2017)\Chatham_Lee_Mar-2017_Submittal\Chatham_Lee_Mar-2017_Submittal\Chatham_Lee_Typicals_Mar-2017.dgn
$$$$USERNAME$$$$