

### RAILROAD PREEMPTION PROGRAMMING DETAIL

(program controller as shown below)

From Main Menu press 'A' (Preemption), then '1' (Standard Preemptions).


PREEMPTION #1	SETTINGS (NEXT:1-10)
INTERVAL/TIMING	CLEAR/DWELL PHASES
GRN YEL RED	12345678910111213141516
1 16 4.1 1.3	X X
2 255 0.0 0.0	X X
3 0 0.0 0.0	
4 0 0.0 0.0	
5 1 0.0 0.0	X X

EXIT CALLS	OPTIONS
PRIORITY (Y/N TO SELECT) .....	HIGH
DELAY TIMER (0-255 SEC) .....	0
MIN GREEN BEFORE PRE (0= DEFAULT)...	1
PED CLEAR BEFORE PRE (0= DEFAULT)...	0
YELLOW CLEAR BEFORE PRE (0= DEFAULT)...	0
RED CLEAR BEFORE PRE (0= DEFAULT)...	0
DWELL MIN TIMER (0-255 SEC) .....	16
DWELL MAX TIMER (0-OFF,1-255MIN) ...	0
DWELL HOLD-OVER TIMER (0-255) .....	0
LATCH CALL? .....	N
LINK TO NEXT PREEMPT? .....	N
ENABLE BACKUP PROTECTION? .....	N
HOLD CLEAR 1 PHASES DURING DELAY? ...	N
FAST GREEN FLASH DWELL PHASES? .....	N
PED CLEARANCE THROUGH YELLOW? .....	N
INHIBIT OVERLAP GREEN EXTENSION? ...	N
SERVICE DURING SOFTWARE FLASH? .....	N
REST IN RED DURING DWELL INTERVAL? ..	N
FLASH DWELL INTERVAL? .....	N
ALLOW PEDS IN DWELL INTERVAL? .....	N
RE-TIME DWELL INTERVAL? .....	N
OVERLAPS:	ABCDEFGHIJKLMNPO
DWELL INT FLASH YELLOW	
OMIT OVERLAPS:	

### RAILROAD PREEMPTION WIRING DETAIL


(wire as shown below)

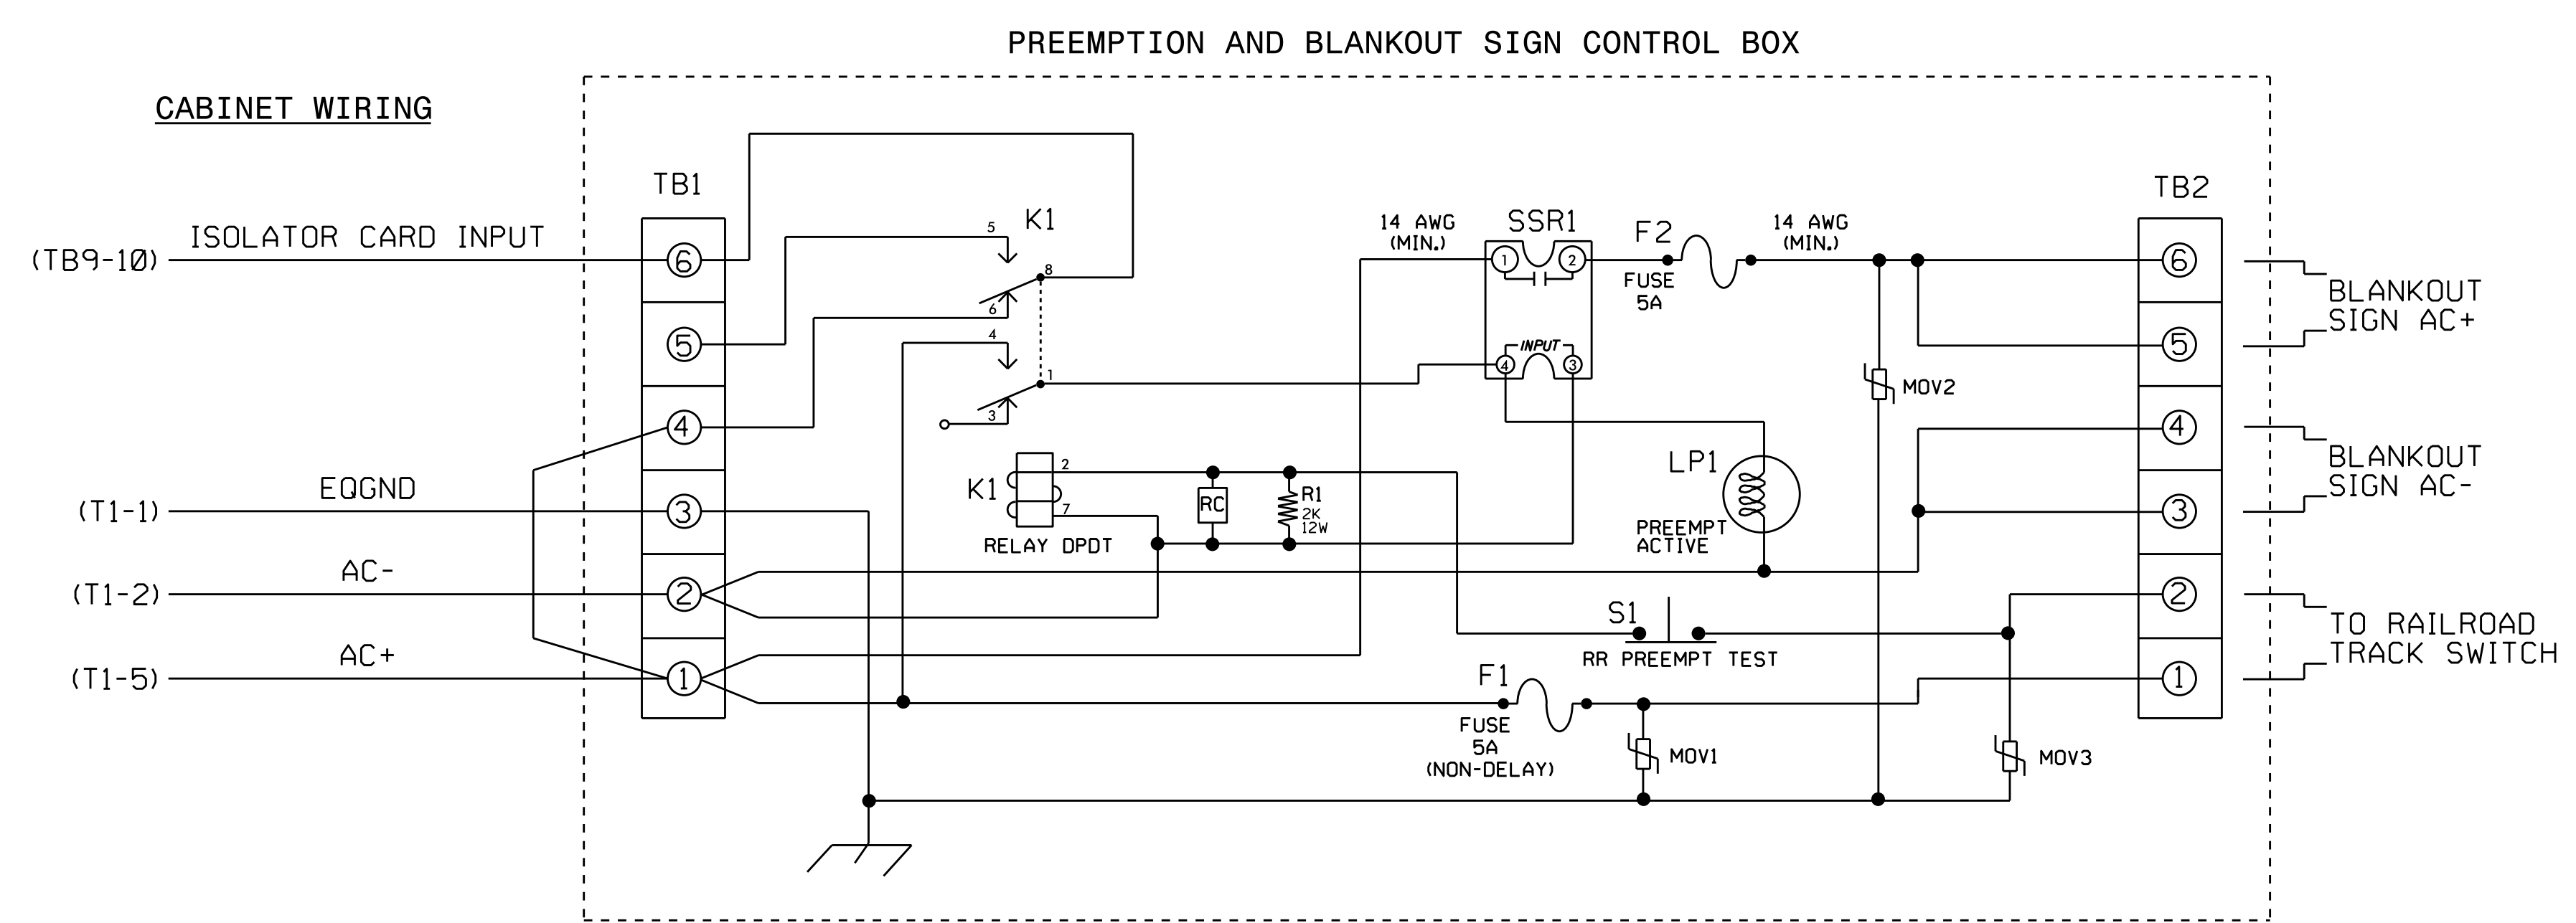

#### NOTES


- Relay K1 is shown in the energized (Preempt not active) normal operation state.
- Relay K1 is a DPDT with 120VAC coil with octal base.
- Relay SSR1 is a SPST (normally open) Solid State Relay with AC input and AC (25 amp) output.
- AC Isolator Card shall activate preemption upon removal of AC+ from the input (as shown above). To accomplish this set invert dip switch on AC Isolator Card.
- IMPORTANT!!** A jumper must be added between input file terminals J14-E and J14-K if not already present. Also, terminal TB9-12 (on input panel) shall be connected to AC neutral (jumper may have to be added).

#### FRONT VIEW

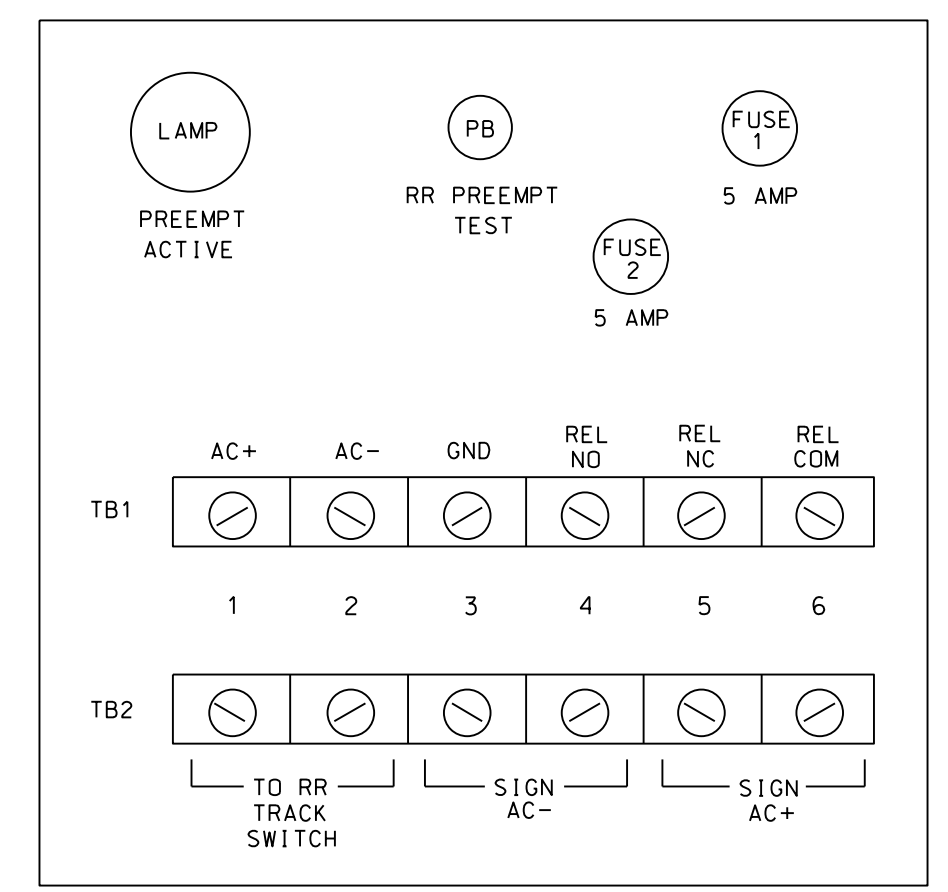

### PREEMPT 1 AC ISOLATOR (MODEL 252) OUTPUT PROGRAMMING DETAIL

(set DIP switches as shown below)

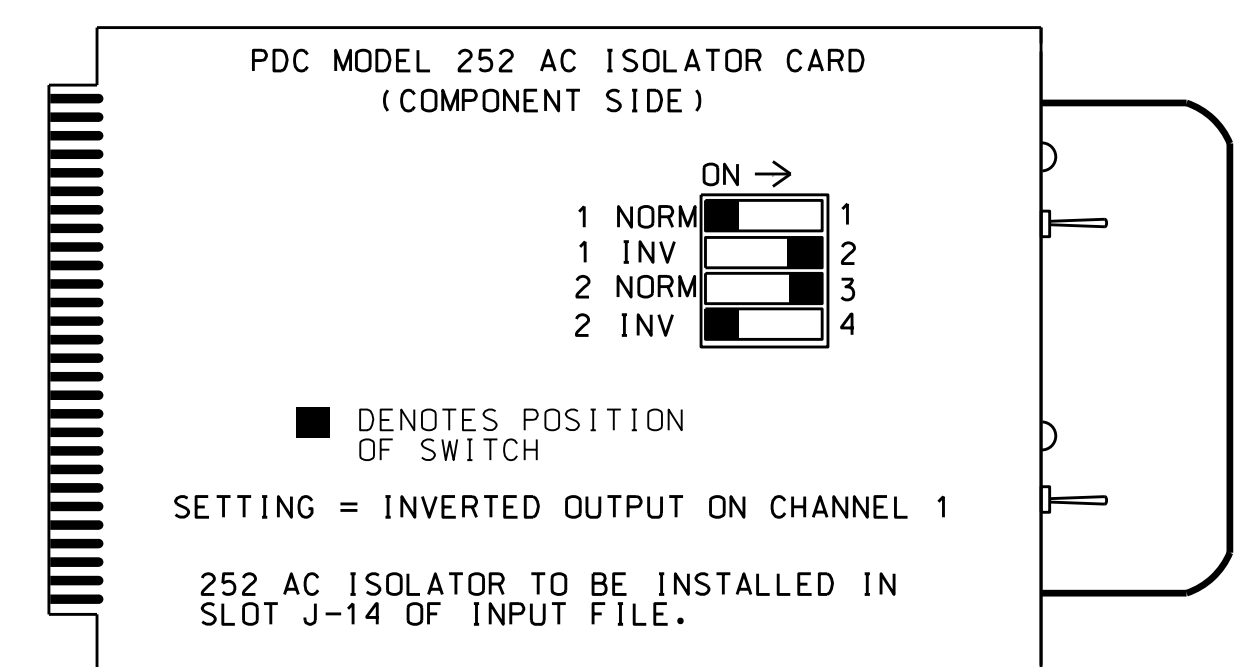

NOTE: IF ANOTHER MANUFACTURER TYPE OF AC ISOLATOR IS USED, OUTPUT PROGRAMMING IS LIKELY NOT TO EQUATE TO THAT SHOWN ABOVE.

THIS ELECTRICAL DETAIL IS FOR THE SIGNAL DESIGN: 13-0384  
 DESIGNED: July 2016  
 SEALED: 10-26-16  
 REVISED: N/A

Electrical Detail - Sheet 2 of 2

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING DETAILS FOR: Prepared In the Offices of: 	SR 1332 (Louisiana Avenue) at SR 1338 (Emma Road)		SEAL 
	Division 13 Buncombe County Asheville PLAN DATE: October 2016 REVIEWED BY: BAS PREPARED BY: James Peterson REVIEWED BY:	REVISIONS INIT. DATE	

DocuSigned by: Keith M. Mims 11/3/2016  
 SIG. INVENTORY NO. 13-0384

09-0000-2016-14516  
 S:\MTS\384\13-Signal\work\hgr\dcp\sig\_Mgmt\ Peterson\130384\_smc.ele\_xxx.dgn  
 J Peterson