

PED 3 PROGRAMMING DETAIL

(program controller as shown below)

CHANGING OUTPUT ASSIGNMENTS

1. FROM MAIN MENU SELECT '6' (OUTPUTS), THEN '1' (OUTPUT ASSIGNMENTS)
2. ENTER 17 (PHASE 8 DW) FOR OUTPUT ASSIGNMENT #.
3. SCROLL DOWN TO 'PEDESTRIAN PHASE' AND ENTER 'Y' REGARDLESS OF DEFAULT PROGRAMMING
4. ENTER '3' FOR 'SELECT PEDESTRIAN PHASE'. NO CHANGE NEEDED FOR 'SELECT COLOR'
5. BACKUP TO 'OUTPUT ASSIGNMENTS AND SETTINGS MENU:' BY PRESSING THE 'ESC' BUTTON ON KEYBOARD.
6. SELECT '1' (OUTPUT ASSIGNMENTS)
7. ENTER 18 (PHASE 8 W) FOR OUTPUT ASSIGNMENT #.
8. REPEAT STEPS # 3 AND # 4.

CHANGING INPUT ASSIGNMENTS

1. FROM MAIN MENU SELECT '7' (DETECTORS), THEN '2' (PEDESTRIAN DETECTOR ASSIGNMENTS)
2. CYCLE TO PED DETECTOR #8 BY REPEATEDLY DEPRESSING '+' KEY
3. MODIFY PHASE ASSIGNED TO PED DETECTOR # 8 FROM PHASE 8 TO PHASE 3

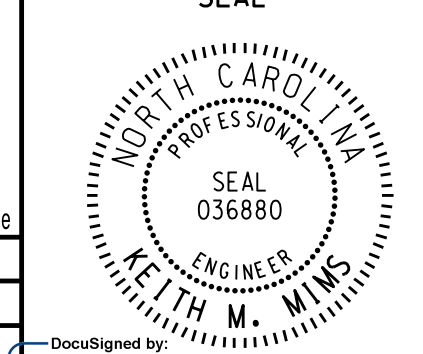
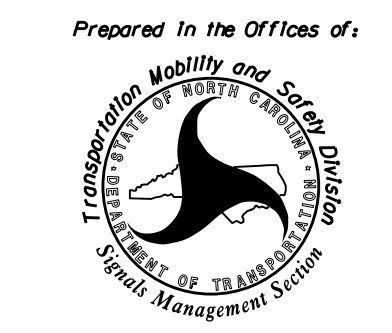

PROGRAMMING COMPLETE

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 13-0512
DESIGNED: February 2016
SEALED: 8/17/2016
REVISED: N/A

2016-08-20 10:07:41
 S:\ITS\ASST\13-0512\Sig\13-0512_Sig.ele.xxx.dgn
 sarmstrong

Electrical Detail - Sheet 2 of 2

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

ELECTRICAL AND PROGRAMMING DETAILS FOR:	US 25 (Hendersonville Road) at Lambeth Dr/Forest Ridge Shopping Center	SEAL 												
	Division 13 Buncombe County Asheville													
	PLAN DATE: July 2016 REVIEWED BY: BAS													
	PREPARED BY: S. Armstrong REVIEWED BY:													
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>REVISIONS</th> <th>INIT.</th> <th>DATE</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>	REVISIONS	INIT.	DATE										DocuSigned by: 
REVISIONS	INIT.	DATE												
	750 N. Greenfield Pkwy, Garner, NC 27529	9/7/2016 DATE SIG. INVENTORY NO. 13-0512												