


SUMMARY OF WORK BY CABLE ROUTING PLANS

CABLE ROUTING SHEET NUMBER	MESSENGER CABLE (1/4")	BOND MESSENGER CABLE	TRACER WIRE	UNDERGROUND CONDUIT (1 CONDUIT, 1 INCH)	UNDERGROUND CONDUIT (1 CONDUIT, 2 INCH)	UNDERGROUND CONDUIT (2 CONDUIT, 2 INCH)	DIRECTIONAL DRILL (2 CONDUIT, 2 INCH)	DIRECTIONAL DRILL (1 CONDUIT, 2 INCH)	JUNCTION BOX (OVER-SIZED)	JUNCTION BOX (SPECIAL -SIZED)	REMOVE EXISTING JUNCTION BOX	DELINEATOR MARKER	STANDARD GUY ASSEMBLY	AERIAL GUY ASSEMBLY	SIDEWALK GUY ASSEMBLY	1" RISER WITH WEATHERHEAD FOR CCTV ELEC SERVICE	1" RISER WITH WEATHERHEAD FOR CAT 5E OR COMPOSITE	1" RISER WITH HEAT SHRINK TUBING	1.25" RISER WITH HEAT SHRINK TUBING	2" RISER WITH HEAT SHRINK TUBING	HEAT SHRINK TUBING RETROFIT KIT	DRILL CORE DRILL EXIST FOUNDATION
	LF	EA	LF	LF	LF	LF	LF	LF	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA
CRP-6.067	1,380	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	1
CRP-6.068	1,250	3	770	-	-	400	370	-	4	1	-	1	4	-	-	-	1	-	1	2	-	-
CRP-6.069	830	2	570	-	-	340	230	-	3	-	-	1	1	-	1	-	-	-	2	-	-	
CRP-6.070	980	3	540	-	-	490	50	-	3	1	-	1	5	-	-	-	-	-	3	-	-	
CRP-6.071	820	1	620	-	-	170	450	-	4	-	-	1	1	-	-	-	-	-	1	-	-	
CRP-6.072	530	2	810	-	-	270	540	-	5	1	-	3	1	-	1	-	-	-	2	-	-	
CRP-6.073	1,380	-	-	-	-	-	-	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-
CRP-6.074	1,460	1	20	-	20	-	-	-	1	-	-	-	1	-	-	-	-	-	1	-	-	
CRP-6.075	770	2	720	-	-	480	240	-	3	1	-	2	3	1	-	-	-	-	2	-	-	
CRP-6.076	50	1	1,540	-	-	740	800	-	6	1	-	3	-	-	1	-	-	-	1	-	-	
CRP-6.077	1,320	1	40	-	40	-	-	-	1	-	-	-	3	-	-	-	-	-	1	-	-	
CRP-6.078	1,470	1	-	-	-	-	-	-	-	-	-	-	1	-	-	-	-	-	-	-	-	
CRP-6.079	1,350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.080	1,440	1	160	-	-	-	160	-	2	-	-	-	6	-	-	-	-	-	1	-	-	
CRP-6.081	1,410	1	60	-	-	-	60	-	2	-	-	-	4	-	-	-	-	-	1	-	-	
CRP-6.082	1,520	2	640	-	-	-	640	-	6	-	-	-	4	-	-	-	1	-	2	-	-	
CRP-6.083	810	1	780	-	-	20	-	-	-	1	1	-	3	-	-	-	-	-	1	-	-	
CRP-6.084	1,070	1	480	-	-	-	100	-	1	1	1	-	5	-	-	-	-	-	1	-	-	
CRP-6.085	1,510	1	20	-	20	-	-	-	-	-	-	-	6	-	-	-	-	-	1	-	-	
CRP-6.086	730	3	770	-	20	370	380	-	6	1	-	3	4	-	-	-	-	-	3	-	-	
CRP-6.087	1,540	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	
CRP-6.088	440	1	980	-	-	790	190	-	3	1	-	1	1	-	-	-	-	-	1	-	-	
CRP-6.089	-	-	1,190	-	-	760	430	-	8	-	-	1	-	-	-	-	-	-	-	-	-	
CRP-6.090	1,310	2	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	1	1	-	-
CRP-6.091	1,460	1	-	-	-	-	-	-	-	-	-	-	3	-	-	-	-	-	-	-	-	-
CRP-6.092	1,430	2	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1	-	1	
CRP-6.093	1,550	2	10	-	-	-	-	-	-	-	-	-	3	1	-	-	-	-	-	-	1	-
CRP-6.094	1,450	1	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-
CRP-6.095	1,440	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.096	1,750	1	-	-	-	-	-	-	-	-	-	-	7	-	-	-	-	-	-	-	-	-
CRP-6.097	1,400	1	-	-	-	-	-	-	-	-	-	-	4	-	-	-	-	-	-	-	-	-
CRP-6.098	1,440	1	-	-	-	-	-	-	-	-	-	-	3	1	-	-	-	-	-	-	-	-
CRP-6.099	1,470	1	-	-	-	-	-	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-
CRP-6.100	1,450	1	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-
CRP-6.101	190	2	40	-	-	-	-	-	-	-	-	-	1	-	-	-	-	-	-	-	1	-


21-DEC-2016 14:20 G:\Transportation\Traffic\AShev\11_Typ_SDW\Volume 1\Main Directory\CRP-1.006.dgn WILE2054 AT DUS300019

- Work shown on this sheet is a summary of work for the installation of the fiber-optic cable and CCTV installations that are shown on the cable routing plans (i.e. CRP sheets). Work to be done for traffic signals is shown separately on the signal designs and the "Summary of Work by Intersection" sheets in Volume III of III.
- The items listed above are for informational purposes only and represent work that is necessary to complete the project and are not necessarily pay items. See Summary of Quantites and the Project Special Provisions for defined Pay Items for this contract.

ATKINS 1616 EAST MILLBROOK ROAD, SUITE 310
RALEIGH, NORTH CAROLINA 27609
(919) 876-8888 NCBES #F-0326

Prepared for the Offices of:		Asheville Signal System	
		Summary of Work by Cable Routing Plans (sheet 7 of 30)	
Transportation		Division 13 Buncombe County Asheville	
750 Greenfield Parkway, Garner, NC 27529		PLAN DATE: December 2016	REVIEWED BY: M B Toth
NTS		PREPARED BY: J A Wiles	REVIEWED BY:
		REVISIONS	INIT. DATE

SEAL

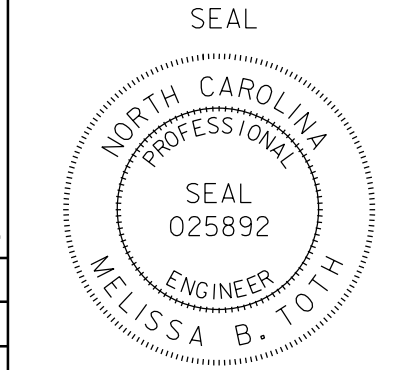

Designed by: *Melissa B. Toth* 12/21/2016
DATE

CADD File name: CRP-1.006.dgn

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED