


SPLICE ENCLOSURE NO. S5-3

DEVICE ID	CRP SHEET	CABLE X			CABLE Y		
		CABLE NUMBER	ALONG ROUTE	TO	CABLE NUMBER	ALONG ROUTE	TO
13-0566	CRP-6.265	5E	US 25A (SWEETEN CREEK RD)	MILLS GAP RD	5E	US 25A (SWEETEN CREEK RD)	ROYAL PINES DR
13-0680	CRP-6.269	5D	US 25A (SWEETEN CREEK RD)	MILLS GAP RD	5D	US 25A (SWEETEN CREEK RD)	WESLEY DR

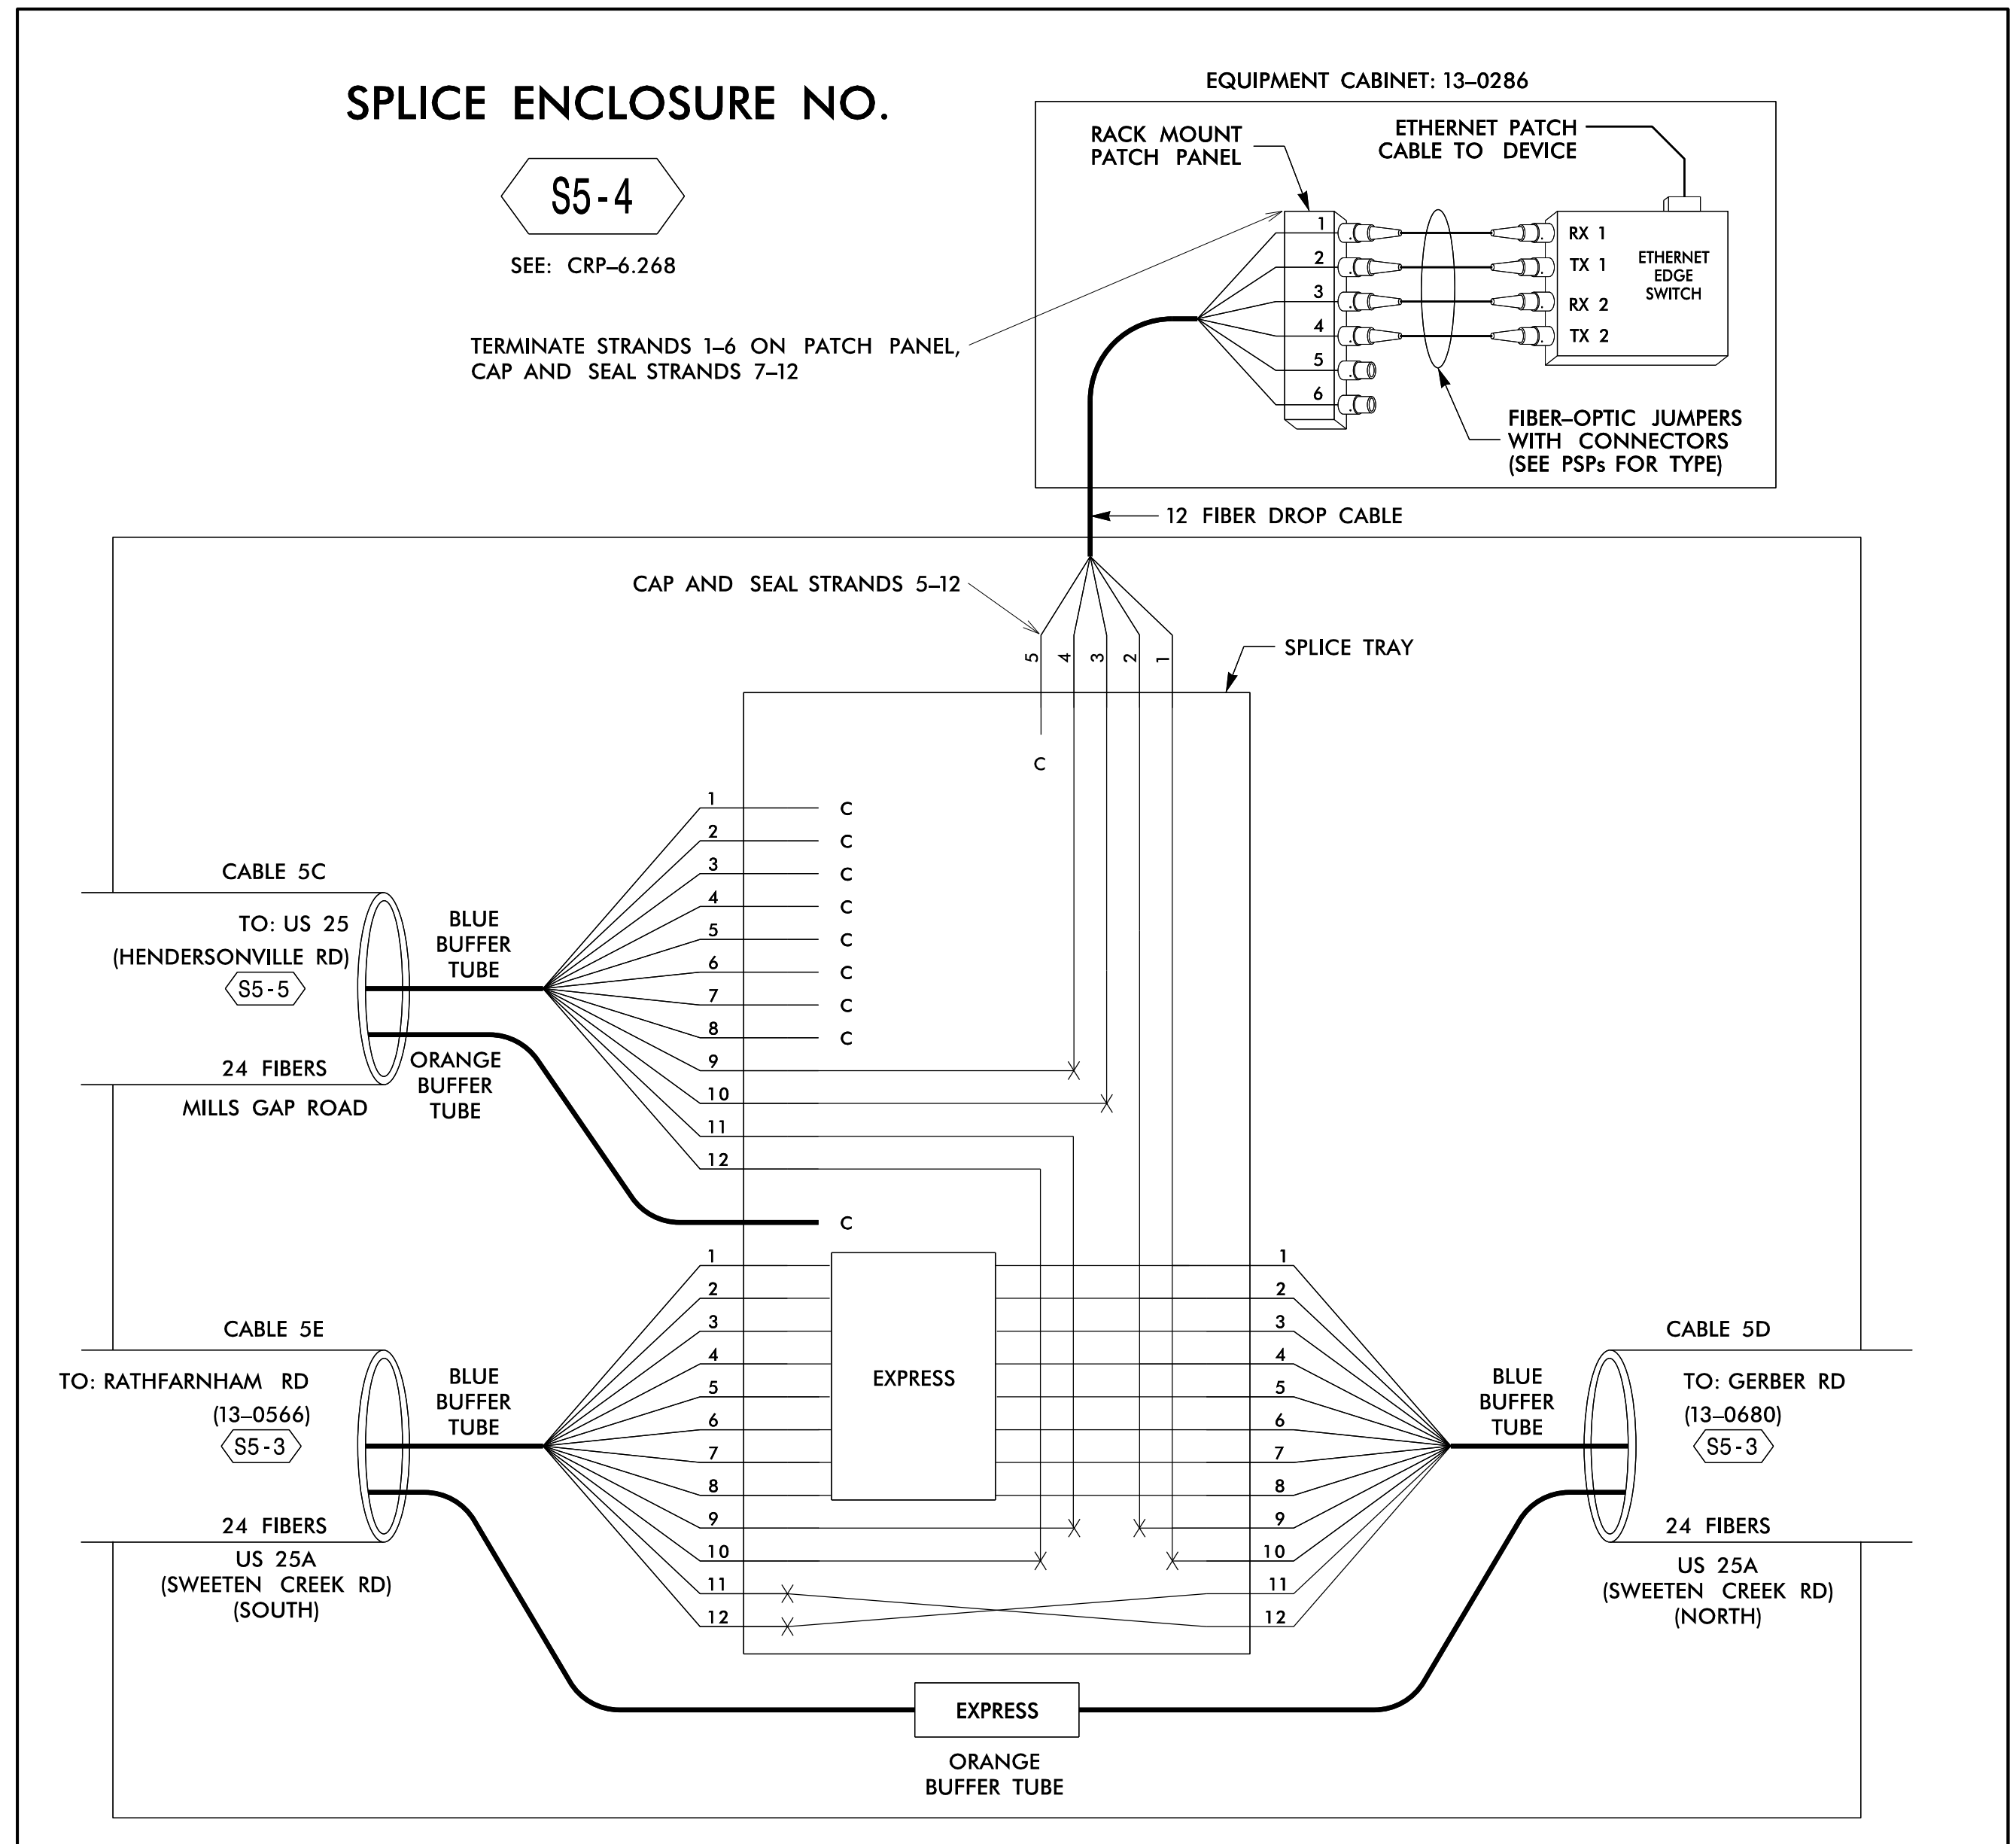

17-Jan-2017 15:02  
 D:\projects\transportation\tr\off\c\curr\100048632\_U-4715B\_Ashville\11e\_Sig\_System\Task 11\_Comms\Inoal\_Microstation\_Files (Renamed\_Merged)\U-4715B\_FS-4\_18.dgn  
 00107303 AT LUS355195

**LEGEND**

(1) BLUE	(7) RED	X = FUSION SPlice INDIVIDUAL FIBER
(2) ORANGE	(8) BLACK	C = CAP AND SEAL
(3) GREEN	(9) YELLOW	EXPRESS = EXPRESS ENTIRE BUFFER TUBE / FIBERS THROUGH WITHOUT CUTTING
(4) BROWN	(10) VIOLET	BUFFER SPlice = SPlice ALL FIBERS IN BUFFER TUBE COLOR TO COLOR
(5) SLATE	(11) ROSE	
(6) WHITE	(12) AQUA	

- NOTES**
- UNUSED FIBERS LEFT COILED AND STORED IN SPLICE TRAY
  - UNUSED BUFFER TUBES LEFT COILED AND STORED IN SPLICE ENCLOSURE
  - EDGE SWITCH CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING/ENSURING THE PROPER TERMINATIONS.

**ATKINS**

1616 EAST MILLBROOK ROAD, SUITE 310  
 RALEIGH, NORTH CAROLINA 27609  
 (919) 876-6888 NCBEEES #F-0326

DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

Prepared for the Offices of:

**NC**

**Transportation**

750 Greenfield Parkway, Garner, NC 27529

**Asheville Signal System  
Fiber-Optic Splicing Details**

Division 13 Buncombe County Asheville

PLAN DATE: December 2016 REVIEWED BY: HA Badgett

PREPARED BY: AM Quigley REVIEWED BY: JT Brooks

REVISIONS	INIT.	DATE

SCALE: NTS

SEAL

Sealed by: *HA Badgett* 1/17/2017

CADD File name: 271\_060\_U-4715B\_FS-4\_18.dgn